

Manuscript prepared for Journalname
with version 3.1 of the \LaTeX class copernicus2.cls.
Date: 27 June 2010

1]I. Flecha (iflecha@ija.csic.es)

2]R. Carbonell (rcarbo@ija.csic.es)

3]R. W. Hobbs (r.w.hobbs@durham.ac.uk)

4]H. Zeyen (zeyen@geol.u-psud.fr)

Some improvements in subbasalt imaging using pre-stack depth migration

I. Flecha¹, R. Carbonell¹, R. W. Hobbs², and H. Zeyen³

¹Departament de Geofísica i Tectònica, Institut de Ciències de la Terra “Jaume Almera”-CSIC, C/ Lluís Solé i Sabaris s/n, 08028 Barcelona, Spain. Tel.: +34 93 409 54 10; fax: +34 93 411 00 12

²Dept. of Earth Sciences, Univ. of Durham, Durham DH1 3LE, UK. Tel.: +44 (0) 191 33 44295; fax: +44 (0) 191 33 44301

³Departement des Sciences de la Terre, Université de Paris-Sud, Bat. 503, F-91405 Orsay Cedex, France. Tel.: +33-(0)1 69 15 40 09; fax: +33-(0)1 69 15 49 11

Subbasalt imaging can be improved by carefully applying pre-stack depth migration. Pre-stack depth migration requires a detailed velocity model and an accurate traveltimes calculation. Ray tracing methods are fast but, often fail in calculating traveltimes in complex models, specially, when they feature high velocity contrasts. Finite difference solutions of the eikonal are more stable and can produce a traveltimes field for the whole model avoiding shadow zones. A synthetic test was carried out to check the performance of a new pre-stack depth migration algorithm in a model that features a high velocity layer surrounded by lower velocities. The results reasonably reproduce the original model. The same scheme was used to process long-offset reflection data from the Faroe Shelf where conventional techniques (stack) were insufficient to assess the structure under a basalt layer. Pre-stack depth migration produced an improved image which recovered the main features in the stacked section and allowed to identify some subbasalt coherent events.

1 Introduction

Seismic imaging comprises a wide range of methodologies. Among these techniques, the most common in geophysical prospecting is seismic reflection, which has provided valuable data to infer the subsurface structure. Seismic reflection principles are based on approximations that simplify the imaging problem, two of the most restrictive are: the Earth is considered as a sequence of homogeneous subhorizontal layers and interfaces between layers consist in a vertically sharp and laterally smooth discontinuity (Yilmaz, 1987). Processing flows deduced from these premises generate detailed images in layered and laterally homogeneous media. However, in nature, there are often geological settings where these assumptions fail dramatically, and the methodology based on

them is going to be insufficient. This is the case in basalt covered areas and beneath salt intrusions. The presence of a high-velocity and highly heterogeneous layer (basalt) embedded in low-velocity sediments, has a detrimental effect on imaging beneath this structure (Martini and Bean, 2002). The basalt acts as a barrier for seismic signal. Most of the energy reflects or travels along this layer, therefore little energy goes through the basalt layer. In addition, the backscattered energy that returns to the surface from basalt and subbasalt structures features a lack of coherence caused by the irregular interfaces of the basaltic body and the heterogeneities within the basalt itself. Hence, in this case a more sophisticated approach, such as pre-stack depth migration, is needed.

The North Atlantic province has been widely studied by the oil industry. Standard seismic imaging techniques have been successfully applied for many years in the sedimentary basins located in this area. The Faroe-Shetland Basin represents a potential hydrocarbon reservoir ready for exploration. To the center of the basin, geology is well known but, in the NW region, sequences of basalt cover underlying structures and make exploration both challenging and risky (Sørensen, 2003). In the present study, a new pre-stack depth migration scheme was implemented to address the subbasalt imaging problem. This manuscript shows the improvements obtained by this pre-stack depth migration approach applied to data acquired over the Faroe Shelf.

2 Geological and geophysical setting

In the Faroe-Shetland Basin, huge amounts of basaltic rock were erupted during the Paleocene-Eocene. Previous studies suggest this basalt is covering relatively low velocity materials which may be sediments (Hughes et al., 1998; Richardson et al., 1999; Fließner and White, 2003; Raum et al., 2005). Topography before the emplacement of the basalt was dom-

Correspondence to: [

inated by normal faults as a consequence of extension and subsidence during the Cretaceous and Paleocene (Richardson et al., 1999). Basaltic flows extended over long distances in the basin after filling the lows between fault blocks. This causes an irregular bottom basalt interface. Basalt was erupted in different episodes. Three major basalt units have been identified: Lower, Middle and Upper Series. Their thicknesses and compositions differ from one unit to another (Noe-Nygaard and Rasmussen, 1968). Although, the basalt flow stratigraphy in this area is mainly layered, it includes tuffs and breccias increasing the inner velocity contrasts (Maresh and White, 2005). Moreover, in periods without igneous activity, lacustrine shales and coals were accumulated and sediments were emplaced filling the basin floor deeps (White et al., 2003). Those facts result in a highly heterogeneous distribution of physical properties within the basaltic body.

In the Faroe Shelf, the structure above the basalt and the top basalt interface can be successfully resolved using conventional techniques because of the high contrast in physical properties between basalt and overlying sediments. However, attenuation and scattering of the seismic wavefield as it passes through the basaltic pile make seismic imaging difficult below the top basalt surface (Smallwood et al., 2001). The top basalt interface shows an irregular topography featuring fractal properties (Martini and Bean, 2002). This irregular topography is often at a scale similar to the seismic wavelength which causes the dispersion of elastic energy (scattering) degrading the signal coherence in the wavefield. In addition, heterogeneities within the basalt flows yield a high impedance contrast generating internal reverberations, mode conversions and internal multiples (Martini and Bean, 2002). Therefore, seismic energy reflected or refracted by these structures is incoherently scattered and dispersed resulting in a poor subbasalt image.

3 Pre-stack depth migration

The calculation of traveltimes tables for a given velocity model is an essential stage in Kirchhoff prestack depth migration. Classical ray tracing techniques have been widely used to solve the forward problem (Zelt and Smith, 1992) and to calculate traveltimes tables. Snell's law based algorithms are fast and provide an estimation of the traveltimes for areas in the model sampled by rays traced. However, in some implementations, sampling all the model requires a large amount of rays and depending on the velocity model (e.g. high velocity gradients) some areas can be undersampled resulting in shadow zones where no traveltimes are calculated. Overcoming this problem requires a finite difference approach.

In the present work, we used a finite difference algorithm to solve the eikonal equation (Hole and Zelt, 1995). Using this algorithm, traveltimes are calculated for every node in

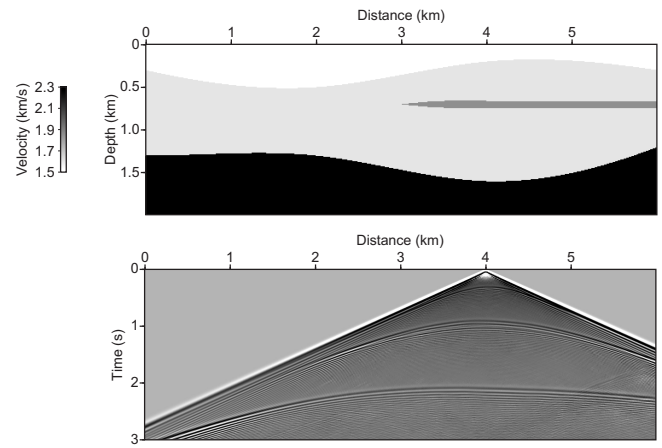


Figure 1. Velocity model used to calculate synthetic data (top) and a shotgather generated at $x = 4$ km (bottom).

the model, which slightly increases the computational cost compared with shooting ray methods, but, on the other hand, shadow zones are avoided. Moreover, using complete traveltimes tables allows the handling of diffractions, correctly restoring the diffracted energy to its original position in the model. As migration consist of summation of the contributions from the wavefield for every source-receiver pair, once the traveltimes field has been calculated, a half-derivative is performed on every trace and amplitudes are spread along the model that has been previously scaled with an obliquity factor (Yilmaz, 1987).

Another key point in pre-stack depth migration is the generation of numerical artifacts that result in “smiling” images. This is a known issue that usually is solved by limiting the aperture in the migration algorithm. This strategy can solve the problem in subhorizontal layered models but it fails when considering complex models with vertical or dipping structures. In any case, if the fold of the data is high, the summation of complete migrated shotgathers contributes to enhance coherent signal while spurious artifacts are highly attenuated in the final image.

We coded this approach into a new pre-stack migration algorithm. In order to test the code, a synthetic model was used (Forel et al., 2005). The model consists in three layers and within the second one, a thin high velocity layer was included to simulate a basaltic intrusion (Fig. 1 top). Up to 40 synthetic shotgathers were calculated for this velocity model using a full waveform acoustic scheme (Fig. 1 bottom). The sources were placed on the surface every 50 m between 2 and 4 km and the receivers were also placed every 50 m at the surface using a split-spread pattern with offset ranging from -1500 m to 1500 m. For every source and every receiver, a traveltimes table was calculated. Then, for every source-receiver pair, their respective traveltimes tables were added to obtain a new traveltimes table which represents, for each grid point, the travel time from source to receiver of a

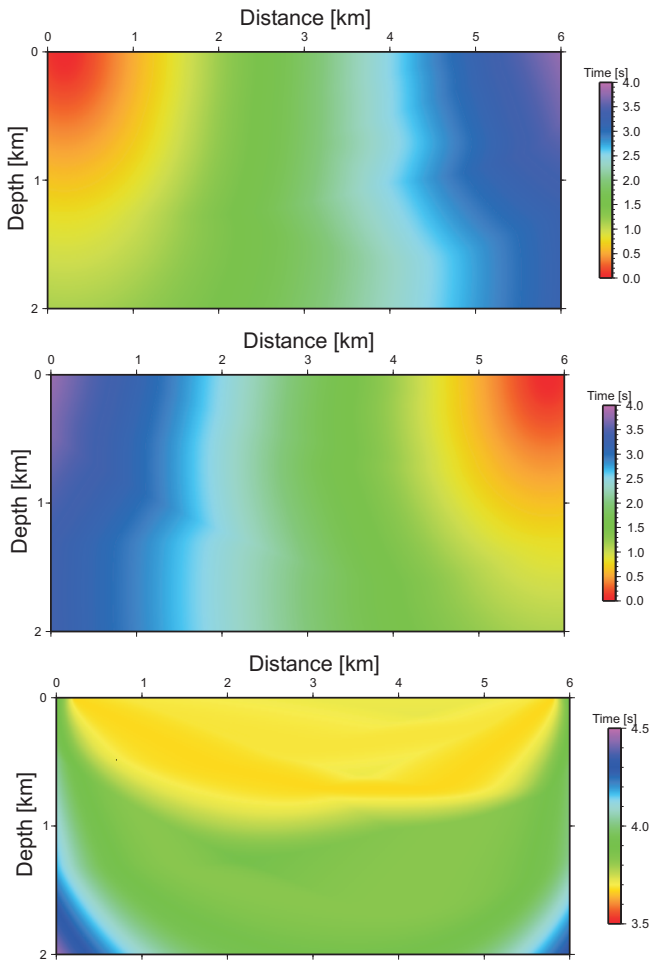


Figure 2. Traveltime tables for the source at $x=0.2$ km (top) for the receiver at $x=5.8$ km (middle) and the summation of both timetables (bottom). These traveltime tables were obtained using a finite difference solution of the eikonal equation (Hole and Zelt, 1995). The yellow and orange colors indicate the zone of minimum traveltimes. This illustrates the fastest path from the source to the receiver within the model (the banana-kernels)

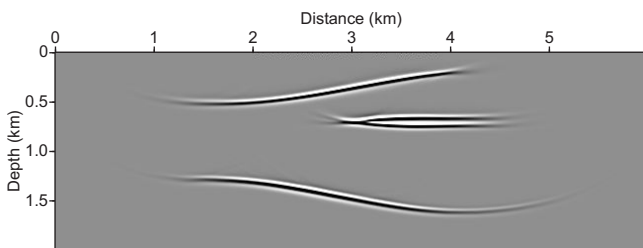


Figure 3. Migrated image of the synthetic example.

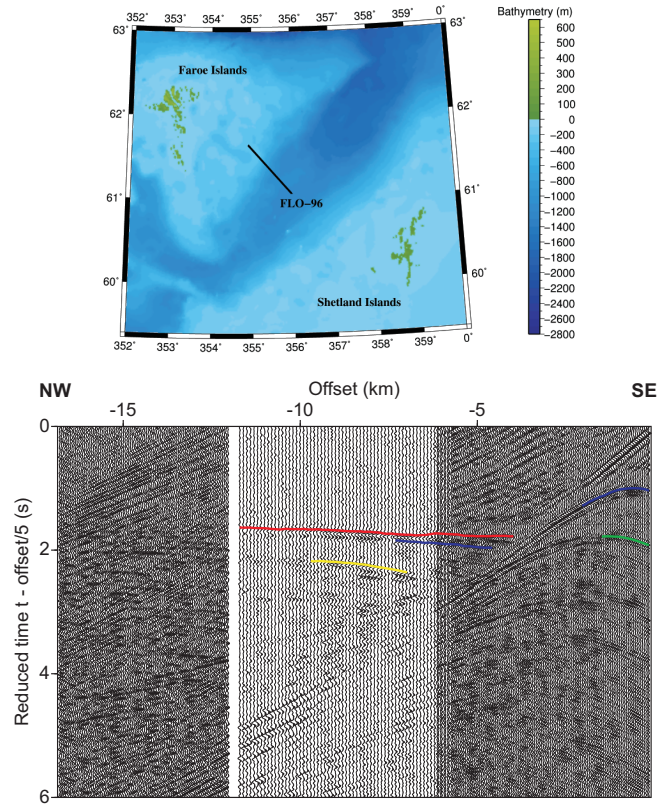


Figure 4. Survey FLO-96. Location map of the profile (top), and shotgather (bottom). In the shot gather the NW corresponds to the left and the SE to the right. The following phases are identified: sea bottom reflection (blue), top-basalt reflection (green), basalt refraction (red), base-basalt reflection (purple) and top-basement reflection (yellow). This shotgather is a composite from the two-ship experiment (see the text for an explanation).

wave crossing this grid point. This new traveltime table becomes the one used in the migration (Fig. 2). Note that the region of minimum traveltimes (banana-kernel) in the resulting traveltime table can be used to obtain (*a posteriori*) the ray trajectory for first arrivals. Every shot in the dataset was migrated and stacked over every node in the model resulting in a final migrated image (Fig. 3). The resulting image reproduces reasonably well the theoretical model.

4 Real case: subbasalt imaging

Data from the survey FLO-96 over the Faroe Shelf (Fig. 4) acquired using two vessels (White et al., 1999) with multiple passes to build up a synthetic aperture of over 38 km with a receiver group spacing of 12.5 m which presents other issues associated with the geometry caused by poorly constrained cable feathering. This dataset features the conventional problems of marine seismic reflection data: multiples, peg-legs,

Table 1. Processing steps applied to data

Processing step	Parameters
Source matching filter	
Assign geometry	
Bandpass filter	high-cut Ormsby 48-64 Hz
Bin	50 m receiver group/25 m CMP spacing
Create Split Spread	aperture -1 km \rightarrow 16.8 km
Surface Related Multiple Suppression (SRMS)	multiple model based on sea-bed inter-sediment horizon and top-basalt picked from near-offset stack
Tau-p filter applied to both common shot and common receiver domains	Gaussian weighted filter with mean slowness of 0.075 ms/m and variance of 0.064 ms/m
Velocity analysis	Semblance, function gather and function stacks
NMO	
Mute	Outer and Inner mute
Stack	
Amplitude recovery	$t^{1.8}$
Display	

and other reverberation; tidal and ambient noise; converted waves etc..

The lead vessel (M/V Western Cove) towed a 6 km cable and deployed a 32 sleeve-gun source array with a total volume of 3000 cu in. The second vessel (I/S Thetis) followed at variable distances and towed a 4.8 km cable and deployed a 30 sleeve-gun source array with a total volume of 5070 cu in. Data acquired using this configuration can be considered from two points of view: as a standard normal incidence experiment; or as a very dense wide-angle experiment. This combination gave an effective aperture of 16.8 km. The basic processing steps are laid out in Table 1; the philosophy was: to enhance the low frequency energy; suppress sea-bed, sediment and top-basalt multiples, peg-legs and other reverberations; suppress other low velocity energy; and stack using a velocity model based on conventional analysis. The sub-basalt velocity model was determined from the occasional strong reflection event visible above the noise probably from a sill or top basement.

From the stacked image (Fig. 5 top) we can interpret the structure overlying the basalts and obtain a detailed velocity model for these sediments. We can also map the topography of the top-basalt. However, using conventional post stack imaging techniques, no laterally coherent events are identified under this high velocity layer (Fig. 5 top). In order to improve this image beneath the basalt, pre-stack depth migration was applied using the pre-stack data after SRMS and Tau-p filtering had been applied. This provides more detailed image of the subbasalt zone. While stack-based methodologies produce a section in time, pre-stack depth migration will result in a depth section which provides information for a better interpretation.

The main advantage of considering long offset streamer data is that long offset phases may be identified, providing information to perform tomographic inversions. In standard

marine seismic reflection data, most of the signal and energy lie within the water-wave cone and therefore are affected by multiples and peg-leg making it very difficult to identify phases. At long offset these reflections appear as clear and isolated events and refractions can be picked as clear arrivals. The use of long offset data therefore considerably improves the accuracy and quality of the velocity model with respect to the usual velocity analysis in the CDP domain.

In the first part of the profile, refractions from basalt and reflections from the top of the basalt layer are very clear. In some shots, two hyperbolic events can be picked and interpreted as the base-basalt reflection and the top-basement reflection (Fig. 4). In the last part of the profile, the top-basalt reflection could be identified while the basalt refraction completely disappeared. This is due to the thinning of the basalt layer to the SE. Also in this part, some hyperbolic events were identified in the data out of the water-wave cone, but, due to the lack of lateral continuity (events only appeared for four or five shots), these events were interpreted as sills or laminar intrusions rather than a laterally continuous geological discontinuity. Inverting basalt refractions, top-basalt reflections, base-basalt reflections and basement reflections, a velocity model was obtained down to the top of the basement (coloured background in Fig.5 bottom). The velocity model was obtained using the tomographic algorithm by Trinks et al. (2005). This algorithm is able to use diving as well as reflected waves. Therefore it recovers the velocity distribution and the topography of the reflecting structures. In this study, the reflected phases were used to increase the resolution of the velocity model. The pre-stack migration algorithm only required the distribution of velocities to generate the depth migrated image. The reflecting interfaces constrained by the tomographic algorithm were not used. The image produced correlates very closely with the interfaces constrained by the inversion algorithm.

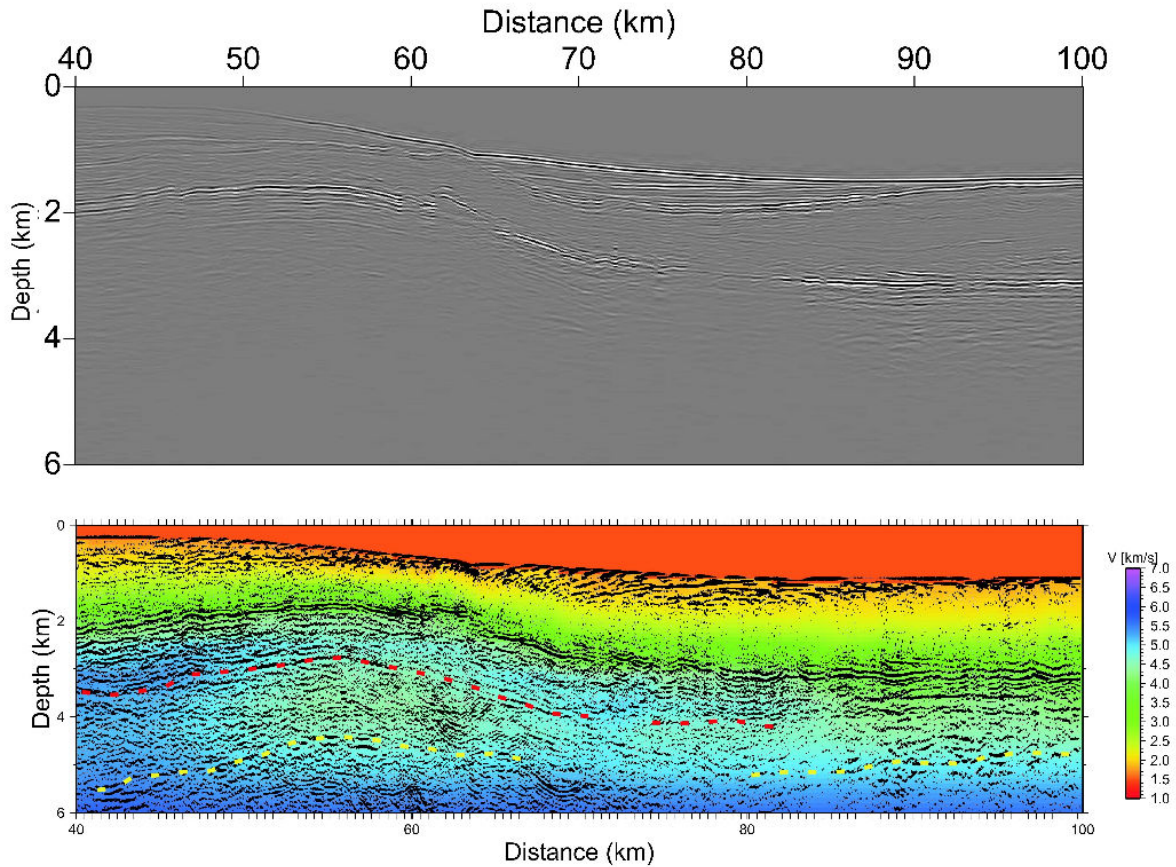


Figure 5. Top: stacked section from the FLO-96 survey. The top of basalt is clearly delineated. At the beginning of the profile (NW) basalt is shallower (around 1.8 s) becoming deeper from kilometer 60 to kilometer 75 where it remains practically flat around 3 s until the end of the profile (SE). No coherent subbasalt events can be identified. Bottom: Pre-stack depth migration of the same data set. The coloured background stands for the velocity model obtained by means of seismic tomography (Trinks et al., 2005). Dashed lines stand for interpreted base of basalt (red) and top of basement (yellow).

The sedimentary cover features velocities ranging from around 2 km/s at the sea bottom to 3.5 km/s at the top of the basalt layer. A high velocity layer (4.5–5 km/s) can be identified with a decreasing thickness from 1.5 km at 40 km to 0.5 km at 100 km. The inverted model suggests that there may be a lower velocity layer under the basalts. Nevertheless, few events were identified from under the basalt layer, suggesting velocities in this area are less constrained than in other parts of the model. The lack of events within the basement made it impossible to extend the tomographic model beyond 6 km depth. The new pre-stack depth migration scheme was used to obtain a new image using the velocity determined by the tomographic inversion (Fig. 5 bottom). This method provided an improved display under the upper basalt interface where prominent events correlate with major velocity discontinuities along the whole model. The top of the basalt is clearly delineated. The base of this layer can be estimated

in some parts of the model, especially along the first 30 km. In addition, some reflectors exist between 4 and 5 km depth which may correspond to the top of the basement.

The determination of the base of the basalt layers is a key issue for exploration perspectives. Sedimentary layers can be located between the basalt intrusive and the basement. The importance of imaging these hidden sedimentary structures to gauge potential petroleum resources becomes clear.

Some authors have proposed an alternative scheme for migrating long offset reflection data (Fruehn et al., 2001; Fliedner and White, 2001; White et al., 2003; Fliedner and White, 2003). Their scheme uses only selected signal out of the water-wave cone. Following this strategy a low frequency image was produced because only long offset phases were included. In the present study, all the data in every shotgather were used in the process, obtaining a more detailed image because high frequencies were also included in the migra-

tion. Migrating selected parts of the shotgathers causes final image to be highly dependent on a subjective interpretation undertaken prior to the migration. This interpretation was considered when inverting traveltimes. Migrating the whole data set has the advantage of obtaining a migrated section free of *a priori* interpretations. Moreover, in regions where intra-basalt and subbasalt events are weak, the reflectors are more clearly displayed using all the data as shown in the last part of the profile.

5 Conclusions

Pre-stack depth migration provided improvement in sub-basalt imaging. The code developed to implement this technique takes advantage of a finite difference algorithm that can handle sharp velocity contrasts and velocity inversions avoiding shadow zones in the traveltime tables. Synthetic simulations using a realistic model showed a good performance of the code and good recovery of the original model. The code was then used with real data from the FLO-96 survey. This processing showed that pre-stack depth migration improved the image obtained beneath the top of the basalt layer. In the final image, the base of the basalt was inferred in some parts of the model and subbasalt events were recovered. The results indicate that all offsets are required to produce a high frequency pre-stack depth migration image. The migrated section is highly dependent on the velocity model, therefore, using an accurate tomographic model is mandatory to obtain a reliable result.

Acknowledgements. Funding for this research was provided by SINDRI (Quantitative evaluation of the existing technologies for imaging within basalt-covered areas from the Faroes region), the Spanish Ministry of Science and Technology (Ref: CGL2004-04623/BTE) and Generalitat de Catalunya (Ref: 2005SGR00874). Part of this work was developed during a one month stay in Orsay financed by Université Paris-Sud. We are grateful to Immo Trinks for training in the use of the TTT code.

References

- Fliedner, M. M. and White, R. S.: Sub-basalt imaging the Faeroe-Shetland Basin with large-offset data., *First Break*, 19, 247–252, 2001.
- Fliedner, M. M. and White, R. S.: Depth imaging of basalt flows in the Faeroe-Shetland Basin., *Geophys. J. Int.*, 152, 353–371, 2003.
- Forel, D., Benz, T., and Pennington, W. D.: *Seismic Data Processing with Seismic Unix*, Society of Exploration Geophysicists, 2005.
- Fruehn, J., Fliedner, M. M., and White, R. S.: Integrated wide-angle and near-vertical subbasalt study using large-aperture seismic data from the Faeroe-Shetland region, *Geophysics*, 66, 1340–1348, 2001.
- Hole, J. A. and Zelt, B. C.: Three-dimensional finite-difference reflection travel times., *Geophys. J. Int.*, 121, 427–434, 1995.
- Hughes, S., Barton, P. J., and Harrison, D.: Exploration in the Shetland-Faeroe Basin using densely spaced arrays of ocean-bottom seismometers., *Geophysics*, 63, 490–501, 1998.
- Maresh, J. and White, R. S.: Seeing through a glass, darkly: strategies for imaging through basalt., *First Break*, 23, 27–33, 2005.
- Martini, F. and Bean, C. J.: Interface scattering versus body scattering in subbasalt imaging and application of prestack wave equation datuming., *Geophysics*, 67, 1593–1601, 2002.
- Noe-Nygaard, A. and Rasmussen, J.: Petrology of a 3000 metre sequence of basaltic lavas in the Faroe Islands., *Lithos*, 1, 286–304, 1968.
- Raum, T., Mjelde, R., Berge, A. M., Paulsen, J. T., Digranes, P., Shimamura, H., Shiobara, H., Kodaira, S., Larsen, V. B., Fredsted, R., Harrison, D. J., and Johnson, M.: Sub-basalt structures east of the Faroe Islands revealed from wide-angle seismic and gravity data., *Petroleum Geoscience*, 11, 291–308, 2005.
- Richardson, K. R., White, R. S., England, R. W., and Fruehn, J.: Crustal structure east of the Faroe Islands: mapping sub-basalt sediments using wide-angle seismic data., *Petroleum Geoscience*, 5, 161–172, 1999.
- Smallwood, J. R., Towns, M. J., and White, R. S.: The structure of the Faeroe-Shetland Trough from integrated deep seismic and potential field modelling., *J. Geol. Soc.*, 158, 409–412, 2001.
- Sørensen, A. B.: Cenozoic basin development and stratigraphy of the Faroes area., *Petroleum Geoscience*, 9, 189–207, 2003.
- Trinks, I., Singh, S. C., Chapman, C. H., Barton, P. J., Bosch, M., and Cherrett, A.: Adaptive traveltime tomography of densely sampled seismic data., *Geophys. J. Int.*, 160, 925–938, 2005.
- White, R. S., Fruehn, J., Richardson, K. R., Cullen, E., Kirk, W., Smallwood, J. R., and Latkiewicz, C.: Faroes Large Aperture Research Experiment (FLARE): imaging through basalt, pp. 1243–1252, Geological Society, 1999.
- White, R. S., Smallwood, J. R., Fliedner, M. M., Boslaugh, B., Maresh, J., and Fruehn, J.: Imaging and regional distribution of basalt flows in the Faeroe-Shetland Basin., *Geophys. Prosp.*, 51, 215–231, 2003.
- Yilmaz, O.: *Seismic data processing*, Society of Exploration Geophysicists, Tulsa, 1987.
- Zelt, C. A. and Smith, R. B.: Seismic traveltime inversion for 2-D crustal velocity structure., *Geophys. J. Int.*, 108, 16–34, 1992.