

## General Comments RC1:

1.	Manuscript structure:		Line numbers refer to the annotated version of the revised manuscript.
1.1:	<p>For any generic numerical study, appropriate input parameters and real-world analogs are important.</p> <p>I would therefore recommend to merge the first part of the “Discussion” (lines 312-327) with the “Introduction” and to move or even repeat some parts in the “Methods” section, in particular the “Scenarios” section.</p> <p>The reader of the manuscript would greatly benefit from a direct real world example for the chosen permeabilities, porosities and in particular background hydraulic gradients (BHG) right in the “Methods” section.</p>	<p>We agree with the reviewer and will in agreement with the comments of reviewer 2 improve the Introduction regarding this matter. We will now introduce the values we used for permeability, porosity and BHG in the Introduction and discuss how these compare to typical values for sedimentary basins worldwide.</p> <p>With our manuscript, we, however, present a non-site specific, numerical sensitivity study that investigates the influence of various reservoir parameters on geothermal reservoir lifetimes and how exactly they have to be known to provide reliable estimates on the lifetime of a geothermal reservoir.</p> <p>For this reason, we did not only chose parameter values for permeability and porosity that are desired in geothermics, but also values that lie above and below them. Since our sensitivity study is not site specific, we only present real world scenarios in the discussion (see also point 8.1). This is why we prefer to keep the current structure of our manuscript.</p>	<p>Changes made in lines 58-86.</p> <p>To accommodate the changes suggested all the reviewers, we now decided to present permeabilities and porosities of geothermal reservoir rocks in general.</p>
1.2	<p>Especially, the various BHGs require some geological scenarios (what can cause a directed BHG? Topography, overpressure, ...?). Also, the authors might consider merging the entire discussion with the results section for better readability.</p>	<p>We agree with the reviewer and see the necessity to explain in more detail in the introduction why we choose to investigate the influence of the BHG and provide examples of settings in which BHGs are to expect or in which they have been observed. We will also justify the values we used for the BHG’s magnitude, and refer to the according literature e.g. Fan et al. (2013, Science), Gleeson et al. (2016, NGS) and Grauls (1999).</p> <p>We, however, prefer, regarding the second point addressed here, to keep the results and the discussion sections separate.</p>	<p>Changes made in lines 58-66.</p>
2.	Convection:		

2.1	<p>Convection is not considered in the numerical modelling to save computational cost. As the authors state correctly, convection is likely to be neglected in sediment layers. However, in fault zone-controlled reservoirs, convection is known to have a big impact on the initial temperature field (e.g. Soultz-sous-Forets). Please at least discuss the possible impact of convection on this study's results related to fault zones or consider running a few models that account for convective flow to highlight the impact.</p>	<p>We agree that faults/fault zones can have significant heat flow by density-driven convection. We are also aware, as the reviewer states, that there are several real world examples of faults in which free convection has been observed and we will include this fact in the discussion. However, in many scenarios it is also likely that, due to the heterogeneous nature of faults, convection is not present. However, there a very few published examples in the literature. Our models likely underestimate the lifetime of fault-related reservoirs, because they do not include density-driven convection and thus heat supply from deeper levels. The effect of density-driven convection, however, at least to a certain degree, would be to counteract the negative influence of the channeling effect of a fault (<b>see also points 7.4 and 7.6</b>). Regarding the reviewer's suggestion to rerun these models with density-driven convection, would mean that these scenarios are not comparable anymore with the other parts of our study. We will follow the reviewer's suggestion and will now address the possible effects of density driven convection in the discussion section.</p>	<p>Changes made in lines 142-144 and 534-538.</p>
3.	<p><b>Bottomhole pressure (BHP) and flow rate:</b></p>		
3.1	<p>The authors work with a fixed flow rate, which for the low and medium permeability scenarios results in impossible bottomhole pressures well above the lithostatic stress.</p>	<p>The reviewer is correct that the pressures for the low permeability scenarios are extremely high or even impossible. However, since we chose for our numerical sensitivity study to investigate the impact of a range of parameters and parameter values (<b>point 1.1</b>), it is inevitable that some of the combinations represent unrealistic scenarios. These results are nevertheless part of our study and as such help to draw the picture and to understand the effect of the investigated parameters within geothermal reservoirs. Without them, some of the effects would not have been identified by us. In consequence we are convinced that they constitute an integral part and should not be rejected. We hope the reviewer can agree with this and is also referred to our answer to <b>point 3.6</b>. We also wish to note that in case of the medium permeability model, the high pressure could be easily corrected in the model by changing i.e. the depth of the well or the reservoir, or the borehole diameter (see line 334-339 of our manuscript).</p>	<p>Changes made in lines 159-164 and 229-235.</p>
3.2	<p>Nevertheless, this is only mentioned briefly at the end of the manuscript. Here the authors also state that in these cases "the BHG is outperformed by the artificial flow field</p>	<p>We agree with the reviewer: we will add in the method section that artificial flow field and BHG interact. That some of the models return unrealistic BHP, i.e. represent unrealistic scenarios, will be mentioned in the introduction and the method sections.</p>	<p>Changes made in lines 159-164 and 229-235.</p>

	caused by the very high bottomhole pressure". This has to be mentioned directly in the "Methods" section. The actual value of the low and medium permeability models has to be questioned.	Please see also our reply to your <b>point 3.1</b> . Regarding the medium permeability values, please see line 334 - 339 (discussion paper).	
<b>3.3</b>	The BHG appears to be one of the main drivers, but it is completely overruled by the impossible BHPs in the low and possibly also medium perm-scenarios. In that way, only the low and medium perm model without BHG (0 mm/m) might have some value since the shape of the HDI should not be impacted in that scenario (or is it?).	The value of these models is that they show that if the artificial flow-field introduced by the bottomhole pressure is stronger than the BHG, the importance of the BHG ceases (Fig. 2a, b). Even though, these models represent unrealistic cases in terms of the bottomhole pressure. To show the same effect in a model suite with higher permeability we would need a BHG far smaller than used in our study. Another example is that the impact of layering on thermal breakthrough times, is less well observable in the high permeability models (because the bottom hole pressure is too low in these cases to investigate the effect; please compare Figure 4a with Figure 4g) and can only clearly seen in the unrealistic low permeability models. We think therefore that these (unrealistic) parameter combinations are an integral part of the study and should not be omitted.	Changes made in lines 82-84.
<b>3.4</b>	In addition, wouldn't the induced BHPs also impact the flow velocity in the reservoir and therefore also thermal breakthrough (I am not certain here, but at least mention and discuss)?	Flow velocities are limited by how much water is injected and produced from the system, and are therefore not a function of the BHP's. The main effect of the BHP can be seen in its interaction with the background hydraulic gradient. We agree with the reviewer and will now mention this point in the revised manuscript.	Changes made in line 159-164..
<b>3.5</b>	As a consequence, I would recommend to exclude all other low and medium perm scenarios with a BHG > 0 mm/m. Otherwise please discuss accordingly and inform the reader in the "Methods" section about a) the unrealistic BHPs, b) their impact and c) why the models might still have some value.	These models are an integral part of our study. Please see our answer to <b>points 1.1, 3.1, and 3.3</b> .	Changes made in lines 78-86, 159-164, and 233-235.
<b>3.6</b>	Alternatively, the models could be rerun for different flow rates (e.g. with a fixed draw-down pressure, which is a much better technical parameter to be controlled and	Firstly, if we had chosen a fixed draw-down-pressure, we would have had to deal, at least in part, with extremely low or high flow rates, i.e., the amount of injected cold water would change. Consequently, we would not be able to analyse the interaction and impact of the tested petrophysical and structural parameters, which is the main focus of our manuscript.	Changes made in lines 159-164.

	more or less independent of the geology/petrophysics).	Secondly, for making a large series of models that can be compared to each other and in which the effects of individual parameters can be isolated, the option would be to either to use a fixed bottom hole pressure, which will induce unrealistic flow rates in some models, or fixed flow rate, which will result in unrealistic pressures. The choice for fixed flow rate is because this has the least disturbing effect on the model results because the amount of injected cold fluid stays the same. With other words, to rerun some of the models with fixed draw-down pressure would not correspond to the setup of our study, rather it would alter the results of these particular models and therefore destroy comparability. Please see also our answer to your comment <b>3.1 and 3.3</b> above, where we answer similar questions.	
--	--	---	--

### Specific comments R1:

<b>4.</b>	<b>Abstract</b>		
<b>4.1</b>	Well written, please consider to avoid usage of acronyms (BHG and HDI).	Here we follow the standards of the Journal that require the introduction of acronyms in the abstract.	No changes made.
<b>5.</b>	<b>Introduction:</b>		
<b>5.1</b>	Line 33: Maybe better say hydrothermal than deep geothermal (petrothermal/HDR is also deep geothermal, but only produces from fractures).	We follow the advice of the reviewer and replace “deep geothermal” with “hydrothermal”.	Changed in line 36.
<b>6.</b>	<b>Methods</b>		
<b>6.1</b>	Very minor, but almost all sentences start with “We...”	We agree and we will reformulate this part.	Changed in line 88-101.
	<b>Geometry of the model:</b>		.
<b>6.2</b>	The horizontal extent of the model seems to be rather small (only 4 km), while the vertical extent is very high (2.3 km). It is not clear if this extent only represents the reservoir or also overburden and footwall sediments. Please specify.	We think that the best way to approach this issue is: that in our sensitivity study, the whole model domain should be seen as a potential reservoir volume, i.e. our study investigates which parameters control and or influence the volume that actually can be utilized as a reservoir. We will improve the text accordingly to avoid potential misunderstandings. For your comment on the lateral extent, please see our answer to your comment on line 105 below ( <b>see also point 6.5</b> ).	Changes made in lines 126-127 and 150-153..

6.3	<u>Line 91</u> : The rescaling of the well diameter and “length” is confusing. Please explain in more detail, how and why the rescaling has been done and what is meant by “length” and “active part” (perforated production zone?).	We will follow the suggestion of the reviewer and rewrite this part accordingly. Standard well diameters are a few decimetres. This in turn would need a very fine mesh. To avoid this issue we used a larger diameter for the wells. To account for the unrealistic high diameter and thus the area of the “perforated production and injection zone” we choose to adjust the area via its length to a size that is in a realistic range.	Changes made in lines 129-132.
	<b><u>Temperature:</u></b>		.
6.4	<u>Line 97</u> : The gradient’s unit is wrong (should be 0.047 degC/m not per km). Also, please briefly explain why the respective gradient and surface temperature have been chosen. Especially, since the gradient is very high and the surface temperature is very low.	Thanks for identifying this mistake. We corrected the typo 0.047°C/m. Since we carried out a non-site specific numerical sensitivity study, we chose a realistic gradient that allows for electricity production at this depth. The surface temperature was chosen arbitrarily to be 0°C. This is in our opinion neither particularly high nor low, especially when considering that our numerical sensitivity study is not site specific. Nethertheless, the effect on the model results can be neglected, since a slightly increased surface temperature would alter not the temperature at target depth or the model results significantly.	Changes made in lines 84-86 141, and 142-144.
6.5	<u>Line 105</u> : This explanation of the model size should be move to the geometry section (2.2). The explanation itself is not really convincing: the model probably could have been extended to 10x10 km without significantly more cells, since no high resolution is required at the boundaries and far away from the wells. Please at least mention/discuss possible effects here and in the discussion section.	In Line 103-104 of our manuscript, we describe that the temperature boundary conditions do not affect the model results, i.e. the size of the model domain does not affect the model results. The sentence in line 105-106 is thus obsolete. We will delete the last sentence. This solution also makes merging the description of the model geometry unnecessary. The only limitation by the comparatively small model domain is that we cannot examine in all cases the complete geometry of the HDI (hundred degree isotherm).	Changes made in lines 150-153.
	<b><u>Fluid flow:</u></b>		
6.60	Please explain the setups of the various background hydraulic gradients here or later (see next comment).	Please see our answer to <b>point 6.7</b> .	Changes made in lines 156-157.
6.7	Also please explain how the variation is implemented. Figure 1b is not doing a good job explaining the variation. Is the BHG varying from the center towards a certain	The BHGs are valid for the whole model domain, i.e. the BHG is not varied in the individual models, but interacts with the artificially introduced flow field. The BHG is applied as a pressure gradient on the model boundaries. We will explore this in more detail and improve Figure 1b. Please see also our answer to <b>point 1.2</b> .	Changed Figure 1b. Changed lines 60-66 and 150-157.

	direction? Or from one “edge” of the model domain to the opposite one? Is the BHG a differential gradient in the reservoir or the entire cube? Since this seems to be such an important parameter, please try to be as precise as possible. Also, please provide some geological scenarios that justify the chosen variations in hydraulic gradient.		
	<b><u>Scenarios:</u></b>		.
<b>6.8</b>	<u>Line 127:</u> At 2-3 km burial depth, a matrix permeability of 10-11 mD (10 Darcy) seems a bit high and probably impossible, when combined with 3% or 14% porosity. Please discuss or at least think about removing the high-perm-low-poro scenarios (or give an adequate geological scenario). In general, please consider giving some real world analogs/examples for the chosen poro-perm scenarios. The sandstone reservoir literature should be full of good examples.	We improve the method section to clarify this misunderstanding and add that the permeability values are not linked, respectively provided/controlled by the matrix porosity. We used instead a continuum approach (Berkowitz et al., 1988; Lege et al., 1996; Kolditz, 1997), that uses a replacement media for the fractures and which provides mean hydraulic properties of a given fracture system. This is in our opinion a justified assumption, since permeability is in consolidated sediments often to large parts provided by fractures (Bear, 1993; De Marsily, 1986; Hestir and Long, 1990; Nelson, 1985). Please see also our answer to <b>point 1.1.</b>	Changes made in lines 67-70, 78-86, and 176-182.
<b>6.9</b>	<u>Line 145-146:</u> It would be nice to have some real-world justification for the chosen fault permeabilities. There is a lot of literature available.	We accept the suggestions of the reviewer and justify the chosen parameter values in the introduction. Please see also our answer to <b>point 1.1.</b>	Changes made in lines 52-56.
<b>6.10</b>	<u>Lines 149/150:</u> Please provide some geological scenarios that justify the chosen variations in hydraulic gradient.	We follow the reviewer’s suggestion and explore the topic in more depth in the introduction. Please, see our comment above to <b>point 1.2.</b>	Changes made in line 60-66. .
<b>7.</b>	<b><u>Results:</u></b>		
<b>7.1</b>	<u>Line 165/166:</u> According to figures 2e & 2f, this is only true if the BHG is applied in the direction of the injection well (fig. 2f).	The reviewer is correct. Here we provide/describe the ranges of reservoir lifetimes observed in scenario 1, for different reservoir permeabilities. These ranges depend naturally also on the other parameters varied in our multi parameter sensitivity study. This is why we choose to	No changes made

		present our results in different plots, e.g. lifetime vs, permeability, and lifetime vs direction of the hydraulic gradient.	
7.2	<u>Line 180</u> : This makes sense, but how realistic is it to have a rock/sediment with a permeability of 10-11 m <sup>2</sup> and a porosity of only 5% or 14%?	Please see our answer to your comments to Line 127 ( <b>point 6.8</b> ).	Changes made in in lines, 67-86, and 176-182.
7.3	<u>Line 236</u> : Why is the stabilization at 100°C?	In our study, we investigate the effect of multiple parameters; there are certain combination that can produce similar results, in this case the convergence to 100°C in Figure 2j, 6g, 7g, 8d, 8g, 9g. To analyse this in more depth, would require a different sensitivity study with a different setup. We will also modify the sentence to: “In the presented model runs as shown in Figure 4, temperatures stabilize at a final temperature of about 100°C.”	Changes made in line 318.
7.4	<u>Line 237</u> : Wouldn't you expect a significant effect of convective flow in a vertical fracture?	We assume that this question is likely caused by the fact that we were not clear enough about how permeability is implemented. See also our answer to <b>point 7.6 and 2.1</b> . We will also rephrase the sentences in line 238-239 (discussion paper) to: “..., compared to the other directions, as common in fractured reservoirs (Figs. 1e, 5).” We did not introduce additional vertical fractures in this scenario, but increase the fracture anisotropy in the given plane. This question would be necessary to answer if we would have used a discrete fracture model. We are convinced that this question will be answered after we improved the method section regarding the implementation of permeability and porosity. Also in natural fracture systems the vertical extent of fractures is commonly restricted, i.e. many fractures stop at sedimentary contacts/layers and thus density-driven heat flow would be hindered in the vertical direction, as the reviewers agrees in <b>point 2.1</b> .	Changes made in lines 176-182, 321, and 534-538.
7.5	<u>Line 253-254</u> : Please rephrase or put more detail. What do you mean by: “a closed geothermal loop may not be feasible”?	We agree with the reviewer and rephrase the sentence to “.....the establishment of a closed geothermal system becomes unlikely.”	Changes made in line 338-339.
7.6	<u>Line 258</u> : Not sure what we can really learn from this part, since many real-world projects have shown the significant impact of convection on the temperature field of fault-controlled reservoirs (e.g. Soultz-sous-Forets).	We discuss this limitation now. The main point will be: Whereas our models likely underestimate the lifetime of fault-related reservoirs that allow for convection, they allow for improved estimate of how strong the effect of convection should be to counteract the negative influence of the channelling effect. Thus, it shows the importance to know the budgets of both the channeling effect and the effect of density driven convection to make assumptions about their effect on the potential lifetime of a geothermal reservoir.	Changes made in lines 534-538.

		Please see also our answer to <b>point 2.1</b> and to the lines 363-368 of our manuscript, where we refer to a real world example of this observation.	
7.7	<u>Line 258f</u> : What is the permeability of the matrix (host rock)?	See line 141f (Discussion paper). We agree with the reviewer and now repeat the value of the bulk permeability of the host rock in this section to improve readability. Please note our answer to point 6.8 in which we clarify how permeability is implemented.	Changes made in line 347-348.
7.8	<u>Line 291</u> : "...BHG, does the temperature stays..."	We thank the reviewer and will correct the sentence.	Changes made in line 376.
8.	<b>Discussion:</b>		.
8.1	<u>Line 313-328</u> : Maybe this part would be much better placed in the introduction and in some parts in the "Scenarios"-part (see previous comments on mentioning analogs etc).	Our study is a non-site-specific sensitivity study (with simplified models). We use this part as an introduction in the discussion section to show how parameters such as porosity and permeability can be highly variable. We discuss that even comparatively small variations of these parameters have a strong effect on a reservoir's performance. Thus, we think that the structure of the manuscript, as it is, is justified. We are aware, however, that it would be possible to tell the story in a different way. However, now we will discuss in more detail the implication of figure 10 for our study and geothermal energy in general. Further, we will better explain in the Introduction the aim of our study. This will also include a point regards the variability of geological systems. See also our answer to <b>point 1.1</b> .	Changes made in lines 67-86.
8.2	<u>Line 335</u> : How does the bottomhole pressure impact the influence of the BHG? In particular in the low-permeability case? Please mention earlier (e.g. in the Methods or Scenarios section(s)).	The influence of the bottomhole pressure on the BHG depends on the ratio between both. If the bottomhole pressure is higher than the BHG it dominates and vice versa. The low permeable cases are due to high bottomhole pressures unrealistic, but allow to investigate the effect of other parameters like permeability contrasts. In our opinion, these points are preferably placed in the discussion section. We, however, will state that some of the scenarios are unrealistic and that both fluid systems interact and we will specify that point in the method and discussion section. Please see also our answer to <b>point 3.3</b> .	Changes made in lines 159-164 and 228-235.
8.3	<u>Line 335f</u> : Here is the answer of the last comment: "the BHG is outperformed by the artificial flow field caused by the very high bottomhole pressure". Actually, the bottomhole pressures in the medium and low permeability cases are impossible in	We agree with the reviewer please see above. The low permeability/ high fluid pressure models underestimate the effects of the background hydraulic gradient. The importance of the findings of the low and medium permeability models as well as the use of the constant production and injection rates are justified above in <b>points 3.1, 3.3, 3.6</b> . We hope that answers the questions raised by the reviewer.	Changes made in lines 159-164 and 228-235.



	nature. The question is then, what is the meaning of the modelling results? An elegant way to avoid this problem would be to work with a constant draw-down instead.		
8.4	<u>Line 361</u> : Please consider providing some geological scenarios for variations in BHG.	We assume that this is a misunderstanding. We have not introduced variations of the BGH within one individual model, but we assigned different BHG to individual models. We improved the method section to clarify this issue. Please see our comments to <b>points 1.2 and 6.7</b> . We also, as requested, provide improved introduction regarding the BHG.	Changes made in line 58-66 and 156-157.
8.5	<u>Line 379f</u> : “Notably, in the low and intermediate permeable models, where permeability contrasts are higher than 1 order of magnitude, none of the tested BHG configurations could compensate for the small volume”. Or is this again related to the unnaturally high BHPs in the low and medium permeability scenarios? Please discuss.	We agree with the reviewer, and add that the unrealistic high bottomhole pressures do not allow the BHG to affect the system. We also correct the typo “higher than 1 order of magnitude” to “higher than 2 orders of magnitude”	Changes made in line 467.
8.6	<u>Line 387</u> : instead of “borecore”: core from boreholes.	We thank the reviewer and we will correct the sentence accordingly.	Changes made in lines 475.

## General Comments RC2:

	Figures:		
1.1	Figures in general have a small scale for (small) colored dots and a (uselessly) large scale for the vertical. Furthermore, the colors used are the same. This is misleading the reader. My suggestion is to use different color codes for the two parameters (depth and BHG) and change the relative dimensions of the two scales, since the focus of the manuscript is on the BHG (color-coded dots).	We follow the reviewer's suggestions and will adjust the size of the legend for the HDI plots. Further, we'll try to find a different colour scale for the HDI.	We modified the figures as suggested.
1.2	Figs.2a-c (as well as other corresponding plots) either have inverted y-axis scale (sic!), or I did not understand the figure and/or the text (cfr. lines 161-165). This produced some initial misunderstanding of the work (the text is not properly describing what is presented in the figure).	The y-scales of each scatter plot show the time to thermal breakthrough, i.e., the time at which the production temperature reaches 100°C. There are no depth scales in the scatter plots. There are no inverted scales in any of the figures of our manuscript. We assume, as the reviewer pointed out in <b>1.1</b> , that this misunderstanding is caused by the fact that the colours for the scatter plots overlap in parts with the colour code used for the figures showing the HDIs. We will try to find a different colour scale for the figures that present the shape of the HDIs. We are aware that the presentation of the results, owed to the multiple parameters we analysed, is somewhat unconventional. We will follow the suggestion to provide a short introduction/explanation on how to read the figures in the Method section (see also point <b>1.5, 1.6, and 2.8</b> ).	Changes made in lines 220-226.
1.3	In many experiments the temperature stabilizes at around 100_C (Figs. 2j, 6g, 7g, 8d, 8g, 9g). The reason for this coincidence with the HDI not clear or explained. The author should justify this "convergence" in the various models.	The question why in some of our models the temperature converges to 100°C was also raised by reviewer 1 ( <b>RC1s point 7.3</b> ). The answer is that in these cases it is a coincidence and the result of a complex interplay between the chosen parameters, i.e. thermal gradient, surface temperature, porosity, permeability.	No changes made.

1.4	In Fig.1a the projection of the wells provides the impression that their trajectory is oblique. The Author should either correct the figure or describe the reason for oblique wells as well as quantify it.	The wells are indeed oblique. We will include the parameters in the method section. The reason for the inclined wells is that it allows us to keep the whole well within the damage zone of the fault in Scenario 5, which is also oblique, i.e. it dips. For comparability, we used the inclined wells consequently in all the other models.	Changes made in lines 134-136.
1.5	In the Figures the Authors should include the number of experiments represented (i.e. the number of dots in the single figure).	The reviewer is correct: The number provided in the figure captions could be misinterpreted. Indeed each of the corresponding plots contains the same results, i.e. the same number of dots. The difference is that in the different plots the same results are presented with different x-axis to explore the impact of the multiple parameters. We will clarify this issue as promised above ( <b>point 1.2</b> ) using a short introduction in the figure setup in the method section. We will also correct the figure captions, from e.g.: “Plots (a), (b), and (c) contain the results of 225 simulations.” to “Plots (a), (b), and (c) each contain the results of the same 225 simulations.” We think this is less confusing than presenting in each sub figure the same number of experiments. We hope the reviewer agrees with this option.	Changed figure captions for clarification (Figs. 2, 4, 5)
1.6	The author should discuss the case of a strong variation in the results (e.g. Fig. 1a, red dots for BHG=20 mm/m, at permeability 10-11).	We are convinced that the influence of the BHG is sufficiently discussed in the lines 351 to 368 (SED), where we describe that, at high permeabilities, the BHG can outperform the artificially-introduced flow field. We are convinced that the reviewer’s question becomes obsolete with the new improved method section that introduces the setup of the scatter plots, i.e. that the scatter plots presented next to each other must be seen in combination and not as stand-alone results.  In this particular example cited by the reviewer, the corresponding Figures 2a, b, and c should read as follows. The thermal breakthroughs of less than 20 years, is according Figure 2a, at permeabilities of $10^{-11}$ m <sup>2</sup> . The same data points in Figure 2b (red dots with lowest thermal breakthrough times) show that this short time to thermal breakthrough is observed for hydraulic s that are directed southwards and have a magnitude (colour code red, as shown in the legend) of 20 mm m <sup>-1</sup> . In Figure 2c, the same data points are plotted according to the porosities used in the models. Here, it shows that, in this case, porosity plays a minor role in determining the expected lifetime of the reservoir.	Included lines 220-226.

		We additionally visualized this connection using horizontal lines that connect results of the same experiments.	
1.7	Numbers are very small to pretend some statistics (mean, sd), but they could mean unreliable results and should be discussed.	We agree that a further statistical evaluation is futile. We also think that providing parameters like mean and standard deviation might not be the way to further investigate our results, because the present results are from different experiments with varied model parameters. This means, our experiments do not allow such statistics.	No changes made.
1.8	The “line connecting the same experiment” is not clear. In Fig. 2 the yellow line connect one yellow dot per figure, and it is easily understood. On the other hand, in other figures (e.g. Fig. 4a-b, green lines) the do connect multiple dots in the same figure. This is confusing: how many numerical experiments were responsible for each dot in each figure (I assumed one)? Maybe they partially overlap.	The reviewer is correct. Each dot in each panel is the result of one numerical experiment, and each of the according panels contains the same model results. Due to the large number of experiments, we unfortunately cannot avoid that, in some cases, the line connecting the dots, which belong to same experiment, also cross other points. In this case (Figure 4a, b), it shows that the varied parameters (direction and magnitude of the BHG) does not influence the time to thermal breakthrough in the modelled time span. Consequently, the dominating parameter that determines the reservoir’s lifetime in the low permeability series is the permeability contrast. Please see also lines 370f and 204f of the discussion paper. Please see also our answer to <b>point 1.6 and 2.8.</b>	Included lines 220-226.

### Specific comments R2:

2.1	In <b>lines 34-39</b> the Authors discuss the poor improvement in porosity due to the presence of fractures. This is true, but the author are not considering the main role provided by fractures in improving the effective porosity by connecting isolated pores, as is normally achieved in tight-gas reservoirs (gas-shale). In general, the manuscript is not discussing on the difference between total porosity and effective porosity. I guess that the porosity they consider in the numerical experiment is merely the effective one, and this should be	The second part of this question address how permeability is implemented in the models. The same issue was raised by reviewer 1 ( <b>e.g. point 6.8</b> ), it will be answered in the method section and we will clarify that the permeability in the models is not linked to matrix porosity. Instead we use the continuum approach (Berkowitz et al., 1988; Lege et al., 1996; Kolditz, 1997), in which replacement media is used to model fractures and provides mean hydraulic properties of a given fracture system.	Changes made in lines 42-45 and 176-182.
-----	--	---	--

	clearly mentioned. On the other hand, a brief note on the role of influence of fractures on effective porosity is required to complete the introduction and the discussion paragraphs.		
<b>2.2</b>	Equations in <b>Line 72, 81, 82</b> seem correct, yet references for the general audience (as Solid Earth also has) are required.	We will follow the reviewer's request and will provide additional literature.	Included in lines 113 and 115.
<b>2.3</b>	<b>Line 91-92.</b> The limit to 20m is not easy to be understood (e.g. where these 20m were located along the well). Maybe a better way to express this correction would be to express it as a percentage of the well hole surface (the cylinder), or by presenting the equivalent reduction in permeability between the well cell and the surrounding ones in the mesh.	We thank the reviewer. A similar question was raised by reviewer 1 (point 6.3). We will follow the suggestion of the reviewers and rewrite this part accordingly. Standard well diameters are a few decimetres. This in turn would need a very fine mesh. To avoid this issue we use a larger diameter for the wells. To account for the unrealistic high diameter and thus the area of the "perforated production and injection zone" we choose to adjust the size of the area via its length to a size that is in a realistic range.	Corrections made in lines 130-132.
<b>2.4</b>	<b>Line 96:</b> I guess that the geothermal gradient is in reality expressed by m and not by km...	We thank the reviewer and correct the typo.	Changes made in line 141
<b>2.5</b>	<b>Line 105 and 113.</b> I guess that "computational costs" really intends the more appropriate expression "computational time". It would be of interest to the readers to quantitatively justify this sentence: add in lines 69-71 information on the used computer platform and the approximated run-time for a single numerical experiment. <b>Line 126</b> and through all the experiments.	We will now provide information on the computer platform and the differences in the runtime for the fully- and unidirectional coupled experiments.	Changes made in lines 168-169.
<b>2.6</b>	My opinion is that a permeability of $10 \times 10^{-11} \text{ m}^2$ is unfair to be reached in a reservoir at the used resolution of the model, with the exception of karst cavities. The Author might include here a descriptive	Both of the here addressed issues are also made by reviewer 1. The first point regarding the high permeabilities is answered by how permeability and porosity are implemented in the models. We are now aware that we were not clear enough about this and will now address this issue in the method section to avoid potential misunderstanding.	Changes made in lines 67-86 and 176-182.

	correspondence to the reservoir permeability (e.g. tight reservoir for 10 exponential -15 m2, medium-high permeable reservoir 10 exponential -13 m2, karst structures 10exponential-15 m2).	Please see our answer to your <b>point 2.1</b> and to e.g. <b>point 6.8</b> by reviewer 1. This second question, which also ties directly in with a request of reviewer 1, is to provide some real world examples. We will improve the Introduction and try to find the best compromise between both suggestions.	
<b>2.7</b>	<b>Lines 143-147</b> more references on measure of permeability in fault core are important here (e.g. works by R.J Knipe and/or Q.J Fisher).	We will provide more literature on fault permeability, as also requested by reviewer 1 ( <b>point 6.9</b> ). We, however, prefer to present them in the introduction instead of placing them in the results. We hope the reviewer finds this compromise acceptable.	Changes made in line 52-56.
<b>2.8</b>	Line 161-165. As mentioned, the only way I found to correlate text and Fig2a-c is to invert the Y-axis scale. Anyhow the description, even with this correction, does not correlate for 10exponential-11 permeability experiments, that scatter results all along the entire span 0->200 a apparently without any rule (e.g. red dots). Did I understand properly the figure? If not, a more careful introduction to the figure and description might be necessary.	Please see our answer to your <b>points 1.2 and 1.6</b> . We will provide an introduction on how the plots are to read. In detail, on the example of figure 2a-c. Each of the plots a), b), and c) contains the same model results for all combinations of the three porosities, the three permeabilities, the eight directions of the hydraulic gradient and of the 4 different magnitudes of the BHGs. As the reviewer agrees, these are a lot of parameters to visualize. Whereas this is a typical approach to plot results in multi parameter studies, it is not very common in the geosciences. We decided to keep the y-axis constant, which shows the time to thermal breakthrough. The x-axis was used to plot the same data points in different ways, to produce the patterns that show the different effects of the different values (permeability, direction of the hydraulic background gradient, porosity). In consequence, it is important to see these plots as a whole, i.e. the value they provide only becomes apparent by looking at them in combination. The connecting line is used to show the above issue and connects the same result of one experiment and allows to identify the parameter values for each individual model run.	Included lines 220-226.
<b>2.9</b>	In the Figs. the meaning of the represented surface is not completely described. The Authors refer to "HDI shape". I am not sure but I guess that, considering the experiments, these surfaces represent the envelope of the volume where the temperatures become lower than the HDI due to the successful heath extraction. An explanation on the meaning of the HDI shape	We accept this point and will improve the description of what the HDI actually is. The reviewer is correct with the description. The HDI encloses the volume with temperatures lower than 100°C.	Changes made in line 150-152.

	is required in the text (and maybe in the caption for the fast readers...).		
<b>2.10</b>	<b>Line 173-174</b> the probability concept should be better introduced.	We accept the suggestion and will describe in more detail that elongated ellipsoidal HDIs, where their direction is controlled by the HBG, may result in a reduced probability/chance that the injected cold fluid reaches the production well.	Changes were made to lines 252-253.
<b>2.11</b>	<b>Line 178:</b> I guess the Authors intend Fig.2g and not 2e.	We thank the reviewer to point out this mistake. We will also rephrase the according lines for better readability: ...”The two contrasting BHGs in Fig. 2g show, either fast (e), or almost no decrease (f) in production temperature” .....	Changes made in line 259.
<b>2.12</b>	<b>Line 198</b> “three series”. This is not clear: I see in the figure 3 different permeability (these are the three series), 4 permeability contrasts and 8 different orientation for BHG with 4 possible gradients, for total of $3 \times 4 \times 8 \times 4 = 384$ combinations. Then just three BHG shapes, but for the same permeability (same series). This might be confusing. A more complete description of the model procedure might help to understand the results.	We will improve the text. In detail in line 203 (discussion paper) we will directly refer to the according figures and model series when introducing the permeabilities. We will also mark in the figures the series to which they belong.  With regard to figures 4c, f, and i, we selected exemplarily three HDI shapes from the medium permeability models. Given the 300 individual model runs presented in this scenario, we decided to show these because they constitute a good compromise, i.e. they (1) are in a realistic permeability range and (2) clearly show the effect of the permeability contrasts.	We improved Figure 4 and changes made in lines 192-194, 281-284, and 825-830.
<b>2.13</b>	<b>Fig 4b</b> is not clear, and in general figs 2, 4, 5 are not easy figures. Same color dots appear both on high and very low times to breakthrough. This could mean the excessive scattering of results, or that results are from experiments with different, not specified, parameters.	Regarding the Figures in general, please see our answer to your <b>points 1.6, and 2.8</b> . Regarding Figure 4b in particular please see our comment on your <b>point 1.8</b> . Figure 4b shows, in combination with Figure 4a, that the only controlling factor in this low permeability case is the permeability contrast in the reservoir, i.e. the orientation and magnitude of the BHG is of no importance. This correlation however is altered (Figure 4d, e and Figure 4 g, h), if the permeability of the reservoir layers increases, i.e. the BHG can, in these cases, compensate the limitations introduced by the permeability contrast. Please see lines 376f and results <b>3.2 Models of layered reservoirs in the discussion paper</b> . We assure the reviewer that all parameters are specified and can be picked in the figures as described in e.g. <b>point 2.8</b> .	We improved the figures and included lines 220-226.
<b>2.14</b>	I think to have properly understood the relations between the dots in Fig. 4a, b and	We assure the reviewer that we have discussed and tested many options to present the data, including the ones made by the reviewer, i.e., using different symbols and/or adding references.	We improved the figures and

	<p>the reason for the limited connection presented in Figs. At the present stage, the figure is very difficult to be understood (also due to the high number of combinations in the experiments – i.e- the number of parameters used - and the limiting 2D of the journal pages...).</p> <p>The Author could try to improve the correlations by either using different symbols for each experiment (good luck, it would be a big effort with questionable results) or by adding a reference number to each dot.</p> <p>The diagrams have a relative small number of dots and a lot of empty space. A simpler alternative might be to add in the text the clear description of a correlation among dots as an example.</p> <p>There are also some evident overlap of dots (just comparing among figures) and this should be described (or slightly move one of the dots within the resolution of the results).</p>	<p>It, however, did not improve the figures, as expected by the reviewer. We found that the way we finally chose, as is common in multi-parameter studies, is probably the best. However, we will provide an additional section in the methods that helps to understand the concept of the figures. See also our answer to your <b>points 1.6, 1.8, 2.8, 2.13</b> above.</p>	<p>included lines 220-226.</p>
<b>2.15</b>	<p><b>Line 215-220</b> again: the cited 70 years seems to correspond to 130 years in Fig.4d, second column. Is there again reversed the Y-axis scale?</p>	<p>Here we are writing about the range of observed lifetimes. The range of observed lifetimes, in this case, is indeed about 70 years, i.e. between 130 and 200 years.</p>	<p>No changes made.</p>
<b>2.16</b>	<p><b>Line 235.</b> As previously mentioned. Why at 100_C? This should be justified by the Authors.</p>	<p>Please see our answer to your <b>point 1.3.</b></p>	<p>No changes made.</p>
<b>2.17</b>	<p><b>Fig.5</b> the origin of dots on top of the plots a-c (i.e. at &gt;200a) is not clear.</p>	<p>In this, as in many other model runs, the production temperature did not fall below the 100°C threshold. In consequence, we decided to assign the results of expected lifetimes to be at least 200 years, i.e. the time modelled.</p>	<p>Changes made in line 217-218.</p>



		On the example of Figure 5. This the only model configuration that allowed a hydraulic connection between the wells because the fracture anisotropy is parallel to the well alignment. In the other cases, the fracture anisotropy, even the lowest, hinders the reinjected cold fluid reaching the production well, and consequently, under the applied model setup, the temperature stays above the threshold.	
<b>2.18</b>	<b>Line 264-265</b> Fig. 5g shows that temperatures stabilize at 100_C. How this happens at exactly the critical temperature chosen for the HDI? Is this input in the model? Some explanation is needed.	Please see our answer to your <b>point 1.3</b> .	No changes made.
<b>2.19</b>	<b>Lines 340-349</b> Here is perhaps the proper space to discuss the total porosity and the effective one I discussed above. As I understand, the chosen porosity is intended to be 100% effective. A sentence explaining this should be anyhow added to the article.	Please see also our answer to <b>point 6.8</b> from reviewer 1 and your <b>point 2.1</b> .	No changes made, see method in line 179-180.
<b>2.20</b>	<b>Line 371.</b> This assumption may be too forced, and I am sorry for the referenced articles. Secondary fractures and faulting allow permeability to take over thinner clay layers that lose their sealing property. This is more difficult in thicker clay layers. I understand that in the useful proposed model are necessary simplifications, but it is not the case for the complexity of real geothermal reservoirs.	<p>We acknowledge that the reviewer agrees that this is an unfortunate but necessary restriction of the models. This is however, the concept of our study, i.e. to use simplified models and to show that, even with these simplifications, predictability of the modelled systems is extremely complex. This agrees also with the reviewer's <b>point 2.27</b> that our manuscript presents a first step in pointing out these difficulties.</p> <p>We agree, of course, with the reviewer that fractures also propagate through "sealing" layers. Even though such softer layers hinder fracture propagation. For this reason we wrote, "restrict fluid flow across them" to avoid a too strong statement.</p> <p>We will additionally rephrase the sentence in line 371 (discussion paper) to:  "(Sub)horizontal permeability contrasts can be caused by layering in sedimentary rocks and can span several orders of magnitude (Zhang, 2013), even though these sealing properties are altered or reduced by barren fractures."  We hope this is an acceptable compromise.</p>	Changes made in lines 458 and 461.
<b>2.21</b>	<b>Line 399.</b> I do not see evidence in Fig. 5b to justify this sentence. At my sight, the resulting timings are fully independent from	<p>The reviewer is correct. Indeed, we refer here to Figure 5a, b, and c. With this correction, the statement in line 399 is justified.</p> <p>The sentence in Line 399-400 will be rephrased to:</p>	Changes made in lines 488-489.

	the BHG values (colored dots). May be the Authors are referring here on the BHG orientation of Fig.5c.	“Second, fracture anisotropy in the range of 1 order of magnitude, with respect to the bulk permeability, leads to either very short- or long-lived geothermal reservoirs, depending on the BHG properties and the orientation of fracture anisotropy (Fig. 5a, b, c).”	
<b>2.22</b>	<b>Line 423-414</b> Fractures and secondary faulting associated to faults have generally various angles to the faults and only a minority lies parallel to it (cfr. Riedel). This results in: fracture intersections, fracture opening by the stress induced from the kinematics along the fault (friction). These factors guarantee the higher permeability of fault damage zone to a certain extent, as described in the literature. To be explicit: “often-observed” of “fault-parallel fracture anisotropy” does not correspond to either field outcrops and cores across fault zones, apart from S-C structures, where in any case C planes are generally subordered in number to S ones, My suggestion is simply to eliminate the “often-observed” attribute.	<p>We accept the reviewer’s comment that our statement is eventually too strong. However, following the suggestion to delete “often-observed” makes the statement much stronger. We will modify the sentence to:</p> <p>“This typical characteristic of fault zones thus increases the chance of good hydraulic connection between injection- and production wells and is potentially further improved by fracture anisotropy in the damage zone, which is often (sub)parallel to the fault.”</p>	Corrections made in lines 504-505
<b>2.23</b>	<b>Line 429</b> The previous concept is repeated here: useless redundancy and same comment.	<p>We do not fully agree with the reviewer. In the lines 411 to 425, we discuss why faults have become recently prime targets in geothermics and the difficulties that have been reported. In lines 425 to 440, we discuss the results of our models and how they agree or disagree with common knowledge.</p> <p>We will slightly modify the sentence in line <u>425-426</u> to:</p> <p>“Our simplified models support these findings and show that faults, with damage zones that constitute positive permeability contrasts of just 2 orders of magnitude, exhibit these channelling effects (Fig. 6).”</p> <p>to make the structure of this section clearer.</p>	Changes made in line 516.
<b>2.24</b>	<b>Line434-435</b> the use of the terms “opposed/opposite” to indicate opposite (!)	We accept the reviewer’s suggestion and will rephrase the sentence accordingly to:	Changes made in lines 526-528.

	dipping is misleading. A rephrase would solve it.	“We observed that, when the BHG is oriented against the dip direction of a fault, the fault can be considered a more sustainable target for geothermal exploitation than a fault with a BHG oriented in dip direction (Figs. 7e, f, 8e, f).”	
<b>2.25</b>	<b>Lines 62, 442:</b> they were 1027 (from line 150). This is an interesting and serious number of runs and it would be effective to remark this number both in the introduction (say, “over one thousand numerical experiments”) as well in the Conclusions “(1027)”. My impression is that “large series” or “a series of” would be –alas – interpreted as much smaller number in present-day publish-or-perish scientific environment.	We very much appreciate that the reviewer values our work and we will stronger pronounce the number of experiments carried out by us.	Changes made in lines 14-15 94-95 540.
<b>2.26</b>	<b>Line 457:</b> This is not so simple. This sentence does not take in consideration the improvement of the effective porosity that is induced by fracturing that in turn may be enhanced by the oriented stress that develops in presence of strong BHG. Since the point about effective porosity changes is not taken into consideration in the presented models, my suggestion is to specify this in the sentence (referring to “in many cases” might be not sufficient).	<p>The reviewer is correct that effective porosity is, in many cases, improved by fracturing. However, the reviewer accepts also that an investigation of this effect is not part of our experiments. We, here, refer to our model results that show that the positive effect of porosity has on heat capacity and thus on the reservoir lifetime is minor, compared to that of permeability and BHG.</p> <p>We will rephrase the sentence accordingly to “, in many cases, the positive effect of porosity has on heat capacity and thus on the reservoir lifetime, is minor, compared to that of permeability and BHG....”.</p> <p>We hope that the reviewer can accept this solution.</p> <p>Please see also our answer to <b>point 2.1</b>, in which we explain how porosity and permeability are implemented in the models.</p>	Changes made in lines 176-182, and 555-557.
<b>2.27</b>	<b>Line 459-462.</b> On the contrary, results from this work well represent the first step to model real, complex geothermal reservoirs with their Stochastic modelling by adding in the mesh the proper random values! And I am sure that the “computational costs” at	<p>We thank the reviewer for the positive evaluation and welcome the suggestion to extend the conclusions and end the manuscript as proposed with a positive outlook, i.e., how our findings help to improve geothermal exploration in the future.</p> <p>We will include at the end of our manuscript:  “Our results show that realistic site-specific models are difficult to achieve, because parameters, such as permeability structure and BHG, are often poorly constrained but can have</p>	Changes made in line 564-566.

<p>that stage will be an insignificant obstacle. This might be a further point and a better conclusion to your article (follow the Hollywood-movie style: end always your articles with a true, positive sentence on your results...).</p>	<p>unforeseeable large effects on the lifetime of geothermal systems. Thus our findings provide an important step forward to judge which parameters must be known to which degree to make site specific models as reliable and accurate as possible in the future, by implementing the controlling parameters in advanced stochastic models.”</p>	
--	---	--

**General Comments RC3:**

<p><b>1.1</b></p>	<p>Model parameters, including selection of porosity-permeability combinations, length of model duration, selection of 100 C isotherm, are not sufficiently justified, and may not be relevant to operating geothermal fields.</p>	<p>We consider feasible ranges of all parameters, including values below and above typical benchmark parameters. This is prerequisite for a sensitivity study. From the combination of all the results, we determine particular parameters and their values that exert control on the geothermal reservoir. The necessity of this approach was provided and explained by us in our response to R1 point 3.3.</p> <p><b><u>Porosity and Permeability</u></b>  <b>Points 2.16, 2.20, 2.25, 2.32:</b>          In accordance to R1 and R2, we have now improved the introduction and introduce the values for permeability, porosity earlier in the text. We discuss how these compare to typical values in different geothermal settings. We now explain better the modelling approach that we use.</p> <p><b><u>100°C and threshold</u></b>  <b>See also points 2.2, 2.10:</b>          A universally applicable (economic) threshold cannot exist, because of the different site-specific demands of geothermal power plants e.g., district heating, electricity generation, output, depth of the reservoir. The 100°C isotherm or the 100°C threshold must be arbitrary, at least to some degree, even not taking into account that it must somehow balance with the model duration. We chose 100°C because it is sometimes referred to as minimum temperature that allows electricity production with binary cycles (e.g., Bhatia, 2014; Bunes et al., 2010; Erec, 2004; Huenges, 2010; Mergner et al., 2012). We have rephrased the sentence and improved references.</p> <p><b><u>Model duration</u></b>  <b>points 2.9 and 2.18, 2.34:</b>          There are two points to be made here. Firstly, we do not investigate the lifespan of hydrothermal power plants, but rather the role of individual reservoir parameters on the thermal development of geothermal reservoirs (see line 53-54 SED). Secondly, there is a balance between threshold temperature and duration of the model. If, as requested by the reviewer, we had chosen 150°C, then the effect of the parameters on the thermal lifetime, would be less clearly shown. If we, in addition, had only run the models for 40-50 years, then the majority of the model runs would not reach the</p>	<p>Changes made in lines 67-72, 78-86.</p>
-------------------	--	---	--

		<p>important/higher threshold, i.e. there would be no data to show. For instance in scenario 1 (Fig. 2a, b, c) and 2 (Fig.4a, b, d, e, g, h) we could not identify the impact of the different parameters.</p> <p>We strongly disagree that this study is not relevant to operating fields. The model results give an indication of the importance of different hydrogeological parameters on the lifetime of geothermal reservoirs, and even if the modelled lifetime of the reservoir exceeds the lifetime of a geothermal power plant, the relative importance of different parameters remains the same.</p>	
<b>1.2</b>	<p>Use of references and citations is inconsistent. In some cases, statements with long lists of references are too vague to be useful (i.e. not clearly tied to particular geothermal fields or a specific type of inquiry (numerical, field, experimental: :)) and in other cases the listed references do not seem appropriate for citing in their current context.</p>	<p>We feel that there is some room for improvement. However, we disagree that the references are too vague.</p> <p>See our comments to your detailed criticism below.</p>	<p>See points below.</p>
<b>1.3</b>	<p>The structure of the paper fails to emphasize the role of BHG nor does it discuss enough real world scenarios where the impact of BHG, or even suspected impact of BHG, can be shown. As it stands, almost all of the conclusions are about BHG, but BHG only gets 3 lines in the introduction.</p>	<p>We strongly disagree. The results, the discussion section, and the conclusions contain a sufficient information about the BHG; in our opinion, balanced together with the other parameters. The only part that can be improved with regards to the BHG is the introduction. This was our answer to the reviews by R1 and R2.</p> <p>That we cannot discuss the effect of BHG for a large amount of real world scenarios is because of, to our best knowledge, the lack of data and case studies in the literature. BHG has not been considered in equivalent studies in literature before our paper.</p> <p>We appreciate that the reviewer likes our findings regarding the BHG. We will improve the introduction concerning the BHG. We, however, disagree that almost all of the conclusions are about the BHG, all of the conclusion points emphasize the important role of permeability and permeability heterogeneity as well. The BHG - even though you agree that this is an important parameter- is an underestimated parameter. It is, however, still just one of the parameters that we investigated in our manuscript, and its ranking in the modelling, as a whole, needs to be understood.</p>	<p>Changes made in lines 58-66.</p>

**Specific comments R3:**

2.1	<b>Line 11:</b> This sentence neglects economic factors. Rather than “can be exploited” maybe describe geologic factors influencing economic viability, as you do in the introduction.	Our manuscript considers geological reasons for geothermal lifetime. Our manuscript does not focus on economic factors and we have therefore removed any reference to this subject in the introduction.	Changes made in line 30, 93, and 290.
2.2	<b>Line 17:</b> 100°C isotherm is not well justified. See additional comments below.	This is the abstract of our manuscript, we here report solely the threshold we use and are convinced that any justification of the 100°C isotherm at this place would be misplaced. See also point 1.1.	No changes in the abstract. The 100°C isotherm is justified in lines 90-94
2.3	<b>Line 29:</b> The first few lines of this paragraph make it seem like these references pertain to hydrothermal settings specifically. In this current configuration, Laubach et al. (2009) does not seem like an appropriate reference as they do not describe fracture patterns in hydrothermal systems, nor do they explicitly describe the impact of fractures on permeability or volume (other than tangentially) but rather compare fracture and mechanical stratigraphy.	This line introduces the difficulties to predict reservoir properties. This is the case of permeability. Permeability is commonly provided by fractures. In Laubach et al. (2009), they point out that fracture patterns are difficult to predict (and therefore also permeability). Thus, we are convinced that citing Laubach et. al., 2009 here is justified.  For instance, Laubach et al. (2009) wrote: <i>“In subsurface studies, current mechanical stratigraphy is generally measurable, but because of inherent limitations of sampling, fracture stratigraphy is commonly incompletely known. To accurately predict fractures in diagenetically and structurally complex settings, we need to use evidence of loading and mechanical property history as well as current mechanical states.”</i>	No changes made.
2.4	<b>Line 32:</b> Manning and Ingebritsen (1999) concerns theoretical permeability at the crustal scale and in metamorphic rocks in particular. The link between this reference and the statement are again tenuous unless more clearly explained.	Here we write that permeability and porosity in general are rock properties that are highly heterogeneous, independent of rock type.  Manning and Ingebritsen (1999) wrote: <i>“Near the Earth’s surface, permeability exhibits extreme spatial variability (heterogeneity) and anisotropy, both among geologic units and within particular units”.</i> Thus, in our opinion, the reference is justified.  However, we will rephrase the sentence accordingly:	No changes made.

		They are, independent of rock type, often highly heterogeneous because of layering, localized fracturing, and diagenesis (e.g., Aragón-Aguilar et al., 2017; De Marsily, 1986; Lee and Farmer, 1993; Manning and Ingebritsen, 1999; Zhang, 2013).	
2.5	<p><b>Line 37-39:</b> The logic here is odd. You describe high porosity in sedimentary geothermal systems, then say fracture porosity in sedimentary rocks is low (are dam sites really the best analog, i.e. Snow, 1968?), but that fractures dominate geothermal systems.</p> <p>Separately these statements may all be true, but fractures commonly dominate in geothermal systems because geothermal systems are commonly not hosted in sedimentary rocks.</p> <p>Also, you may want to specify “clastic” sedimentary reservoirs, as fractures can be very significant contributors in carbonate rocks.</p>	<p>2.5.1: We do not understand the logic of the reviewer's comment. We wrote that fractures have a dominant control on rock permeability in geothermal reservoirs, even though their contribution to bulk porosity is negligible compared to matrix porosity. We are convinced that we have communicated this correctly in our discussion paper.</p> <p><i>Snow (1968) is highly appropriate in this case, because Snow (1968) analysed fracture porosity in different rock types, The fact Snow (1968) used outcrops at dam sites is highly relevant here, because the known intrinsic permeability at the dam sites were an asset to calculate the fracture porosity.</i></p> <p>2.5.2: We strongly disagree that geothermal systems are commonly not hosted in sedimentary rocks. There is a large number of examples worldwide for geothermal systems in sedimentary rocks (see Moeck, 2014). We also strongly disagree with the reviewer’s point that fractures only play a minor role in geothermal systems hosted in sediments. For instance in the Upper Rhine Graben, the permeability is controlled by fractures in lithified sedimentary rocks (Meixner et al., 2014; Egert et al., 2018).</p> <p>2.5.3: We disagree. This study could be used for both clastic and carbonate reservoirs. The range of parameters used in this study covers both cases. Fractures dominate most deep geothermal systems.</p>	No changes made.
2.6	Line 42-43: The statement about specific failures needs referencing.	We are aware of this issue. However, this is tricky, since such negative examples are commonly not published in scientific literature. In our experience links to webpages on failed projects disappeared over time. Nevertheless, we will provide links to websites, if possible.	Changes made in lines 42-44
2.7	<b>Line 45:</b> Beall (1994) does not appear to be about declines in production fluids nor fault damage zones, but rather to be about tracer tests and what can be learned about fluid saturations.	We have deleted the reference to Beall (1994).	Changes made in line 47-48.



2.8	<p><b>Line 48-50:</b> BHG is a huge part of your overall paper but has a tiny role in the introduction. This should be much larger, with specific examples of where it has impacted production. It could be your primary hypothesis and seems like the major contribution, but it is not firmly established in the introduction. As it stands, the introduction does not lay the necessary foundation for the paper, not establish a clear hypothesis, but it could be reworded to emphasis BHG (see comments about 363-368).</p>	<p>Please see our answer to your general comment (point 1.3) above.</p> <p>In accordance to R1 and R2, we have improved the introduction regarding the BHG. However, we are convinced that, even though the BGH is important, that the introduction as well as the other parts of the manuscript should remain balanced regarding the investigated parameters.</p> <p>We strongly disagree that the aim of our manuscript was not sufficiently communicated. In lines 51-56 (discussion paper), we did provide the objective of our manuscript.</p> <p>We, as requested by R1 and R2, have modified this part and included more details.</p>	Changes made in line 58-66.
2.9	<p><b>Line 58:</b> The lifespan of 200 years is not well justified. This is longer than the nominal lifespan of geothermal powerplants (which may be closer to 30-50 years). Furthermore, most of your graphs show major deviations between scenarios early in the life of the model. I'd change the approach and the figures (graphs) to emphasize time frames that are more relevant to plant economics.</p>	See our answer to point 1.1.	No changes made. See lines 67-72 for the concept of our study.
2.10	<p><b>Line 61:</b> Regarding 100°C as a threshold. On cursory examination, I did not find reference to this number (which seems very low and rarely economic unless the system is particularly shallow, productive, or in a great market) in the DiPippo volume. Instead, look into Bertani (2005) for some examples of typical producing (and presumably economic) values. Furthermore, I would expect major economic and efficiency loss well before your</p>	<p>We do not consider efficiency loss. We also do not carry out an economic feasibility study; see our objective. In our introduction (discussion paper), we communicate that we carried out a sensitivity study in which we investigate the influence of petrophysical and other parameters on the thermal development of geothermal reservoirs. Thus, the points addressed by the reviewer are not the focus of our manuscript.</p> <p>See our answer to point 1.1.</p>	Changes made in lines 90-94.

	<p>production temperature declined from 150 to 100°C.</p> <p>Bertani, R. (2005). World geothermal power generation in the period 2001–2005. <i>Geothermics</i>, 34(6), 651-690.</p> <p>10.1016/j.geothermics.2005.09.00_</p>		
<b>2.11</b>	<b>Line 66-68:</b> Consider emphasizing BHG instead of all the others.	We have, according to the comments by R1 and R2, rewritten the last section of the introduction, with focus on the objective of our study. In our opinion, the presentation and discussion of the results is well balanced concerning the different investigated parameters.	No changes made.
<b>2.12</b>	<b>Line 94-95:</b> The issue with well spacing seems to distract from BHG, until you specifically related the impact of BHG on effective well spacing. The introduction of parameters overall could take more care.	<p>With our manuscript, we do not concentrate solely on the BHG. We present a sensitivity study in which we examine different parameters for their importance. One is well spacing. No changes needed.</p> <p>Again, the reviewer draws all the attention to the BHG. In addition, the effect of the BHG on well distance is made. We described it in short but appropriately and with the possible details in lines 187 – 197 (discussion paper).</p>	<p>No changes made.</p> <p>Impact of BHG is described in lines 194-197 (SED).</p> <p>Parameters are introduced in line 126-129 and 185-187 (SED).</p>
<b>2.13</b>	Line 97: Change to 0.047C/m-1	We thank the reviewer and corrected the typo.	Changes made in line 141.
<b>2.14</b>	<b>Line 97:</b> Is a linear gradient throughout justified? In higher permeability systems you may expect isothermal reservoirs.	Numerous studies have shown that a linear geothermal gradient is a good first order approximation for temperatures that are determined by heat conduction only. The initial temperatures in the model represent temperatures that are undisturbed by fluid flow, and therefore can be represented by a linear geothermal gradient. In some high permeability systems, thermal convection or topography-driven flow could affect background temperatures to an unknown degree. However, the focus of the paper was to explore the effect of induced fluid flow between the injection and production well on subsurface temperatures. Using a different initial geothermal gradient for different parameter sets would make it difficult to compare the different model runs.	Changes made in lines 82-86 and 143-144.
<b>2.15</b>	<b>Line 117-119:</b> You have a high geothermal gradient given limited vertical advection.	Our model scenarios describe both situations, i.e., we have model runs for geothermal reservoirs with fracture anisotropy, faults and for layered sedimentary aquifers. The	No changes made.

	Perhaps this study really is best described as analogous to hot sedimentary aquifers, rather than more conventional fault-fracture hydrothermal systems? I don't recall seeing this distinction.	geothermal gradient that we use is relatively high, but not unusual. The reason for not varying the geothermal gradient for the different model scenarios is discussed in the reply to the previous point.	
<b>2.16</b>	<b>Line 127-129:</b> Is the combination of porosity of 14% and a permeability of 10-15m2 realistic?	To carry out a sensitivity study, we also need to combine different parameter values, even if they are sometimes unrealistic. This is inevitable in a one at a time sensitivity study. The base case value of a permeability of 10-13 m2 and a porosity of 14% is certainly realistic. We did not consider co-varying porosity and permeability in our sensitivity study. We understood also from the comments from R1 and R2 that we had to improve our methods section regarding this matter. We have now modified it and describe how permeability and porosity is implemented.	Changes made in lines 78-86 and 176-182.
<b>2.17</b>	<b>Line 140:</b> A 7 m wide fault core is quite large. Can you include references to justify this model parameter?	7m is wide, but not unusual; see for instance Childs et al. (2009). Furthermore, we chose to model the fault core with this thickness to avoid the high computational cost of very fine meshes. At any rate, the thickness of the fault core is somewhat irrelevant, because the fault core was modeled as an impermeable unit.	No changes made
<b>2.18</b>	<b>Line 154:</b> Again, the model time of 200 years, while perhaps arbitrary, is not particularly relevant to producing geothermal fields.	Please see our answer to point 1.1.	No changes made. For the concept of our study see lines 67-71.
<b>2.19</b>	<b>Line 193-197:</b> This is an interesting finding, but it is lost in the paper because the structure is not set up as a test of the influence of BHG compared to other parameters (see lines 66-68). Couching this section in terms of BHG would bring more coherence to the results and discussion.	We thank the reviewer. We investigated many more parameters and we do not agree that this point is lost. Instead, we feel that our manuscript is well balanced when discussing the contributions of BHG but also the other parameters that were included in the sensitivity study. see also point 2.11.	No changes made.
<b>2.20</b>	<b>Line 202:</b> 10-15 m2 seems very low for a sandstone with 14% porosity. Better geologic constraints on parameter space would make the results more defensible (see notes Line 720).	Please see our answers to points 1.1 and 2.16.	Changes made in line 78-86, and 176-182.

2.21	<b>Line 317:</b> There seems to be a disconnect between statement and reference here. I don't think Alava et al. (2009) discuss porosity or permeability, and if it is a different parameter they describe it should perhaps be clearly specified separately instead of grouped with other references.	We have rephrased this part accordingly. Instead of: The variability of these and other petrophysical parameters increases with scale (Alava et al., 2009; Freudenthal, 1968; Krumbholz et al., 2014a). We now write: The variability of these (Freudenthal, 1968; Krumbholz et al., 2014a) and other (petro)physical parameters (Alava et al., 2009; Lobo-Guerrero and Vallejo, 2006) increases with scale.	Changes made in lines 402-404.
2.22	<b>Line 337:</b> Although bottom hole pressures exceeding lithostatic may not be unreasonable, it is not clear that your model responds to these conditions by fracturing, nor would this condition be favorable (or even permissible) in a permitted injection well. Constraining your model space to geologically reasonable conditions would make the results more useful.	The model does not include any fracturing, i.e., lithostatic pore pressures only affect fluid flow, and not permeability or porosity. Constraining the parameter space to sub-lithostatic pore pressures would result in a loss of information, because either parameters would have to be varied together (i.e., adjusting injection rate along with permeability) which would make it much more difficult to compare models and to isolate the effect of a single parameter	Changes made in lines 178-179.  See additionally lines 159-164 and 176-182.
2.23	<b>Line 342:</b> Aren't pores and fractures always filled with fluid?	We agree with the reviewer and will delete "commonly" in Line 342.	Changes made in line 429
2.24	<b>Line 342.</b> "Since pore space often exceeds: : " is not needed in this argument, as you say "high porosity" later in the sentence. The "since" statement is distracting, as there are many counter examples.	We will rephrase the sentence.	Changes made in lines 429-430.
2.25	<b>Line 348.</b> Again, regarding parameter space, if 10-13 m2 is the threshold, why bother with the very low permeability cases?	See our answer to point 1.1.	Changes made in lines 82-86, 176-182, and 228-235.
2.26	<b>Line 363-368:</b> This passage makes the point that your models considering BHG are important, but it needs to be expanded, and more rigorously explored and cited (there should be many examples of fields that target	Regarding the many examples: we are not aware of many published examples of geothermal fields that discuss or report BHG. See also our answer to point 1.3. However, we will improve the introduction regarding the BHG. The BHG, as our study shows, cannot be analysed or ranked as a standalone parameter, it must be seen in combination with other parameters.	Changes made in lines 58-66

	outflow zones for reinjection and upflow zones for production). I'd also consider moving a version of this into the introduction when you describe the importance of BHG.		
<b>2.27</b>	<b>Line 388:</b> Check "metre" for journal style.	We used British style English throughout the manuscript, as allowed by the Journal.	No changes made
<b>2.28</b>	<b>Line 406:</b> "scales" to "scale"	Done	Changes made in line 496
<b>2.29</b>	<b>Line 411:</b> I would either cite or change this first statement.	The statement is, in our opinion, sufficiently referenced after the following sentence. See Line 412-413 in discussion paper.	No changes were made.
<b>2.30</b>	<b>Line 411-424:</b> Another and significant reason there is an interest in fault zones is that fault zones are fundamental parts in many producing geothermal fields because they provide the necessary vertical permeability and advection of heat and fluid so that high temperatures are shallow enough to be economically exploited. I think your passage misses this by focusing on the complexities of faults instead of the constraint that many fields and models will by necessity involve faults.	We thank the reviewer for the suggestion and will add a statement about faults as thermal anomalies. However, we consider the effects of the fault on the reservoir itself and do not consider the possible thermal anomaly that allows for a shallower exploitation (see line 117-118 SED).	Changes made in lines 52-56, 502, and 534-536
<b>2.31</b>	<b>Line 439-441.</b> This passage is probably not necessary.	We disagree, we think it is important to discuss or least mention the restriction of our study.	No changes made
<b>2.32</b>	<b>Line 445.</b> Although the ranges may be real, the combination of ranges seem less plausible.	The combination of ranges may seem less plausible, but this combination was necessary to see the effects of individual parameters, and is a standard approach in one-at-a-time sensitivity analysis. See point 1.1.	Changes made in lines 67-71, 78-86, and 176-182.
<b>2.33</b>	<b>Line 472:</b> There is an extra space resulting in a broken link.	Corrected	Changes made in line 575.
<b>2.34</b>	<b>Line 648</b> (Figure 2 g). Please consider a shorter time span and temperature range.	See our answer to point 1.1.	No changes made.

	<p>The timespan of 200 years and wide range in T (40-180°C) masks the more relevant changes early in the lifespan of a well or geothermal field.</p> <p>Furthermore, smaller drops in temperature would nonetheless have major impacts on plant efficiency. This comment applies even more to your fault-controlled models that show major changes in the first few years.</p>		
<b>2.35</b>	<p><b>Line 720</b> (Figure 10). It would be nice to see these plotted together as x-y, so you could support your use of 14% porosity and low permeability. Because this is described as a more generic model, might it also make sense to show values from other geothermal fields producing in sedimentary basins?</p>	<p>This is not possible, because the data are derived from several publications. Same region, but different places. In addition, most of the data are not linked (with the exception of Bauer et. al. (2018)). The purpose of this figure is to show just how variable rock properties are. See point 1.1.</p>	<p>No changes made.</p>

### Additional author changes

1	Line 1	Included porosity to the title.
2	Lines 100	Corrected a typo
3	Line 189	Corrected a typo
4	Line 815	Modified Figure 3. Icons for E and W oriented BHGs were missing.

Some further small changes by the authors, that are not requested by the reviewers, comprise only improvements of wording and are marked but not further annotated in the revised manuscript.

# A numerical sensitivity study of how permeability, porosity, geological structure, and hydraulic gradient control the lifetime of a geothermal reservoir

Johanna F. Bauer<sup>1,2</sup>, Michael Krumbholz<sup>3</sup>, Elco Luijendijk<sup>3</sup>Luijendijk<sup>1</sup>, David C. Tanner<sup>4</sup>

<sup>1</sup>Department of Structural Geology and Geodynamics, Georg August University of Göttingen, 37077 Göttingen, Germany

<sup>2</sup>now at Department of Rock Physics & Borehole Geophysics, Leibniz Institute for Applied Geophysics, 30655 Hanover, Germany

<sup>3</sup>Department of Structural Geology and Geodynamics, Georg August University of Göttingen, 37077 Göttingen, Germany

<sup>4</sup>Independent researcher

<sup>4</sup>Department of Seismic, Gravimetry, and Magnetism, Leibniz Institute for Applied Geophysics, 30655 Hanover, Germany

Correspondence to: Johanna F. Bauer (Johanna.Bauer@leibniz-liag.de)

**Abstract.** Geothermal energy is an important and sustainable resource that has more potential than is currently utilized. Whether or not a deep geothermal resource can be exploited, mostly depends on, besides temperature, mostly the utilizable reservoir volume over time, which in turn largely depends on petrophysical parameters. We show, using a large series over one thousand ( $n = 1027$ ) of 4-dimensional finite-element models of a simple geothermal doublet, that the lifetime of a reservoir is a complex function of its geological parameters, their heterogeneity, and the background hydraulic gradient (BHG). In our models, we test the effects of porosity, permeability, and BHG in an isotropic medium. Further more, we simulate the effect of permeability contrast and anisotropy induced by layering, fractures, and a fault. We quantify the lifetime of the reservoir by measuring the time to thermal breakthrough, i.e., how many years pass before the temperature of the produced fluid falls below the 100°C threshold isotherm (HDI) reaches the production well. The results of our sensitivity study results attest to the positive effect of high porosity; however, high permeability and BHG can combine to outperform the former. Particular Certain configurations of all the parameters can cause either early thermal breakthrough or extreme longevity of the reservoir. For example, the presence of high permeability fractures, e.g., in a fault damage zone, can provide initially high yields, but it channels fluid flow and therefore dramatically restricts the exploitable reservoir volume. We demonstrate that the magnitude and orientation of the BHG, provided permeability is sufficiently high, are the prime parameters that affect the lifetime of a reservoir. Our numerical experiments show also that BHGs (low and high) can be outperformed by comparatively small variations in permeability contrast ( $10^3$ ) and fracture-induced permeability anisotropy ( $10^1$ ) that thus strongly affect the performance of geothermal reservoirs.

Kommentiert [A1]: AC point 1

Kommentiert [A2]: Small changes by the authors not requested by the reviewers comprise only improvements of wording are not further annotated

Kommentiert [A3]: R2 – point 2.25

Kommentiert [A4]: R1 – point 4.1  
No changes made



## 1 Introduction

30 The amount of geothermal energy that can be economically extracted from a reservoir depends, to a first order, on reservoir temperature, permeability, and utilizable reservoir volume. While temperature is often well constrained, the latter two parameters are more difficult to predict (e.g., Bauer et al., 2017; Bauer, 2018; Kushnir et al., 2018; Laubach et al., 2009; Seeburger and Zoback, 1982). The most important parameters named-recognised in the literature are porosity and permeability (e.g., Agemar et al., 2014; Moeck, 2014; Tiab and Donaldson, 2004). They are often highly heterogeneous because of layering, 35 localized fracturing, and diagenesis (e.g., Aragón-Aguilar et al., 2017; De Marsily, 1986; Manning and Ingebritsen, 1999; Zhang, 2013). The vast majority of hydrothermal systems/Deep-geothermal systems can be considered dual-porosity systems, where porosity is provided by both pore space and fractures (Gringarten, 1984; Warren and Root, 1963).

In sedimentary geothermal reservoirs, the matrix porosity can exceed 30% and is often highly variable even on a small scale, e.g., within or between different sedimentary layers (e.g., Bär, 2012; Bauer et al., 2017; Heap et al., 2017; Zhang, 2013). 40 Fracture porosity of sedimentary rocks, in contrast, is commonly significantly lower than matrix porosity and rarely exceeds 0.001% (e.g., Snow, 1968; van Golf-Racht, 1982). Nevertheless, permeability, and therefore flow rate in geothermal reservoirs, is dominantly controlled by fractures (e.g., Bear, 1993; De Marsily, 1986; Hestir and Long, 1990; Nelson, 1985). Intrinsic fracture permeability is determined by the cube of the fracture aperture, while the permeability of fractured and porous 45 reservoirs is related to the fracture system and the connection between fractures and pore space (De Marsily, 1986; Odling et al., 1999; Ran et al., 2014). Importantly, geometry, spatial distribution of fractures, and the resulting permeability anisotropy of a fracture system, are difficult to predict (e.g., Laubach et al., 2014; Ortega and Marrett, 2000; Watkins et al., 2018). A number of deep geothermal projects in southern Germany (e.g., Trebur (Erdwerk), Offenbach, Speyer, Bad Urach, Mauerstetten (iTG), and Geretsried (iTG)) were unsuccessful because they failed to predict the hydraulic properties of the fracture system(s). In addition, there have been cases where, after a successful initial phase, the temperature of the production

50 fluid dropped unexpectedly. Several of these cases were observed in faulted reservoirs, i.e., in cases with where production and injection wells were placed within a highly-permeable fault damage zone (e.g., Beall et al., 1994; Bödvarsson and Tsang, 1982; Diaz et al., 2016; Horne, 1982a,b; MacDonald et al., 1992; Ocampo et al., 1998; Parini et al., 1996; Tenma et al., 2008). These fault zone permeabilities are often highly variable, i.e., they have been reported to reach from about  $10^{-20}$  to  $10^{-11}$  m<sup>2</sup>, with the lowest values typically found in the fault core (Evans et al., 1997; Lopez and Smith, 1996; Shipton et al., 2002). In addition, 55 deep-seated, highly permeable faults are of interest for exploration because they can constitute positive thermal anomalies (Sanjuan et al., 2014; Vidal and Genter, 2018).

Geothermal reservoirs are also affected by other factors, such as the background hydraulic gradient (BHG) and its interaction with the artificial flow field caused by the production. The BHG is, to our best knowledge, frequently-not-often-not considered when-evaluating-the-performance-of-a-prospective-reservoir-in model studies of geothermal systems, even though it may 60 strongly affect the reservoir's lifetime (Bense et al., 2013; Hochstein, 1988; Moeck, 2014). Hydraulic gradients generated by groundwater recharge and discharge at the land surface average 1% (10 mm m<sup>-1</sup>; Fan et al., 2013; Gleeson et al., 2016). These

Kommentiert [A5]: R3 – point 2.1

Kommentiert [A6]: R3 – point 2.3 - No changes made

Kommentiert [A7]: R3 – point 2.4 - No changes made

Kommentiert [A8]: R1 – point 5.1

Kommentiert [A9]: R3 – point 2.5 - No changes made

Kommentiert [A10]: R2 – point 2.1

Kommentiert [A11]: R3 – point 2.6

Kommentiert [A12]: R3 – point 2.7

Kommentiert [A13]: R1 – point 6.9

R2 – point 2.7

R3 – point 2.30

Kommentiert [A14]: R1 – points 1.1, 1.2, 6.7, 6.10, 8.4

R3 – point 1.3, 2.8, 2.26

gradients dissipate at depth, especially in systems that contain low-permeable units that overlie geothermal reservoirs. However, lateral gradients can also be generated by a multitude of other processes, including sediment compaction, clay mineral diagenesis, and buoyancy caused by changes in temperature or salinity (Bachu, 1995; Ingebritsen et al., 2006). These are often an order of magnitude lower than the driving force generated by recharge and discharge at the land surface, but have been shown to affect groundwater flow in a diverse range of geological settings (Garven 1995, Ingebritsen et al. 2006).

Here, we present a non-site specific sensitivity analysis of a 4-dimensional finite-element model of fluid and heat flow in a reservoir that comprises more than a thousand individual model runs. Our objective of our study is to quantify the effects of various parameters on the lifetime-temperature development of a geothermal reservoir and to quantify to what extent how exactly these parameters should be known to allow for reliable estimates on the lifetime of a geothermal reservoir. In addition, we evaluate under which circumstances a closed geothermal system can be achieved, i.e., when the injection- and production well doublet is hydraulically connected.

We present a sensitivity analysis of a 4-dimensional finite-element model of fluid and heat flow in a reservoir. In this respect To achieve these objectives, we examine the importance of porosity, permeability, and permeability anisotropy on reservoir lifetime. We systematically test the effects of all these parameters for homogenous, layered, fractured, and faulted reservoirs. In addition Furthermore, we apply BHGs of varying different magnitude and orientation to each of the different reservoir configurations.

The values for porosity and permeability that were included covered a range that is considered desirable for geothermal reservoir, but also included values that lie above and below these values. Specifically, we used permeabilities of  $10^{-15}$ ,  $10^{-13}$ , and  $10^{-11}$  m<sup>2</sup> and porosities of 3, 14, and 25%. With these values, we cover a large range of lithologies that could host geothermal reservoirs, i.e., fractured igneous and metamorphic rocks, as well as densely and less densely fractured sandstones or limestones (Bear, 1972; Freeze and Cherry, 1979; Lee and Farmer, 1993; Moeck, 2014). The one-at-a-time sensitivity analysis resulted in some parameter combinations (e.g., of porosity and permeability) that, while uncommon in nature, nevertheless help to identify the impact of individual parameters. At the same time, other parameters such as temperature gradient, production- and injection rate were kept constant to avoid exponential growth of the number of modelled parameter combinations, also known as the “curse of dimensionality” (Bellman, 2003).

## 2 Methods

We simulated fluid- and heat flow for a geothermal doublet, with an one injection- and a one production well, over a time span of 200 years. We use The model results to quantify the effect of different geological parameters on the lifetime of a geothermal energy-production reservoir, i.e., the time during which the temperature of the produced fluid is above a critical value. As a benchmark for the reservoir’s performance, we choose to record the time before the production temperature reaches 100°C isotherm (HDT) reaches the production well. This is because 100°C is often taken as the threshold minimum temperature above which the that allows the generation of electrical energy is economical with binary cycles (e.g., Bhatia, 2014; Buness et al.,

**Kommentiert [A15]:** R1 – points 1.1, 6.8, 7.2, 8.1.  
R2 – point 2.6  
R3 – points 1.1, 2.9, 2.18, 2.32

**Kommentiert [A16]:** R1 – point 3.3, 3.5, 6.8  
R3 – points 1.1, 2.16, 2.20, 2.25, 2.32

**Kommentiert [A17]:** R1 – points 6.4  
R3 – point 2.14

**Kommentiert [A18]:** R1 – point 6.1

**Kommentiert [A19]:** R3 – point 1.1, 2.2, 2.10

**Kommentiert [A20]:** R3 – point 2.1

2010; Erec, 2004; DiPippo, 2005; Huenges, 2010; Mergner et al., 2012). We performed a series of over one thousand ( $n = 1027$ ) model experiments, during which we systematically varied the values of parameters considered critical (e.g., Agemar et al., 2014; DiPippo, 2005; Moeck, 2014; Tiab and Donaldson, 2004), such as porosity and permeability, within ranges typical for e.g., sandstones, and limestones, igneous, and metamorphic rocks (Bear, 1972; Freeze and Cherry, 1979; Lee and Farmer, 1993; Moeck, 2014) and conditions desirable for geothermal reservoirs (e.g., Agemar et al., 2014; Stober et al., 2017). In addition, we increased the complexity of the geological structure and permeability distribution by including sedimentary layering, permeability anisotropy induced by fracture networks, and a fault zone. Furthermore, the performance of all 1027 models include was tested that the BHG was measured under systematically varied under different BHGs.

**Kommentiert [A21]:** R2 – point 2.25

**Kommentiert [A22]:** R3 – point 2.11  
No changes necessary.

**Kommentiert [A23]:** AC – point 2  
Corrected a typo

## 2.1 Numerical model

The numerical model experiments were carried out using finite-element modelling (FEM) with the COMSOL Multiphysics®5.0 software package, including the sub-surface flow module for fluid flow in porous media and for heat flow (COMSOL Multiphysics®). Fluid and heat flow were modelled by solving the following equations:

$$(\rho C_p)_{eq} \frac{\partial T}{\partial t} + \rho C_p q \cdot \nabla T = \nabla \cdot (k_{eq} \nabla T) + Q \quad (1)$$

Equation (1), COMSOL, states that change in temperature ( $\nabla T$ ) at one point in the model is caused by conductive and advective processes (left-hand side) or due to a heat source or sink ( $Q$ , right-hand side). The effective volumetric heat capacity  $(\rho C_p)_{eq}$ ; Eq. (2), COMSOL, and the effective thermal conductivity ( $k_{eq}$ ; Eq. (3), COMSOL) used in this equation, represent the equalised value between the rock matrix and the fluid ( $1 - \text{porosity } [0]$ ).

$$(\rho C_p)_{eq} = \theta_s (\rho C_p)_s + (1 - \theta_s) (\rho C_p)_f \quad [\text{J kg}^{-1} \text{K}^{-1}] \quad (2)$$

$$k_{eq} = \theta_s k_s + (1 - \theta_s) k_f \quad [\text{W m}^{-1} \text{K}^{-1}] \quad (3)$$

Equation (1), (1), COMSOL, 2017) states that change in temperature ( $\nabla T$ ) at one point in the model is caused by conductive and advective processes (left-hand side) or due to a heat source or sink ( $Q$ , right-hand side). The effective volumetric heat capacity  $(\rho C_p)_{eq}$ ; (Eq. (2), COMSOL, 2017) and the effective thermal conductivity  $k_{eq}$ ; ( $k_{eq}$ ; Eq. (3), COMSOL, 2017) used in this equation, represents the equalised value between the rock matrix and the fluid ( $1 - \text{porosity } [0]$ ).

**Kommentiert [A24]:** R2 – point 2.2

**Kommentiert [A25]:** R2 – point 2.2

The velocity field,  $q$ , of the advective term in Eq. (1) was implemented by adding the flow field, as described by Darcy's Law (Eqs. (4) & (5), COMSOL, 2018), which states that the fluid flow direction is controlled by the hydraulic gradient:

$$Q_m = \frac{\partial}{\partial t} (\rho \theta_s) + \nabla \cdot (\rho q) \quad [\text{m}^3 \text{s}] \quad (4)$$

$$q = -\frac{\kappa}{\mu} (\nabla p + \rho g \nabla D) \quad [\text{m s}^{-1}] \quad (5)$$

where  $c_p$  is the heat capacity,  $k$  is thermal conductivity,  $\theta$  is the porosity,  $Q_m$  is the mass source,  $\rho$  is the density,  $\kappa$  is the permeability,  $q$  is the fluid velocity field,  $\mu$  is the fluid viscosity,  $\nabla p$  is the pressure gradient vector,  $g$  is acceleration due to gravity, and  $\nabla D$  is the unit vector over which gravity acts. The subscripts  $s$  and  $f$  denote solid and fluid, respectively.

## 2.2 Geometry of the model

125 The modelled volume measures 4000 x 4000 x 2300 m (length, width, height, respectively) and was placed at a depth from 1600 to 3900 m below the surface (Fig. 1a). ~~The whole model domain can be initially considered a potential reservoir volume, i.e., our study investigates which parameters influence the volume that actually can be utilized as a reservoir.~~ The domain was subdivided in tetrahedral elements with edge lengths that vary from 712 m at the boundaries to 1 m around the injection- and production wells. Since the minimum mesh size was 1 m, ~~the this was also the smallest possible well diameter was also 1 m.~~

130 ~~To adjust for the unrealistic large diameter of the wells, i.e. to simulate a perforated production zone with a realistic surface area, we assigned the production zone a length of 20 m. Considering a standard well diameter of 6 5/8" (about 17 cm), this corresponds to an production zone of 118 m. To account for the unrealistically high diameter of the wells, we decided that the "active" part of the wells was only 20 m in length, which corresponds to an active well of about 118 m, considering a standard well diameter of 6 5/8" (about 17 cm).~~ Both wells are inclined (to the vertical) by 30° degrees to the west. The reason for this is to place both within the western damage zone of the fault in Scenario 5 (Fig. 1f). To keep the models comparable, this configuration was used in all scenarios. The injection- and production wells are 1500 m apart from each other, N-S aligned, with the production and injection wells to the N and S, respectively (Fig. 1a). In one scenario, we investigated the effect of the ~~the separation of the wells well spacing~~ by varying the ~~separation distance between production and injection the wells~~ from 500 m to 2000 m in 250 m steps.

## 140 2.3 Temperature

We applied a linear geothermal gradient of  $0.047^\circ\text{C km}^{-1}$ , and a surface temperature of  $0^\circ\text{C}$ , which resulted in an initial temperature of  $150^\circ\text{C}$  at the well depth of 3200 m, ~~that allows for geothermal power generation.~~ The initial temperature ranged from  $75^\circ\text{C}$  at the top to  $183^\circ\text{C}$  at the bottom of the model domain. ~~A linear geothermal gradient was chosen, because it is a good first order approximation for temperatures determined by heat conduction.~~

145 The top and bottom boundaries were thermally isolated: i.e., ~~the heat flux over through~~ these boundaries was set to zero. This approximation ignores the background geothermal heat flux. However, over the comparatively short modelled time limit (200 years), a background heat flux of  $65 \text{ mW m}^{-2}$  would only add  $0.08 \text{ J per m}^3$  to the model domain, and therefore would not change significantly the model results significantly. The side boundaries are modelled as follows: In cases where fluid flow is inward directed, heat can flow into the model, as defined by the temperature gradient. If, however, fluid flow is directed outwards, the heat flux at the boundary is ~~set to zero.~~ ~~Consequently, the model results are not affected by the size of the modelled volume. The only restriction caused by the size is that the whole shape of the  $100^\circ\text{C}$  isotherm (HDI), i.e., the envelope~~

Kommentiert [A26]: R1 – point 6.2

Kommentiert [A27]: R1 – point 6.3  
R2 – point 2.3

Kommentiert [A28]: R2 – point 1.4

Kommentiert [A29]: R3 – point 2.12

Kommentiert [A30]: R1 – point 6.4;  
R2 – 2.4  
R3 – 2.13

Kommentiert [A31]: R1 – points 2.1, 6.4  
R3 – point 2.14

Kommentiert [A32]: R1 – points 6.2 / 6.5  
R2 – point 2.9

of the reservoir volume with temperatures lower than 100°C. can be examined in all cases. While it would have been preferable to place the lateral boundaries further away, the model domain was kept comparatively small to reduce computational costs.

#### 2.4 Fluid flow, permeability, and porosity

155 The upper and lower model boundaries were closed to fluid flow. A BHG was simulated in the model, which was varied in magnitude and direction in different model runs (Fig. 1b). The BHGs simulated in the models, were applied as a pressure gradients on the model boundaries from different directions and are thus valid in for the whole model domain (Fig. 1b).

160 We applied a specified flow rate of 75 l s<sup>-1</sup> that was distributed over a cylindrical body that represents the active part of the injection- and production wells. The BHG and the artificial flow field introduced by injection and production wells can interact. We decided to use a fixed flow rate in our models, because it warrants, in contrast to the use of a fixed draw-down pressure, comparability of the models, because the amount of injected cold fluid is constant and thus achieves flow velocities that are not a function of the bottomhole pressure. Second, a fixed flow rate allows to identify the effect of the tested petrophysical and structural parameters by providing the necessary fluid flux, i.e. it avoids extremely low flow rates. A further effect is that the relation between bottomhole pressure and BHG is only controlled by permeability.

165 The temperature of the reinjected fluid was set to 40°C. The density and viscosity of the fluid (Table 1) were assumed constant (Table 1), which means that fluid flow directly affects temperature, but changes in model temperature did do not change fluid density and cause density-driven fluid flow. This simplification avoids thermal convection and reduces computational costs time significantly from about 500 min to about 6 min for each model (PC platform configuration: Intel Xeon E31225 with clock rate: 3.1 GHz and 8 GB RAM). In addition, thermal convection is unlikely to occur in sedimentary settings, because it requires thick homogeneous and highly permeable formations, whereas the establishment of convection cells is efficiently hindered by thin low-permeability layers that are a common feature in most sedimentary rocks (Bjørlykke et al., 1988; Moeck, 2014). The exception may be thermal convection in large, steep, continuous fault zones (Simms and Garven, 2004), which we did do not investigate here. Moreover, thermal convection generates fluid fluxes that are is commonly lower than fluxes generated by topography-driven flow (Garven, 1995), and are also lower than the flow regimes induced by the injection and production of fluids wells in the model domain.

175 Permeability was implemented using the continuum approach, which is, for sufficiently large volumes, a reasonable approximation (e.g. Berkowitz et al., 1988). In the continuum approach, hydraulic properties are assigned to a replacement media which has the mean hydraulic properties of a given fracture system. In our study, the parameters porosity and permeability are not coupled, i.e., because we vary each parameter separately. Therefore, we do not consider the role of effective porosity. Lithostatic pore pressures affect only fluid flow, but not permeability or porosity. Porosity controls the heat capacity of a given volume. Since fracture porosity is typically not higher than 0.001 % (e.g., Snow, 1968; van Golf-Racht, 1982) its contribution to heat capacity it can be considered neglectable.

Kommentiert [A33]: R1 – points 6.6 / 6.7, 8.4

Kommentiert [A34]: R1 – points 3.1, 3.2, 3.4, 3.5, 3.6, 8.2, 8.3

Kommentiert [A35]: R2 – point 2.5

Kommentiert [A36]: R1 – points 6.8 / 7.2 / 7.4

R2 – point 2.1, 2.6, 2.26

R3 – points 1.1, 2.16, 2.20, 2.25, 2.32

Kommentiert [A37]: R2 – point 2.1

R3 – point 2.22, 2.25

## 2.5 Scenarios

In the following, we define the basic model properties. Homogenous models do not include any internal structure; isotropic models do not contain fracture anisotropy. Four basic scenarios were investigated (Fig. 1c–f). Material properties used for all models are listed in Table 1.

In the first scenario (Fig. 1c), the reservoir is homogenous and isotropic. We evaluate the time to thermal breakthrough for all combinations of three porosity values ( $\theta = 3, 14, \text{ and } 25\%$ ) and three different permeabilities ( $\kappa = 10^{-15}, 10^{-13}, \text{ and } 10^{-11} \text{ m}^2$ ). For the combination of 14% porosity and permeability of  $10^{-15} \text{ m}^2$ , we tested the effect of the distance between injection- and production wells.

In the second scenario (Fig. 1d), we introduced five horizontal confining layers, each a 100 m thick at intervals of 300 m, into the model volume. The production- and injection wells were placed in a 300 m-thick reservoir. This scenario comprises three series with different reservoir permeabilities ( $\kappa = 10^{-15}, 10^{-13}, \text{ and } 10^{-11} \text{ m}^2$ ). For each of these series, we set the permeability of the horizontal confining layers to be 1 to 4 orders of magnitude lower than that of the reservoir. All units were assigned porosities of 14%.

In the third scenario (Fig. 1e), the model had a porosity of 14%, and a permeability of  $10^{-13} \text{ m}^2$ . We introduced vertical fracture anisotropy that strikes N–S, NE–SW, E–W, and SE–NW and has 1, 2, and 3 orders of magnitude higher fracture permeability compared to the other directions, in an otherwise homogenous media.

To all possible variations of different parameters in these three scenarios, we applied BHGs of 0, 1, 5, and 20 mm  $\text{m}^{-1}$  and varied the BHG direction from  $0^\circ$  to  $315^\circ$  in  $45^\circ$  steps (Fig. 1b).

In the fourth scenario (Fig. 1f), we tested the effect of a N–S striking,  $60^\circ$  westward-dipping fault, which consists of up to three parts; a 7 m wide fault core and two 40 m wide damage zones. We placed both wells in the western damage zone. We assigned a porosity of 14% to the entire model domain. The permeability of the host model volume, representing the host rock, was set at  $10^{-13} \text{ m}^2$ . In the first sub-scenario, the fault was modelled as a single structure, i.e., only as a damage zone only, with a permeability increased by 2 orders of magnitude compared to the host rock. In the second sub-scenario, we simulated a fault that consists of two damage zones and a fault core. The permeability of the damage zones was set to be 2 orders of magnitude higher ( $10^{-11} \text{ m}^2$ ) than the host rock ( $10^{-13} \text{ m}^2$ ) and the permeability of the fault core was set to be 5 orders of magnitude lower ( $10^{-18} \text{ m}^2$ ) than the host rock. Both sub-scenarios were modelled without and with fracture anisotropy within the damage zones. In the latter case, we introduced fracture anisotropy parallel to the fault surface, with permeability 1 order of magnitude higher ( $10^{-10} \text{ m}^2$ ), compared to all other directions.

In this fourth scenario, the orientations of the BHGs are  $000^\circ, 90^\circ, 180^\circ, \text{ and } 270^\circ$ , with simulated magnitudes of 0, 1, 5, and 20 mm  $\text{m}^{-1}$ .

In total, we modelled 1027 experiments with increasing geological complexity. Note that since the range of permeabilities analysed was large, we kept other parameters, including the fluid injection rate, constant, to allow different models to be compared with each other.

Kommentiert [A38]: AC – point 3

Corrected a typo

Kommentiert [A39]: R2 – point 2.12

Kommentiert [A40]: R3 – point 2.17

No changes made

The modelled time limit was 200 years. In several cases, the production temperatures did not reach the threshold in this time, and therefore in these cases the reported lifetimes are underestimated and we give the breakthrough time to be equal or greater than 200 years.

Kommentiert [A41]: R2 – point 2.17

## 2.6 Presentation of results

Since in our sensitivity study, we tested multiple parameters, we decided to present the results of the different (sub) scenarios in multiple figures. In all cases, scatter plots are presented next to each other, which contain the same results. The y-axis always shows the time to thermal breakthrough, i.e., the time until the temperature of the produced fluid falls below the 100°C threshold. The different x-axes are used to portray the results of the different parameters, e.g., permeability, porosity, and direction of the BHG. The magnitude of the BHG is indicated by the colour of the dots. In consequence, the adjacent scatter plots must read as one to identify those parameter(s) that dominantly determine the lifetime of the reservoir.

Kommentiert [A42]: R2 – points 1.2, 1.6, 1.8, 2.8, 2.13, 2.14

## 2.7 Simplification of the model

With our approach, we aim to examine how different reservoir parameters and their interaction affect the lifetime of geothermal reservoirs. Thus, our study is not site specific, but rather investigates, using simplified models, which parameters should be known, and to which accuracy they need to be known for realistic site-specific scenarios. These simplified models consequently suppress site specific effects and concentrate on the parameters investigated.

To compare single parameters, other aspects of the model must be kept constant, even if this does not represent a real-world scenario. For instance, bottom-hole pressure, which, due to the fixed flow rate, depend solely on permeability, can exceed lithostatic pressure.

Kommentiert [A43]: R1 – points 3.1, 3.2, 3.5, 8.2, 8.3

R3 2.25

## 3 Results

### 3.1 Models of reservoirs with homogenous and isotropic structure

In Scenario 1, we explore the role of porosity, permeability, orientation and magnitude of the BHG on fluid flow and geothermal lifetime for a homogenous and isotropic reservoir volume (Fig. 1c). The times in which the HDI reaches the production well, range from a few years only, to a span of time that, in many cases, exceeds the modelled time limit (Fig. 2a–c).

Our results show that in the low permeability models ( $10^{-15} \text{ m}^2$ ), the range of lifetimes observed is less than 40 years. For the model series with intermediate permeability ( $10^{-13} \text{ m}^2$ , commonly taken as the threshold for exploitation of a geothermal reservoir) the range is about 80 years, and in the high permeability model ( $10^{-11} \text{ m}^2$ ), it is almost 200 years (Fig. 2a). This is because higher permeability allows the BHG to outperform the artificially introduced flow field between injection- and production wells (Fig. 2a, b).

Kommentiert [A44]: R1 – point 7.1  
No changes made

250 The effect of the natural BHG on the modelled temperatures becomes apparent if the shape of the HDI is examined (Fig. 2d–f). The HDI is (sub)spherical in models with low and intermediate permeability and in models without BHG (Fig. 2d). In models in which high permeability is combined with a BHG, the HDI becomes ellipsoidal. In the latter cases, the HDI's ellipsoidal long axis is parallel to the BHG direction and its aspect ratio is controlled by permeability and the magnitude of the BHG (Fig. 2e, f). The consequences of the combination of high permeabilities with BHGs are, first, that the HDI encloses a reduced narrower volume (Fig. 2e–f) and, second, that as a consequence the probability chances of an extreme case occurring increases (in which the HDI reaches the production well either very quickly or never at all; Fig. 2b, e, f). In other words, the higher the permeability of a reservoir is, the more the development of the shape of the HDI is controlled by the BHG, while the probability of the HDI reaching the production well decreases. For instance, in models with permeabilities of  $10^{-11} \text{ m}^2$ , the HDI only reaches the production well, if the BHG is (sub)parallel to the artificial by flow field. The expression of the influence of the BHG in terms of the development of the production temperature is shown in more detail in Fig. ure 2g. Without a BHG, the resulting spherical HDI approaches the production well slowly and causes a steady and intermediate temperature drop, compared to the other two examples shown (Fig. 2g). The two contrasting BHGs in Fig. ure 2e2g–f show, either fast (e), or almost no decrease (f) in production temperature.

Kommentiert [A45]: R2 – point 2.10

255 Our results show that the role of porosity is subordinate to the other parameters (Fig. 2c). However, porosity still contributes to differences in observed breakthrough times. In case of the high permeability combined with highest southward-directed BHG, the breakthrough times vary by five years. In the same model, with the magnitude of the BHG at only  $1 \text{ mm m}^{-1}$ , they vary by 20 years (Fig. 2a–c). In general, the influence of porosity in-on expected lifetimes appears to cease with higher permeability and unfavourably directed BHG.

Kommentiert [A46]: R2 – point 2.11

260 In addition, in this scenario we tested the effect of the distance between production and injection wells on time to thermal breakthrough. We used the model setup with  $\kappa = 10^{-13} \text{ m}^2$  and  $\theta = 14\%$ , applied BHGs of different magnitudes and orientations, and increased the distance between the wells in increments of 250 m from 500 to 2000 m (Fig. 3). The We observatione is that lifetime and the range of lifetimes increase with distance. For a well distance of 500 m, the lifetime is approximately 10 years. For a well distance of 1500 m, the lifetimes range from 140 to over 200 years. The reason for this is that the BHG gains influence with increasing well distance. According to the previous set of model experiments (Fig. 2), this effect will be stronger for models with higher permeabilities and vice versa. The results also show that the distance between the wells and the modelled lifetimes do not correlate in a linear manner, but that lifetime increases disproportionately quicker with increasing distance, when comparing models with the same BHG configurations. This is, in the first order, because the volume of the HDI grows with the cube, partly defined by the distance between the wells. However, when a BHG is applied, this correlation is further modified, since the shape of HDI tends to become ellipsoidal, i.e., elongated parallel to the BHG. Consequently, the volume of the HDI is affected, but also the chances of the HDI reaching the production well are reduced since the BHG controls the direction in which the HDI propagates and may hinder a thermal breakthrough.



### 3.2 Models of layered reservoirs

280 In Scenario 2, we investigate the role of permeability contrasts in layered reservoirs by carrying out three series of experiments  
| with different permeabilities (Fig. 1d). Since Scenario 1 showed that porosity is of minor importance, we kept porosity constant  
and used the medium value for porosity from Scenario 1 (14%) in all Scenario 2 experiments. The permeabilities of the  
reservoir layers in the three series were assigned values of  $10^{-15} \text{ m}^2$  (series 1; Fig. 4a, b),  $10^{-13} \text{ m}^2$  (series 2; Fig. 4d, e, c, f, i,  
285  $10^{-11} \text{ m}^2$  (series 3; Fig. 4 g, h);  ~~$10^{-9} \text{ m}^2$~~  and the confining layers were assigned permeabilities 1 to 4 orders of magnitude  
lower than that of the reservoir.

In the models in which the reservoir layers were assigned the lowest permeability ( $10^{-15} \text{ m}^2$ , Fig. 4a, b), the lifetimes depended  
solely on the permeability contrast between reservoir- and confining layers; the BHG is not important. A contrast of 1 order  
of magnitude has little to no effect on the time to thermal breakthrough, compared with a model experiment without confining  
layers, which is otherwise identical (Figs. 2, 4a, b). Permeability contrasts higher than 1 order of magnitude, however, reduce  
290 the utilizable volume and affect the (anticipated) ~~economic~~ lifetime. There is a threshold for the permeability contrast that  
lies between 2 and 3 orders of magnitude (Fig. 4 c, f, i). Above this threshold, the fluid exchange between the reservoir layers  
is efficiently suppressed, i.e., the confining layers become effective barriers, ~~and~~ the shape of the HDI is flat (Fig. 4i), and the  
time to thermal breakthrough is reduced significantly to less than 20 years, independent of the configuration of the applied  
BHG (Fig. 4a, b).

295 In the models with intermediate permeabilities ( $10^{-13} \text{ m}^2$ , Fig. 4d, e) assigned to the reservoir layers, the results show a similar  
pattern to the models with the low permeable reservoir layers (Fig. 4a, b), i.e., for permeability contrast higher than 2 orders  
of magnitude the utilizable volume is restricted to one reservoir layer (Fig. 4i). However, with increased permeability the  
BHG's magnitude and direction begin to influence the lifetime. The time to thermal breakthrough is wider spread; the spread  
increases with the value of the BHG. We observed the largest variation in time to thermal breakthrough, depending on the  
300 BHG, of about 70 years, for a permeability contrast of 2 orders of magnitude. For a permeability contrast of 1 order of  
magnitude, the ~~spread range~~ is almost 30 years, while for contrasts of 3 and 4 orders of magnitude it is only about 20 years  
(Fig. 4d). Similar to the low permeability model, the influence of the BHG is diminished and is only minor for permeability  
contrasts higher than  $10^2$  (Fig. 4a, b, d, e). In this case, even favourably oriented BHGs do not have the potential to improve  
significantly the reservoir lifetime (Fig. 4d, e).

305 In models with highly permeable reservoir layers ( $10^{-11} \text{ m}^2$ , Fig. 4g, h), we observe the same permeability contrast threshold  
of  $10^2$  that hinders the HDI to expand in and across the confining layers, as for the models with the less permeable reservoir  
layers. However, this threshold is no longer the dominant control on the time to thermal breakthrough (Fig. 4g, h). This is  
because the high permeability allows the BHG to shortcut the restrictions caused by the confining layers. The BHG results in  
variation in lifetime for all permeability contrasts that range from less than 10 years to lifetimes that exceed the model time  
310 limit of 200 years. This wide spread of lifetimes is predominantly controlled by the orientation of the BHG with respect to the  
alignment of the wells. Even a low BHGs of  $1 \text{ mm m}^{-1}$ , oriented in opposite direction to the flow induced by the injection- and

Kommentiert [A47]: R2 – point 2.12

Kommentiert [A48]: R3 – point 2.1

Kommentiert [A49]: R2 – point 2.15  
No changes made

production wells, ~~are is~~ sufficient to outperform the artificial flow field and therefore can hinder thermal breakthrough (Fig. 4g, h). The effect of the BHGs orientation is, however, compensated to a small degree by the fact that the high permeability of the reservoir layers allows for a wider lateral spread of the HDI.

315 The development of the temperature field over time (Fig. 4j) is shown for three model runs with different permeability contrasts using the model with intermediate reservoir layer permeability (Fig. 4c, f, i). The temperature drop at the production well depends on the permeability contrast between reservoir and confining layers and is quicker with increasing permeability contrast. ~~In the all~~ model runs ~~presented in Figure 4j~~, temperatures stabilize at a final temperature of about 100°C ~~(Fig. 4j)~~.

Kommentiert [A50]: R1 – point 7.3

### 3.3 Models of reservoirs containing vertical fracture anisotropy

320 In Scenario 3, we introduce permeability anisotropy. Permeability is increased by 1 to 3 orders of magnitude ~~within a the in~~ vertical plane, compared to other directions ~~as common in fractured reservoirs~~. This model scenario represents a ~~vertically~~ ~~vertically-~~fractured reservoir (Figs. 1e, 5). These models use the medium porosity ( $\theta = 14\%$ ) and permeability values ( $\kappa = 10^{13} \text{ m}^2$ ).

Kommentiert [A51]: R1 – point 7.4

325 We observe, in this ~~set-series~~ of models, times to thermal breakthrough that range from less than 10 years to more than 200 years (Fig. 5a–c). This range, however, is restricted to models with N–S striking fracture anisotropy, i.e., when the wells are aligned parallel to the direction of high permeability. In the other cases, with the anisotropy oriented NE–SW, NW–SE or E–W, i.e., at an angle to the well configuration, the HDI does not reach the production well in 200 years (Fig. 5a). This effect occurs for fracture anisotropies of 1 order of magnitude, but at  $10^2$  and higher the effect does not increase ~~in size~~ (Fig. 5b). According to the results shown in Fig. 5a, c the applied BHGs only have an influence on the time to thermal breakthrough

330 when the direction of BHGs is approximately parallel to the well configuration and fracture anisotropy. In such cases, either a high lifetime of the reservoir can be expected if the BHG is directed from the production to the injection well (Fig. 5e, h), or a very short lifetime for the opposite case (Fig. 5g, h). For the latter case, the value of anisotropy has a second-order control on the time to thermal breakthrough because it determines the lateral spread of the HDI and, in consequence, the utilizable reservoir volume.

335 Comparatively low permeability anisotropies of  $10^1$  are sufficient to restrict fluid flux to the direction of highest permeability, which results in the HDI forming a narrow vertical volume parallel to the positive anisotropy (Fig. 5d–g). According to our models, this effect reaches saturation for an anisotropy of  $10^2$  (Fig. 5b). This means that the horizontal extent of the HDI is restricted and a ~~hydraulic connection between the wells~~ ~~closed geothermal “loop” may not be feasible~~ ~~system becomes more~~ ~~unlikely~~. The effect of permeability anisotropy is also stronger than that of the BHG. The BHG is only of importance when

Kommentiert [A52]: R1 – point 7.5

340 oriented parallel to permeability anisotropy and well alignment. In this case, its magnitude and whether it is directed away or towards the production well from the injection well controls the reservoir’s lifetime.

### 3.4 Models of a faulted reservoir

In Scenario 4, we investigate the thermal development of a faulted geothermal reservoirs for two sub-scenarios (Fig. 1f). In the first sub-scenario, the fault zone consists of a highly permeable damage zone ( $10^{-11} \text{ m}^2$ ), while in the second sub-scenario, it consists of two symmetrical damage zones ( $10^{-11} \text{ m}^2$ ) with a low permeable fault core ( $10^{-18} \text{ m}^2$ ) at its-the centre. Both variations were modelled with and without fault parallel fracture anisotropy that increases the permeability by 1 order of magnitude in the damage zone(s)-and for BHGs that are either parallel or normal to the strike of the fault. The permeability of the host rock was in all cases set to  $10^{-13} \text{ m}^2$ .

For the first sub-scenario, the shape of the HDI is partly defined by the damage zone and expands predominantly in the surroundings of the injection well, taking an overall prolate shape (Fig. 6a-c). The temperature at the production well stabilises after about 10-20 years (Fig. 6d). The  $100^\circ\text{C}$  threshold is reached, for the strongest southward-oriented BHG, after about five years, while it is not reached in the modelled time for the highest northwards-oriented BHG. In case of the BHG normal to the strike of the fault, the HDI's shape is comparable with that for the fault-parallel BHG (Fig. 6e, f), but the temperature development in this setup shows almost no difference with the different magnitudes of the BHG or ~~between-with~~ BHGs oriented east or west (Fig. 6g). The temperature falls within 15 to 20 years below the  $100^\circ\text{C}$  threshold and stabilizes at this point. In general, we observe the fault causes a channelling effect.

When modelling cases with a fault-parallel fracture anisotropy in the damage zone (Fig. 7), for north, east, south and west-directed BHGs, the channelling effect increases and the volume of the HDI, independent of the orientation of the BHG, is restricted to the fault zone (Fig. 7a-c, e-f). This channelling effect leads, in the case of fault-parallel BHGs, to a wide spread ~~among-of~~ the time-dependant temperature behaviour (Fig. 7d). For example, in case of the highest northwards-directed BHG, almost no temperature reduction at the production well is observed. For the highest southward-directed BHG, the production temperature falls below the  $100^\circ\text{C}$  threshold after about 2 years (Fig. 7d). All temperatures stabilize after about 15 years.

For the east- and westwards-directed BHGs, differences in the temperature development exist (Fig. 7g), in contrast to similar models without anisotropy (Fig. 6g). In these cases, BHGs oriented in the dip direction of the fault show a faster temperature drop compared to BHGs opposed to the dip direction.

In the second sub-scenario, we increased the permeability of the damage zone compared to the host by 2 orders of magnitude to  $10^{-11} \text{ m}^2$  and introduced a fault core with a permeability of  $10^{-18} \text{ m}^2$ .

In the case without fault-parallel fracture anisotropy, the shapes of the HDIs are restricted on the eastern side by the impermeable fault core and extrude on the western side into the host rock (Fig. 8a-c, e-f). This bulge is concentrated around the injection well; otherwise, the channelling effect leads to a HDI that is largely defined by the high permeable part of the western damage zone, in which both wells are placed. These observations are independent of the orientation of the BHG, i.e., parallel or normal to the strike of the fault.

The temperature development follows the same pattern as in the previous model without fault core (Figs. 6, 8), and it is independent of the orientation and magnitude of the BHG. It is, however, slightly quicker; the range between the different

Kommentiert [A53]: R1 – point 7.7

375 north- and southward-directed BHGs is smaller and does not exist between the east- and westwards-directed BHGs. Only for  
the highest northwards-oriented BHG, ~~does~~ ~~does~~ the temperature stays above the 100°C threshold over the modelled time,  
while for the strongest southward-oriented BHG, it is reached after about 8 years. After the sharp initial temperature drop at  
the production well, a very slow further temperature reduction is observed for the rest of the modelled time (Fig.8 d, g).

Introducing fault-parallel permeability anisotropy into the damage zone (Fig. 9), has the effect that the HDI becomes restricted  
380 almost entirely to the western damage zone, i.e., the part in which the wells are ~~plaeed~~ ~~situated~~. In the case in which a BHG is  
not applied (Fig. 9a), the HDI utilizes a large part of the damage zone, restricted to the south by the production well.  
Northwards-directed BHGs (Fig. 9b) produce a “fin”-like pattern within the modelled domain, i.e., the HDI extends from the  
production towards the injection well along the damage zone. High southward-~~directed~~s BHGs (Fig. 9c), in contrast, result in  
a small oblate HDI confined between production and injection wells. In terms of the temperature development (Fig. 9d), these  
385 patterns reflect different behaviours. The highest northwards-~~directed~~ BHG almost entirely hinders a temperature drop at the  
production well. On the contrary, the highest southwards-oriented BHG causes the production temperature to fall below the  
100°C threshold within 5 years. Stable temperatures at the production well are reached after about 10 years, independent of  
the BHG properties (Fig. 9).

When testing this setup for west- and eastward-~~directed~~ ~~s-oriented~~ BHGs, the production temperatures reached the 100°C limit  
390 very quickly and fell ~~below 100°C~~, ~~except with the exception of the~~ ~~for the~~ highest eastward-oriented BHG, within about 10  
years; ~~below 100°C~~ (Fig. 9g). The shape of the HDI is restricted to the width of the western damage zone. However, the N–S  
extent of the HDI varies in the vertical, along the fault plane. In case of westwards-oriented BHG, i.e., with the BHG ~~direction~~  
~~inline~~ ~~in line~~ with the dip direction of the fault, the N–S extension is wider at deeper levels and vice versa for eastwards-directed  
BHG (Fig. 9e–f). This observation reflects also in the potential lifetimes of the reservoirs (Fig. 9g), which show a wider spread  
395 with respect to the temperature development with comparable models without increased fault-parallel fracture anisotropy (Fig.  
8). Here the eastwards directed BHGs result in an improved lifetime that, for the highest eastward BHG, allow the production  
temperature to stay above the critical 100°C level.

#### 4 Discussion

Petrophysical properties, e.g., porosity and permeability, control the quality of a geothermal reservoir. However, these  
400 properties may vary significantly within a given volume. For instance, permeability is frequently observed to vary over several  
orders of magnitude (Heap et al., 2017; Kushnir, 2018; Manning and Ingebritsen, 1999); porosity may vary by 10 percent or  
more (e.g., Farrell et al., 2014; Heap et al., 2017; Kushnir, 2018; Zhang, 2013). The variability of these (~~Freudenthal, 1968;~~  
~~Krumbholz et al., 2014a~~) and other petrophysical parameters (~~Alava et al., 2009; Lobo-Guerrero and Vallejo, 2006~~) increases  
with scale (~~Alava et al., 2009; Freudenthal, 1968; Krumbholz et al., 2014a~~). In addition, their heterogeneous distribution and  
405 ~~their~~ property values are often anisotropic in terms of orientation, e.g., permeability caused by fractures often has a preferred  
orientation (e.g., Laubach et al., 2004; Marrett et al., 2007; Nelson, 1985; Watkins et al., 2018). To make a reliable prediction

Kommentiert [A54]: R1 – point 7.8

Kommentiert [A55]: R3 – point 2.21

of reservoir quality, it must first be determined to which accuracy these parameters must be known (Bauer et al., 2017; Bauer, 2018). The ranges of the parameter values we use in our modelling experiment for porosity, permeability, and fracture anisotropy are, for example, typical for sandstones, ~~for example,~~ in the Upper Rhine Graben (Germany; Fig. 10). Even in this comparatively small area, the porosity is reported to cover a range from close to zero to more than 25% (Bär, 2012; Bauer et al., 2017; Jodocy and Stober, 2011; Fig. 10a). The permeabilities determined for the same reservoir rocks range from about  $10^{-18} \text{ m}^2$  to  $10^{-11} \text{ m}^2$ , more than 7 orders of magnitude (Bär, 2012; Bauer et al., 2017; Jodocy and Stober, 2009, 2011; Stober and Bucher, 2014; Fig. 10b). Furthermore, permeability anisotropy in fracture networks can reach several orders of magnitude (e.g., Bense and Person, 2006; Caine and Forster, 1999; Jourde et al., 2002; Watkins et al., 2018).

With our simplified models, we systematically investigate the effects and the interplay of these important parameters on reservoir performance. In addition, we have taken into account the effects of the BHG.

Our experiments do not aim to describe a specific reservoir model, but rather to identify prime parameters in terms of geothermal reservoir performance and the accuracy to which they should be known. It was therefore important to keep some model parameters constant. Thus, the use of model parameters was a trade-off between values that lie in a realistic range, and values that allow comparison of the model results in the modelled time span. For this reason, we decided to assign a relatively low temperature of  $40^\circ\text{C}$  to the injected fluid and to use a fixed flow rate of  $75 \text{ l s}^{-1}$ . ~~The~~ This fixed flow rate of  ~~$75 \text{ l s}^{-1}$~~  used for the three different permeability scenarios leads to bottomhole pressures that vary from approximately 3800 MPa at  $k = 10^{-15} \text{ m}^2$ , over approximately 180 MPa at  $k = 10^{-13} \text{ m}^2$ , to 30 MPa at  $k = 10^{-11} \text{ m}^2$ . For low and intermediate permeabilities, these values exceed the lithostatic pressure at injection depth, which is about 80 MPa. In site-specific models, fluid pressures could be kept at sub-lithostatic values by adjusting the length of the well over which injection takes place, by reducing the flow rate, or by injecting the fluid at a greater depth.

#### 4.1 Porosity

Rock volumes constitute in many cases, especially in sedimentary rocks, dual porosity systems (Gringarten, 1984; Warren and Root, 1963) in which pore space and fractures are commonly fluid-filled. Since pore space often exceeds 15–20% (Heap et al., 2017; Zhang, 2013), and the pore fluid has a higher heat capacity than rock (rock  $\sim 700\text{--}1100 \text{ J kg}^{-1} \text{ K}^{-1}$  (Schärli and Rybach, 2001; Stober et al., 2017); water =  $4184 \text{ J kg}^{-1} \text{ K}^{-1}$ ), high porosity has a positive effect on the heat capacity of the reservoir. Our Scenario 1 concurs with this; high porosities have a positive effect on the lifetime of a geothermal reservoir. The size of this positive effect, however, varies largely according to the other parameters. For instance, in Scenario 1, the time that passes before the HDI reaches the production well ranges from decades to only a few years, in models in which porosity is the only varied parameter (Fig. 2c). Especially in the case of high permeability, i.e., exceeding a value of  $10^{-13} \text{ m}^2$ , often taken as the threshold for economical exploitation of a geothermal reservoir (Agemar et al., 2014; Stober et al., 2017), the effect of porosity on the lifetime of the reservoir is dramatically reduced.

**Kommentiert [A56]:** R2 – point 2.19  
No changes were made.

**Kommentiert [A57]:** R3 – point 2.23

**Kommentiert [A58]:** R3 – point 2.24

## 4.2 Permeability and hydraulic background gradient

440 The reason for these variations, and the predominantly subordinate role of porosity, is according to Scenario 1, provided by the interplay between permeability and the BHG (Fig. 2a–c). If permeability is high enough, the BHG controls shape, volume and propagation direction of the HDI during heat extraction. For permeabilities as low as  $10^{-15}$  m<sup>2</sup>, the BHG is outperformed by the artificial flow field caused by the very high bottomhole pressure. The result of this is that the HDI takes on a spherical shape and thus maximizes the exploited volume. This in consequence allows to maximize the “gain” from high porosity, i.e., high heat capacities, in a large rock volume. If, however, the permeabilities lie in a range suitable for geothermal energy

445 exploitation, i.e.,  $10^{-13}$  m<sup>2</sup> or higher, the necessary bottomhole pressure is decreased. Consequently, the artificial flow field is weaker and can be outperformed by the BHG. The higher the permeability, the larger the effect of the BHG, which ultimately causes an ellipsoidal HDI in an isotropic volume. In this case, direction and magnitude of the BHG thus become the controlling factors whether or not the HDI reaches the production well. Thus, [we show that](#) the BHG, which is rarely taken into account when it comes to predict the potential of geothermal reservoirs, ~~must be an~~ essential ~~part~~ in any exploration strategy.

450 The importance of these findings is shown by cases, such as the geothermal Hatchōbaru field in Japan (Bödvarsson and Tsang, 1982; DiPippo, 2005; Horne, 1982b). There, the injection- and the production wells were placed within a fault zone, resulting in good hydraulic connection. Moreover, the location of the wells was chosen in a way that the natural hydraulic background was oriented from the production to the injection well, to avoid early thermal breakthrough. Nevertheless, the artificially-introduced flow field was strong enough to outperform the BHG and the early drop in production temperature shows how

455 fragile such high permeable systems can be.

## 4.3 Permeability contrast

(Sub)horizontal permeability contrasts can be caused by layering in sedimentary rocks and can span several orders of magnitude (Zhang, 2013), [even though these sealing properties are altered or reduced by barren fractures](#). One example are clay layers that typically have permeabilities in the range of  $10^{-17}$  to  $10^{-23}$  m<sup>2</sup> (Neuzil, 1994) and therefore restrict fluid flow

460 across them, independent of their thickness (e.g., Bjørlykke et al., 1988; Moeck, 2014). However, permeability contrast can also be caused by diagenesis, i.e., ~~different some~~ sedimentary layers ~~have are~~ more ~~cementation-cemented~~ and thus ~~have a~~ lower matrix permeability. According to our models, in a rock volume with an overall permeability of  $10^{-13}$  m<sup>2</sup>, permeability contrasts between two layers, as low as 1 order of magnitude, will start to affect significantly the shape of the HDI (Fig. 4c). Confining layers that have a permeability between 2 and 3 orders of magnitude lower than the reservoir layer do not allow the

465 HDI to expand across them, leading to a exploitable reservoir volume that is layer-parallel, and consequently, has a ~~potential~~ drastically reduced volume (Fig. 4f, i). Notably, in the low and intermediate permeable models, where permeability contrasts are higher than ~~+2~~ order of magnitude, [high bottomhole pressures do not allow the BHG to affect the system, i.e. none](#) of the tested BHG configurations could compensate for the small volume (Fig. 4a, d). Only in the high permeable case, i.e., where

Kommentiert [A59]: R2 – point 2.20

Kommentiert [A60]: R1 – point 8.5

470 the reservoir layers have a permeability of  $10^{-11}$  m<sup>2</sup>, could a favourably-favourably-oriented BHG push the cold reinjected fluid away from the production well, providing therefore a potentially longer reservoir lifetime.

#### 4.4 Fracture anisotropy

475 The greater part of permeability in a sedimentary rock volume is typically provided by fractures and their networks (e.g., Bear, 1993; De Marsily, 1986; Hestir and Long: 1990; Nelson, 1985). Thus, a thorough understanding and prediction of this reservoir property constitutes a major requirement when planning a geothermal reservoir. While microcracks-small-scale\_fractures are commonly predictable, i.e., from borecore (e.g., Kranz, 1983; Krumbholz et al., 2014b; Vollbrecht et al., 1994), making assumptions about fractures at decimetre- and metre-scale, i.e., the fractures that principally control fluid flow, is difficult (e.g., Bauer et al., 2017; Bauer, 2018; Laubach et al., 2004). When considering the Cubic Law, a single fracture, if it is wide enough, can control the fluid flow in a reservoir (e.g., De Marsily, 1986; Nelson, 1985; Odling et al., 1999). In consequence, the prediction of fracture anisotropy at depth with the necessary accuracy is, at least, challenging and, at the most, impossible (e.g., 480 Laubach et al., 2004; Ortega and Marrett, 2000; Watkins et al., 2018). Our models show that a fracture anisotropy of 1 order of magnitude (Fig. 5b) can channel the fluid flow so efficiently that the HDI's propagation, in all other directions, is suppressed. If the anisotropy reaches just 2 orders of magnitude, which according to the literature (e.g., Bense and Person, 2006; Caine and Forster, 1999; Jourde et al., 2002; Watkins et al., 2018) must be considered to be a typical value, this suppression effect becomes saturated. In our models, even high BHGs cannot counteract this behaviour. According to our results, in this case, 485 the BHG can only effects the reservoir's lifetime when the BHG and fracture anisotropy are in\_line with the wells (Fig. 5a). The consequences are twofold: First, even comparatively low fracture anisotropy can hinder the establishment of a closed hydrothermal system. Second, fracture anisotropy in the range of 1 order of magnitude, with respect to the bulk permeability, leads to either very short- or long-lived geothermal reservoirs, depending on the BHG properties and the orientation of fracture anisotropy (Fig. 5a, b, c), BHG (Fig. 5b).

Kommentiert [A61]: R1 – point 8.6

Kommentiert [A62]: R2 – point 2.21

#### 490 4.5 Distance between wells

The distance between production and injection wells is the only parameter known to any accuracy. It is inherent that increasing distance between production and injection wells has a positive effect on the lifetime of a geothermal reservoir. However, precise site-specific estimation of this effect requires in-depth knowledge of highly heterogeneous parameters, such as permeability and porosity. Given that both wells need to be hydraulically connected, the distance has a disproportionally high impact (Fig. 3), since the volume, between the wells, grows cubically. Our models suggest that the achievable lifetime does not necessarily scale directly with the volume, because the HDI is the result of the complex interaction between permeability contrast, fracture anisotropy, and the BHG. Moreover, increasing the distance between production and injection well also reduces the chance of establishing a closed system. 495

Kommentiert [A63]: R3 – point 2.28

#### 4.6 Faulted reservoirs

500 Faults have been recently the focus of many studies of the economical exploitation of geothermal energy. The main reason for this is that fault damage zones promise significantly increased permeabilities (e.g., Bense et al., 2013; Caine et al., 1996; Caine and Forster, 1999; Sibson, 1977), and can provide positive temperature anomalies (Sanjuan et al., 2014; Vidal and Genter, 2018). The typical characteristics of fault zones thus increase the chance of high production rates of hot fluid, good hydraulic connection between injection and production wells and this is potentially further improved by the often-observed fault-parallel fracture anisotropy within the damage zone, which is often (sub)parallel to the fault. (e.g., Bense et al., 2013; Caine et al., 1996; Faulkner et al., 2010; Shipton and Cowie, 2003). However, a number of critical studies exists (e.g., Bakhsh et al., 2016; Bauer et al., 2017; Bauer, 2018; Biemans, 2014; Diaz et al., 2016; Loveless et al., 2014) that discuss the risk and difficulties of exploring and exploiting fault zones as geothermal reservoirs. The two main concerns reported are that first a fault's architecture at reservoir depth is, due to the heterogeneous nature of rocks, and, in particular, that of the faults, difficult to predict, i.e., exploration risk increases with complexity and heterogeneity of the envisaged reservoir (e.g., Bauer 2018; Bauer et al., 2018; Loveless et al., 2014). The second concern is directly correlated to the expected high permeability that makes a fault a prime target in geothermics. This is because localized high permeabilities are expected to lead to channelling effects, i.e., the geothermal reservoir potentially becomes restricted to the fault zone (e.g., Biemans, 2014; Bakhsh et al., 2016; Moeck, 2014). Thus, the exploitation of fault zones constitutes a trade-off between high permeability and reduced reservoir volumes.

515 Our simplified models support these findings and show that faults, with damage zones that constitute positive permeability contrasts of just 2 orders of magnitude, already exhibit these channelling effects (Fig. 6). In these cases, the shape of the HDI is almost entirely described by the extent of the damage zone. In most investigated cases, this limitation of reservoir volume quickly leads to a sharp drop in production temperature, i.e., in most configurations, the temperature falls below the 100°C threshold within in a few years (Figs. 6, 8). This fast depletion of such a fault-related reservoir is further accelerated if the hydraulic connection between production and injection wells is improved by fracture anisotropy, which is often parallel to the fault (e.g., Bense et al., 2013; Caine et al., 1996; Faulkner et al., 2010; Shipton and Cowie, 2003; Figs. 7 and 9).

520 However, the most promising configurations that allowed for longevity of fault-related reservoirs are those with a high, fault-parallel, BHG that leads directly from the production well to the injection well (e.g., Figs. 6b, d, 7b, d). Interestingly, for a BHG normal to the strike of the fault, we also observe different reservoir lifetimes combined with a consequence of differently shaped HDIs. We observed that, when the BHG is oriented directed against opposed to the dip direction of a fault, the fault can be considered a more sustainable target for geothermal exploitation than a BHG oriented in the dip opposite direction in the opposite direction (Figs. 7e, f, 8e, f). We argue that in the first case, the BHG works against gravity in the fault zone, which slows the propagation of the HDI down, while in the opposing case, the BHG is supported by gravity and the progression of the HDI, and, in consequence, the depletion of the reservoir, is accelerated.

Kommentiert [A64]: R3 – point 2.29

Kommentiert [A65]: R3 – point 2.30

Kommentiert [A66]: R2 – point 2.22

Kommentiert [A67]: R2 – point 2.23

Kommentiert [A68]: R2 – point 2.24



However, our models are still simplistic and the next steps of investigation should study how the channelling effect is altered as the permeability contrast between the fault zone and host rock increases, i.e., whether there is a transition zone of significant width between the low and high permeable zones.

Another question that needs to be addressed when exploring fault-hosted or fractured reservoirs - is replenishment due to convective heat transport along the fault zone, as reported for numerous thermal anomalies in the upper Rhine Graben (e.g., Sanjuan et al., 2014; Vidal and Genter, 2018). This point, often taken as an argument in favour of fault-related geothermal reservoirs, is not part of our study. Nevertheless, our results can help to constrain the observed channelling effects and therefore how high the replenishment rates in such reservoirs must be in order to counteract this.

## 5 Conclusions

We used a large series of over one thousand numerical experiments to systematically investigate the effect of a number of parameters, e.g., permeability, porosity, on the potential and lifetime of a geothermal reservoir. We varied the reservoir parameters within realistic ranges and applied BHGs of different orientations and magnitudes. From the results of our numerical sensitivity study, we conclude:

1. That permeability, permeability heterogeneity, and fracture anisotropy together with the BHG are the critical parameters that affect the lifetime of a geothermal reservoir.
2. While high permeability is an asset for the exploitation of geothermal energy, our experiments demonstrate that it also comes with a risk. On the one hand, high permeabilities are needed to generate sufficient flow rates. On the other hand, high permeabilities in general, and in particular localized high permeability, such as in layered sedimentary systems, in fractures, and especially in fault damage zones, channel fluid flow and strongly restrict the size of the geothermal reservoir that can be utilized.
3. Typically, geothermal energy production aims to establish a closed system. This is, according to our models, not trivial and depends strongly on permeability, permeability heterogeneity, the internal structure of the reservoir, and the BHG. This is especially true if the permeability is high ( $>= 10^{-13} \text{ m}^2$ ), i.e., values that are desired usually for geothermal reservoirs.
4. Our models imply that, in many cases, the positive effect of porosity has on heat capacity and thus on the reservoir lifetime, is minor subsidiary, compared to that effects of permeability and BHG in many cases, porosity is of minor importance, compared with that of permeability and BHG; its the impact of porosity decreases as permeability increases.
5. Due to the heterogeneous nature of rocks and fracture systems, it is, in general, difficult to predict the lifetime of a geothermal system. This holds especially true even if the required conditions for permeability are met or even exceeded and a BHG exists, because the BHG determines the shape and propagation direction of the HDI. Therefore, the uncertainty in estimating the lifetime inevitably increase.

**Kommentiert [A69]:** R3 – point 2.31  
No changes made

**Kommentiert [A70]:** R1 – point 2.1, 7.4, 7.6  
R3 – point 2.30

**Kommentiert [A71]:** R2 – point 2.25

**Kommentiert [A72]:** R2 – point 2.26

565 Our results show that parameters, such as permeability and the BHG, can have unforeseeable large effect on the lifetime of geothermal system. Thus, our findings provide an important step forward in judging which parameters must be known and to which degree they must be known to make site-specific models as reliable and accurate as possible in the future.

Kommentiert [A73]: R2 – point 2.27

#### Data availability

All data analysed in this study are presented in the manuscript.

#### **Author contribution**

570 JFB and MK contributed equally to the manuscript. The model experiments were designed by JFB, MK, and EL. Results were discussed by all authors. MK, JFB, EL, and DCT wrote the manuscript. JFB, MK, and EL prepared figures. All authors commented, read, and approved the final manuscript.

#### **Competing interests**

575 The authors of this manuscript declare that they do not have any conflict of interest.

#### Acknowledgments

We thank our colleagues, Hans Ruppert, Klaus Wemmer, Jonas Kley, and Nicole Nolte for their support. We also thank Federico Rossetti, two anonymous reviewers, and Owen Callahan for their comments that helped improve our manuscript.

#### **References**

580 Alava, M. J., Nukala, P. K. V. V., and Zapperi, S.: Size effects in statistical fracture, *J. Phys. D: Appl. Phys.*, 42, 21, <https://doi.org/10.1088/0022-3727/42/21/214012>, 2009.

Agemar, T., Weber, J., and Schulz, R.: Deep geothermal energy production in Germany, *Energies*, 7, 4397–4416, <https://doi.org/10.3390/en7074397>, 2014.

585 Aragón-Aguilar, A., Izquierdo-Montalvo, G., López-Blanco, S., and Arellano-Gómez, V.: Analysis of heterogeneous characteristics in a geothermal area with low permeability and high temperature, *Geosci. Front.*, 8, 1039–1050, <https://doi.org/10.1016/j.gsf.2016.10.007>, 2017.

Kommentiert [A74]: R3 – point 2.33

[Bachu, S.: Synthesis and model of formation-water flow, Alberta Basin, Canada, AAPG Bulletin, 79, 1159-1178, 1995.](#)

Bakhsh, K.J., Nakagawa, M., Arshad, M., Dunnington, L.: Modelling thermal breakthrough in sedimentary geothermal systems, using COMSOL Multiphysics, Proceedings, 41st Workshop on Geothermal Reservoir Engineering, Stanford, California, 22–24 February 2016, SGP-TR-209, 2016.

Bär, K.: Untersuchung der tiefeingeothermischen Potenziale von Hessen, Ph.D. thesis, Technische Universität Darmstadt, Germany, 297 pp., available at: <http://tuprints.ulb.tu-darmstadt.de/3067/>, 2012.

Bauer, J. F., Krumbholz, M., Meier, S., and Tanner, D. C.: Predictability of properties of a fractured geothermal reservoir: The opportunities and limitations of an outcrop analogue study, *Geothermal Energy*, 5, 24, <https://doi.org/10.1186/s40517-017-0081-0>, 2017.

Bauer, J. F.: On the significance and predictability of geological parameters in the exploration for geothermal energy, Ph.D. thesis, Georg-August-Universität Göttingen, Germany, 162 pp., available at: <http://hdl.handle.net/11858/00-1735-0000-002E-E3D2-2>, 2018.

~~Beall, J. J., Adams, M. C., and Hirtz, P. N.: R-13 tracing of injection in The Geysers, Geothermal Resources Council Transactions, 18, 151–159, 1994.~~

[Bear, J.: Dynamics of Fluids in Porous Media, American Elsevier Pub. Co, 764 pp., 1972.](#)

Bear, J.: Modelling flow and contaminant transport in fractured rocks, in: Flow and contaminant transport in fractured rock, edited by: Bear, J., Tsang, C. F., and De Marsily, G., Academic Press, New York, 1–37, 1993.

[Bellman, R. E.: Dynamic programming. Dover Publications, New York, 366 pp., 2003.](#)

Bense, V. F., and Person, M. A.: Faults as conduit-barrier systems to fluid flow in siliciclastic sedimentary aquifers, *Water Resour. Res.*, 42, W05421, <http://dx.doi.org/10.1029/2005wr004480>, 2006.

Bense, V. F., Gleeson, T., Loveless, S. E., Bour, O., and Scibek, J.: Fault zone hydrogeology, *Earth Sci. Rev.*, 127, 171–192, <https://doi.org/10.1016/j.earscirev.2013.09.008>, 2013.

[Berkowitz, B., Bear, J., Braester, C.: Continuum models for contaminant transport in fractured porous formations. Water Resources Research, 24, 1225-1236, http://dx.doi.org/10.1029/WR024i008p01225, 1988.](#)

[Bhatia, S. C.: Geothermal power generation, in: Advanced renewable energy systems, edited by: Bhatia, S. C., Woodhead Publishing India, 334-388, https://doi.org/10.1016/B978-1-78242-269-3.50014-0, 2014.](#)

Biemans, B. C. B.: The influence of fractures on geothermal heat production in the Roer Valley Graben, M.S. thesis, Delft University of Technology, The Netherlands, 130 pp, 2014.

Birner, J., Bartels, J., Schlagermann, P., Mergner, H., and Wolfgram, M.: Dichte, Viskosität und Wärmekapazität hochmineralisierter Thermalwässer in Abhängigkeit von Druck, Temperatur und Gesamtlösungsinhalt, bbr-Sonderheft Geothermie, 63, 90-97, 2013

Bjørlykke, K., Mo, A., and Palm, E.: Modelling of thermal convection in sedimentary basins and its relevance to diagenetic reactions, *Mar. Pet. Geol.*, 5, 338-351, [https://doi.org/10.1016/0264-8172\(88\)90027-X](https://doi.org/10.1016/0264-8172(88)90027-X), 1988.

Kommentiert [A75]: R3 – point 2.7

Bödvarsson, G. S., and Tsang, C. F.: Injection and thermal breakthrough in fractured geothermal reservoirs, *J. Geophys. Res. Solid Earth*, 87, 1031–1048, <https://doi.org/10.1029/JB087iB02p01031>, 1982.

[Buness, H., Hartmann, H., Rumpel, H. M., Beielecke, T., Musmann, P., Schulz, R.: Seismic exploration of deep hydrogeothermal reservoirs in Germany, in: Proceedings World Geothermal Congress, Bali, Indonesia, 25-29 April 2010.](#)

625 Caine, J. S., Evans, J. P., and Forster, C. B.: Fault zone architecture and permeability structure, *Geology*, 24, 1025–1028, [https://doi.org/10.1130/0091-7613\(1996\)024<1025:FZAAPS>2.3.CO;2](https://doi.org/10.1130/0091-7613(1996)024<1025:FZAAPS>2.3.CO;2), 1996.

Caine, J. S., and Forster, C. B.: Fault zone architecture and fluid flow: Insights from field data and numerical modeling, in: *Faults and subsurface fluid flow in the shallow crust*, edited by: Haneberg, W. C., Mozley, P. S., Moore, J. C., and Goodwin, L. B., AGU, Washington DC, 101–127, <https://doi.org/10.1029/GM113p0101>, 1999.

630 [COMSOL Multiphysics® v. 5.0. www.comsol.com. COMSOL AB, Stockholm, Sweden.](#)

[COMSOL: Heat transfer module, user's guide, https://doc.comsol.com/5.3/doc/com.comsol.help.heat/HeatTransferModuleUsersGuide.pdf, 2017.](#)

[COMSOL: Subsurface flow module, user's guide \(Darcy's flow\), https://doc.comsol.com/5.4/doc/com.comsol.help.ssf/SubsurfaceFlowModuleUsersGuide.pdf, 2018.](#)

635 De Marsily, G.: *Quantitative hydrogeology: Groundwater hydrology for engineers*, 1st ed., Acad. Press, New York, 434 pp., 1986.

Diaz, A. R., Kaya, E., and Zarrouk, S. J.: Reinjection in geothermal fields – A worldwide review update, *Renewable Sustainable Energy Rev.*, 53, 105–162, <https://doi.org/10.1016/j.rser.2015.07.151>, 2016.

DiPippo, R.: *Geothermal power plants: Principles, applications and case studies*, 1st ed., Elsevier Science, Oxford, 450 pp., 2005.

640 [EREC \(European Renewable Energy Council\): Renewable energy in Europe: Building markets and capacity, 1st ed., James and James, London, UK, 202 pp., 2004.](#)

[Evans, J.P., Forster, C. B., Goddard, J. V.: Permeability of fault-related rocks, and implications for hydraulic structure of fault zones, J. Struct. Geol., 19, 1393-1404, https://doi.org/10.1016/S0191-8141\(97\)00057-6, 1997.](#)

645 [Erdwerk: https://www.erdwerk.com/en/trebur, last access: 11.09.2019.](#)

[Fan, Y., Li, H., & Miguez-Macho, G.: Global patterns of groundwater table depth, Science, 339, 940–943, https://doi.org/10.1126/science.1229881, 2013.](#)

Farrell, N. J. C., Healy, D., and Taylor, C. W.: Anisotropy of permeability in faulted porous sandstones, *J. Struct. Geol.*, 63, 50–67, <https://doi.org/10.1016/j.jsg.2014.02.008>, 2014.

650 Faulkner, D. R., Jackson, C. A. L., Lunn, R. J., Schlische, R. W., Shipton, Z. K., Wibberley, C. A. J., and Withjack, M. O.: A review of recent developments concerning the structure, mechanics and fluid flow properties of fault zones, *J. Struct. Geol.*, 32, 1557–1575, <https://doi.org/10.1016/j.jsg.2010.06.009>, 2010.

[Freeze, R. A., and Cherry, J. A.: Groundwater, 1st ed., Prentice-Hall, USA, 604 pp., 1979](#)

- 655 Freudenthal, A. M.: Statistical approach to brittle fracture, in: *Fracture, an advanced treatise*, 2nd ed., edited by: Liebowitz, H., Academic Press, 591–619, 1968.
- Garven, G.: Continental-Scale Groundwater Flow and Geologic Processes, in: *Recent Trends in Hydrogeology*, *Annu. Rev. Earth Planet. Sci.*, 23, 89–117, <https://doi.org/10.1146/annurev.ea.23.050195.000513>, 1995.
- [Gleeson, T., Befus, K. M., Jasechko, S., Luijendijk, E., & Cardenas, M. B.: The global volume and distribution of modern groundwater, \*Nat. Geosci.\*, 9, 161–167, <https://doi.org/10.1038/ngeo2590>, 2016.](#)
- 660 Gringarten, A. C.: Interpretation of tests in fissured reservoirs and multilayered reservoirs with double porosity behavior: theory and practice, *J. Petrol. Technol.*, 36, 549–605, <https://doi.org/10.2118/10044-PA>, 1984.
- Heap, M. J., Kushnir, A. R. L., Gilg, H. A., Wadsworth, F. B., Reuschlé, T., and Baud, P.: Microstructural and petrophysical properties of the Permo-Triassic sandstones (Buntsandstein) from the Soultz-sous-Forêts geothermal site (France), *Geothermal Energy*, 5, 26, <https://doi.org/10.1186/s40517-017-0085-9>, 2017.
- 665 Hestir, K., and Long, J. C. S.: Analytical expressions for the permeability of random two-dimensional Poisson fracture networks based on regular lattice percolation and equivalent media theories, *J. Geophys. Res. Solid Earth*, 95, 21565–21581, <https://doi.org/10.1029/JB095iB13p21565>, 1990.
- [Hochstein, M.P.: Assessment and modelling of geothermal reservoirs \(small utilization schemes\), \*Geothermics\* 17, 15-49, \[https://doi.org/10.1016/0375-6505\\(88\\)90004-1\]\(https://doi.org/10.1016/0375-6505\(88\)90004-1\), 1988.](#)
- 670 Horne, R. N.: Effects of water injection into fractured geothermal reservoirs: A summary of experience worldwide, Stanford Geothermal Program, Interdisciplinary Research in Engineering and Earth Sciences, Stanford University, Stanford, California, Technical Report, <https://doi.org/10.2172/860855>, 1982a.
- Horne, R. N.: Geothermal reinjection experience in Japan, *J. Petrol. Tech.*, 34, 495–405, <https://doi.org/10.2118/9925-PA>, 1982b.
- 675 Huenges, E.: *Geothermal energy systems: Exploration, development, and utilization*, 1st ed., Wiley-VCH Verlag GmbH & Co. KGaA, Weinheim, 463 pp., 2010.
- [Ingebritsen, S. E., Sanford, W. E., & Neuzil, C. E.: \*Groundwater in geologic processes\*, 2nd ed., Cambridge Univ. Press, 564 pp., 2006.](#)
- [iTG: https://www.tiefengeothermie.de](https://www.tiefengeothermie.de), last access: 11-09-2019.
- 680 Jodocy, M., and Stober, I.: Geologisch-geothermische Tiefenprofile für den südwestlichen Teil des Süddeutschen Molassebeckens, *Z. Dtsch. Geol. Ges.*, 160, 359–366, <https://doi.org/10.1127/1860-1804/2009/0160-0359>, 2009.
- Jodocy, M., and Stober, I.: Porositäten und Permeabilitäten im Oberrheingraben und südwestdeutschen Molassebecken, *Erdöl, Erdgas, Kohle*, 127, 20–27, 2011.
- 685 Jourde, H., Flodin, E. A., Aydin, A., Durlafsky, L. J., and Wen, X. H.: Computing permeability of fault zones in eolian sandstone from outcrop measurements, *AAPG Bull.*, 86, 1187–1200, <https://doi.org/10.1306/61EEDC4C-173E-11D7-8645000102C1865D>, 2002.

Kranz, R. L.: Microcracks in rocks: A review, *Tectonophysics*, 100, 449–480, [https://doi.org/10.1016/0040-1951\(83\)90198-1](https://doi.org/10.1016/0040-1951(83)90198-1), 1983.

690 Krumbholz, M., Hieronymus, C. F., Burchardt, S., Troll, V. R., Tanner, D. C., and Friese, N.: Weibull-distributed dyke thickness reflects probabilistic character of host-rock strength, *Nat. Commun.*, 5, 3272, <https://doi.org/10.1038/ncomms4272>, 2014a.

Krumbholz, M., Vollbrecht, A., and Aschoff, M.: Recent horizontal stress directions in basement rocks of southern Sweden deduced from open microcracks, *J. Struct. Geol.*, 65, 33–43, <https://doi.org/10.1016/j.jsg.2014.03.006>, 2014b.

695 Kushnir, A. R. L., Heap, M. J., and Baud, P.: Assessing the role of fractures on the permeability of the Permo-Triassic sandstones at the Soultz-sous-Forêts (France) geothermal site, *Geothermics*, 74, 181–189, <https://doi.org/10.1016/j.geothermics.2018.03.009>, 2018.

Laubach, S. E., Olson, J. E., and Gale, J. F. W.: Are open fractures necessarily aligned with maximum horizontal stress?, *Earth Planet. Sci. Lett.*, 222, 191–195, <https://doi.org/10.1016/j.epsl.2004.02.019>, 2004.

700 Laubach, S. E., Olson, J. E., and Gross, M. R.: Mechanical and fracture stratigraphy, *AAPG Bull.*, 93, 1413–1426, <https://doi.org/10.1306/07270909094>, 2009.

Laubach, S. E., Eichhubl, P., Hargrove, P., Ellis, M. A., and Hooker, J. N.: Fault core and damage zone fracture attributes vary along strike owing to interaction of fracture growth, quartz accumulation, and differing sandstone composition, *J. Struct. Geol.*, 68, 207–226, <https://doi.org/10.1016/j.jsg.2014.08.007>, 2014.

[Lee, C. H., and Farmer, I.: Fluid flow in discontinuous rocks, Chapman and Hall, London, 170 pp., 1993.](#)

705 [Lobo-Guerrero, S., Vallejo, L. E.: Application of weibull statistics to the tensile strength of rock aggregates, \*Journal of Geotechnical and Geoenvironmental Engineering\*, 132, 6, \[https://doi.org/10.1061/\\(ASCE\\)1090-0241\\(2006\\)132:6\\(786\\)\]\(https://doi.org/10.1061/\(ASCE\)1090-0241\(2006\)132:6\(786\)\), 2006.](#)

[Lopez, D. L., and Smith, L.: Fluid flow in fault zones: Influence of hydraulic anisotropy and heterogeneity on the fluid flow and heat transfer regime, \*Water Resour. Res.\*, 32, 3227-3235, <https://doi.org/10.1029/96WR02101>, 1996.](#)

710 Loveless, S., Pluymaekers, M., Lagrou, D., De Boever, E., Doornenbal, H., Laenen, B.: Mapping the geothermal potential of fault zones in the Belgium-Netherlands border region, *Energy Procedia*, 59, 351–358, <https://doi.org/10.1016/j.egypro.2014.10.388>, 2014

MacDonald, P., Stedman, A., and Symons, G.: The UK geothermal hot dry rock R&D programme, *Proceedings, Seventeenth Workshop on Geothermal Reservoir Engineering, Stanford University, Stanford, California, 29–31 January 1992, SGP-TR-141*, 1992.

715 Manning, C. E., and Ingebritsen, S. E.: Permeability of the continental crust: Implications of geothermal data and metamorphic systems, *Rev. Geophys.*, 37, 127–150, <https://doi.org/10.1029/1998RG900002>, 1999.

Marrett, R., Laubach, S. E., and Olson, J. E.: Anisotropy and beyond: Geologic perspectives on geophysical prospecting for natural fractures, *The Leading Edge*, 26, 1106–1111, <https://doi.org/10.1190/1.2780778>, 2007.

720 [Mergner, H., Eggeling, L., Kölbel, T., Münch, W., Genter, A.: Geothermische Stromerzeugung: Bruchsal und Soultz-sous-Forêts, \*mining+geo\*, 4, 2012.](#)

Moeck, I. S.: Catalog of geothermal play types based on geologic controls, *Renewable Sustainable Energy Rev.*, 37, 867–882, <https://doi.org/10.1016/j.rser.2014.05.032>, 2014.

Nelson, R. A.: Geologic analysis of naturally fractured reservoirs, 1st ed., *Contributions in Petroleum Geology and Engineering*, edited by: Chilingar G. V., Gulf Publishing Company, Houston, Texas, 320 pp., 1985.

725 Neuzil, C. E.: How permeable are clays and shales?, *Water Resour. Res.*, 30, 145–150, <https://doi.org/10.1029/93WR02930>, 1994.

Ocampo, J., Pelayo, A., De Leon, J., Goyal, K., and Box, T.: Reservoir characteristic obtained from steam decline trends in the Cerro Prieto geothermal field, *Proceedings, Twenty-Third Workshop on Geothermal Reservoir Engineering*, Stanford University, Stanford, California, 26–28 January 1998, SGP-TR- 158, 1998.

730 Odling, N. E., Gillespie, P., Bourgin, B., Castaing, C., Chiles, J. P., Christensen, N. P., Fillion, E., Genter, A., Olsen, C., Thrane, L., Trice, R., Aarseth, E., Walsh, J. J., and Watterson, J.: Variations in fracture system geometry and their implications for fluid flow in fractured hydrocarbon reservoirs, *Pet. Geosci.*, 5, 373–384, <https://doi.org/10.1144/petgeo.5.4.373>, 1999.

Ortega, O., and Marrett, R.: Prediction of macrofracture properties using microfracture information, *Mesaverde Group sandstones, San Juan basin, New Mexico*, *J. Struct. Geol.*, 22, 571–588, [https://doi.org/10.1016/S0191-8141\(99\)00186-8](https://doi.org/10.1016/S0191-8141(99)00186-8), 2000.

735 Parini, M., Acuna, J. A., and Laudiano, M.: Reinjecting water return at Miravalles geothermal reservoir, Costa Rica: numerical modelling and observations, *Proceedings, Twenty-First Workshop on Geothermal Reservoir Engineering*, Stanford University, Stanford, California, 22–24 January 1996, SGP-TR-151, 1996.

740 [Ran, Q., Wang, Y., Sun, Y., Yan, L., Tong, M.: Volcanic gas reservoir characterization. Gulf Professional Publishing, 604 pp., 2014.](#)

[Sanjuan, B., Millot, R., Innocent, C. H., Dezayes, C. H., Scheiber, J., and Brach, M.: Major geochemical characteristics of geothermal brines from the Upper Rhine Graben granitic basement with constraints on temperature and circulation, \*Chemical Geology\*, 428, 27–47, <https://doi.org/10.1016/j.chemgeo.2016.02.021>, 2016.](#)

745 [Schärli, U., and Rybach, L.: Determination of specific heat capacity on rock fragments, \*Geothermics\*, 30, 93–110, \[https://doi.org/10.1016/S0375-6505\\(00\\)00035-3\]\(https://doi.org/10.1016/S0375-6505\(00\)00035-3\), 2001.](#)

Seeburger, D. A., and Zoback, M. D.: The distribution of natural fractures and joints at depth in crystalline rock, *J. Geophys. Res. B: Solid Earth*, 87, 5517–5534, <https://doi.org/10.1029/JB087iB07p05517>, 1982.

[Shipton, Z. K., Evans, J. P., Robeson, K. R., Forster, C. B., and Snelgrove, S.: Structural heterogeneity and permeability in faulted eolian sandstone: Implications for subsurface modeling of faults, \*AAPG Bulletin\*, 86, 863–883, <https://doi.org/10.1306/61EEDBC0-173E-11D7-8645000102C1865D>, 2002.](#)

750 Shipton, Z. K., and Cowie, P. A.: A conceptual model for the origin of fault damage zone structures in high-porosity sandstone, *J. Struct. Geol.*, 25, 333–344, [https://doi.org/10.1016/S0191-8141\(02\)00037-8](https://doi.org/10.1016/S0191-8141(02)00037-8), 2003.

755 Sibson, R.—H.: Fault rocks and fault mechanisms, *Journal of the Geological Society*, 133, 191–213,  
<https://doi.org/10.1144/gsjgs.133.3.0191>, 1977.

~~Schärli, U., and Rybach, I.: Determination of specific heat capacity on rock fragments, *Geothermics*, 30, 93–110,  
[https://doi.org/10.1016/S0375-6505\(00\)00035-3](https://doi.org/10.1016/S0375-6505(00)00035-3), 2001~~

Simms, M. A., and Garven, G.: Thermal convection in faulted extensional sedimentary basins: theoretical results from finite-  
element modeling, *Geofluids*, 4, 109–130, <https://doi.org/10.1111/j.1468-8115.2004.00069.x>, 2004.

760 Snow, D. T.: Rock fracture spacings, openings, and porosities, *Journal of the Soil Mechanics and Foundations Division*, 94,  
73–92, 1968.

Stober, I., and Bucher, K.: Hydraulic and hydrochemical properties of deep sedimentary reservoirs of the Upper Rhine Graben,  
Europe, *Geofluids*, 15, 464–482, <https://doi.org/10.1111/gfl.12122>, 2014.

765 Stober, I., Fritzer, T., Obst, K., Agemar, T., and Schulz, R.: *Deep Geothermal Energy – Principles and Application Possibilities  
in Germany*, edited by Weber, J., Moeck, I., Leibniz Institute for Applied Geophysics (LIAG), Hannover, 88 pp., 2017.

Tenma, N., Yamaguchi, T., and Zylvoski, G.: The Hijiori Hot Dry Rock test site, Japan: Evaluation and optimization of heat  
extraction from a two-layered reservoir, *Geothermics*, 37, 19–52, <https://doi.org/10.1016/j.geothermics.2007.11.002>, 2008.

Tiab, D., and Donaldson, E. C.: *Petrophysics, theory and practice of measuring reservoir and fluid transport properties*, Gulf  
Professional Publishing, New York, 880 pp., 2004.

770 Van Golf-Racht, T. D.: *Fundamentals of fractured reservoir engineering*, Elsevier Scientific Publishing Company, New York,  
732 pp., 1982.

[Vidal, J., and Genter, A.: Overview of naturally permeable fractured reservoirs in the central and southern Upper Rhine Graben:  
insights from geothermal wells, \*Geothermics\*, 74, 57–73, <https://doi.org/10.1016/j.geothermics.2018.02.003>, 2018.](https://doi.org/10.1016/j.geothermics.2018.02.003)

775 Vollbrecht, A., Dürrast, H., Kraus, J., and Weber, K.: Paleostress directions deduced from microcrack fabrics in KTB core  
samples and granites from the surrounding field, *Sci. Drill.*, 4, 233–241, 1994.

Warren, J. E., and Root, P. J.: The behavior of naturally fractured reservoirs, *Society of Petroleum Engineers*, 3, 245–255,  
<https://doi.org/10.2118/426-pa>, 1963.

780 Watkins, H., Healy, D., Bond, C. E., and Butler, R. W. H.: Implications of heterogeneous fracture distribution on reservoir  
quality; an analogue from the Torridon Group sandstone, Moine Thrust Belt, NW Scotland, *J. Struct. Geol.*, 108, 180–197,  
<https://doi.org/10.1016/j.jsg.2017.06.002>, 2018.

Zhang, L.: Aspects of rock permeability, *Frontiers of Structural and Civil Engineering*, 7, 102–116,  
<https://doi.org/10.1007/s11709-013-0201-2>, 2013.




790


795

**Table 1: Material properties used for all models. The rock and fluid properties are oriented on Triassic Buntsandstein sandstone and a geothermal brine, respectively. Rock properties are adopted from Bär (2012), the fluid properties are typical for geothermal brine at 100°C (e.g., Birner et al., 2013; Stober et al., 2017).**

800


parameter	symbol	value	unit
fluid properties			
density	$\rho$	1100	kg m <sup>-3</sup>
heat capacity	$c_p$	4200	J kg <sup>-1</sup> K <sup>-1</sup>
thermal conductivity	$\kappa$	0.6	W m <sup>-1</sup> K <sup>-1</sup>
viscosity	$\mu$	0.0002	Pa s
rock properties			
density	$\rho$	2400	kg m <sup>-3</sup>
heat capacity	$c_p$	670	J kg <sup>-1</sup> K <sup>-1</sup>
thermal conductivity	$k$	2.6	W m <sup>-1</sup> K <sup>-1</sup>

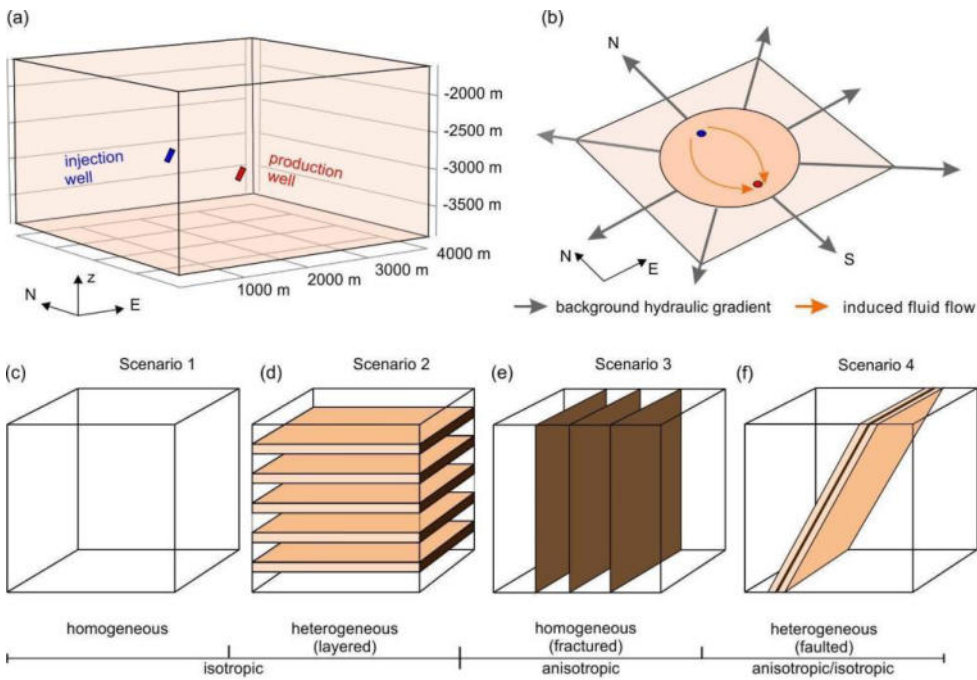


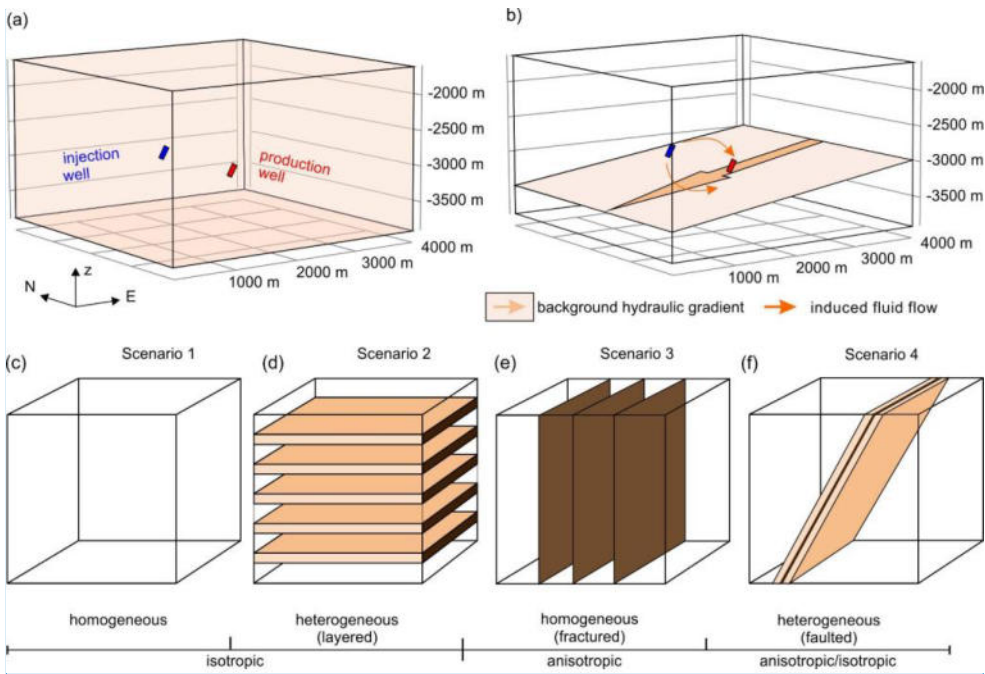

Kommentiert [A76]: R1 – point 6.7

805 Fig. 1. Model setup used in our study. (a) the rectangular cuboid model lies at a depth between 1600 and 3900 m and has side lengths  
of 4000 m. Injection- and production wells are 1500 m apart. (b) shows one example of an westward directed BHG, in addition, BHGs  
of different orientations and magnitudes (0, 1, 5, and 20  $\text{mm}\cdot\text{m}^{-3}$ ) were applied. (c-f) show sketches of the different scenarios  
810 investigated, comprising of reservoirs that are (c) homogeneous, (d) horizontally layered, (e) include vertical fracture anisotropy, and  
(f) a 60° west-dipping fault zone that consists of a damage zone, with and without a fault core, and with and without fracture  
anisotropy in the damage zone. Modified after Bauer (2018).

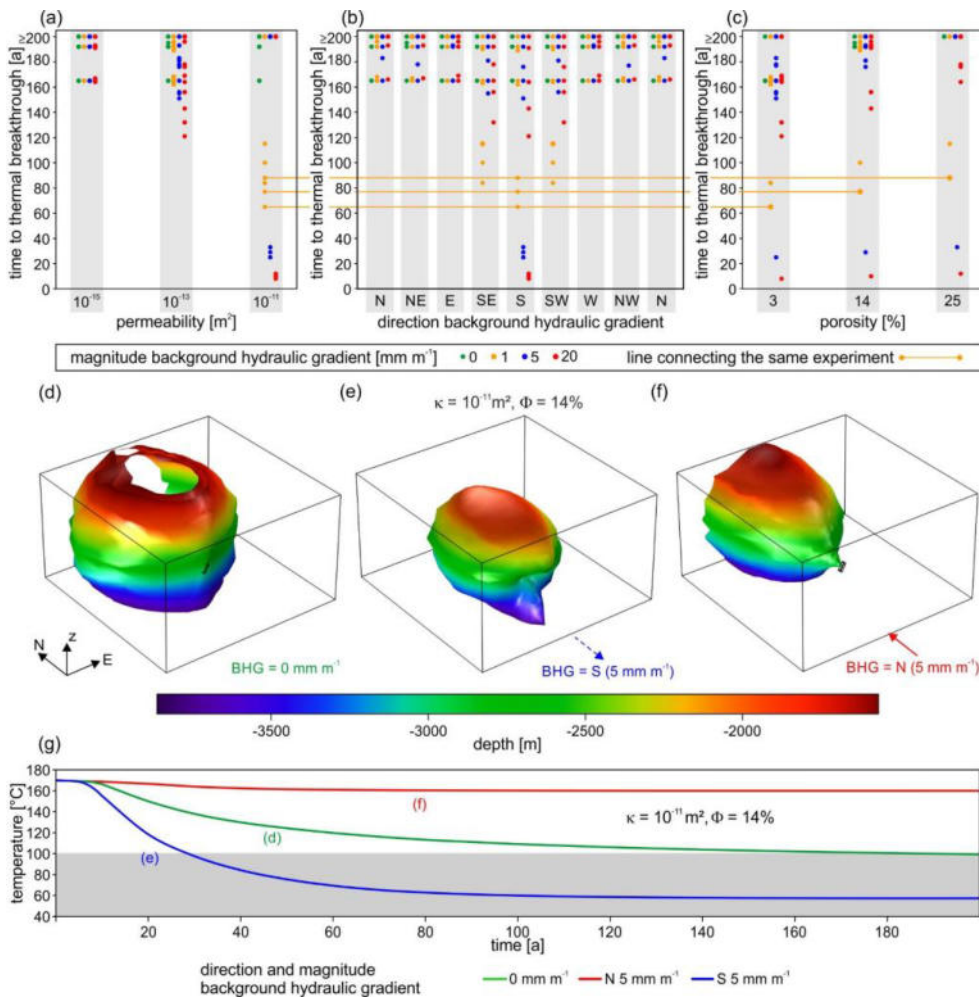

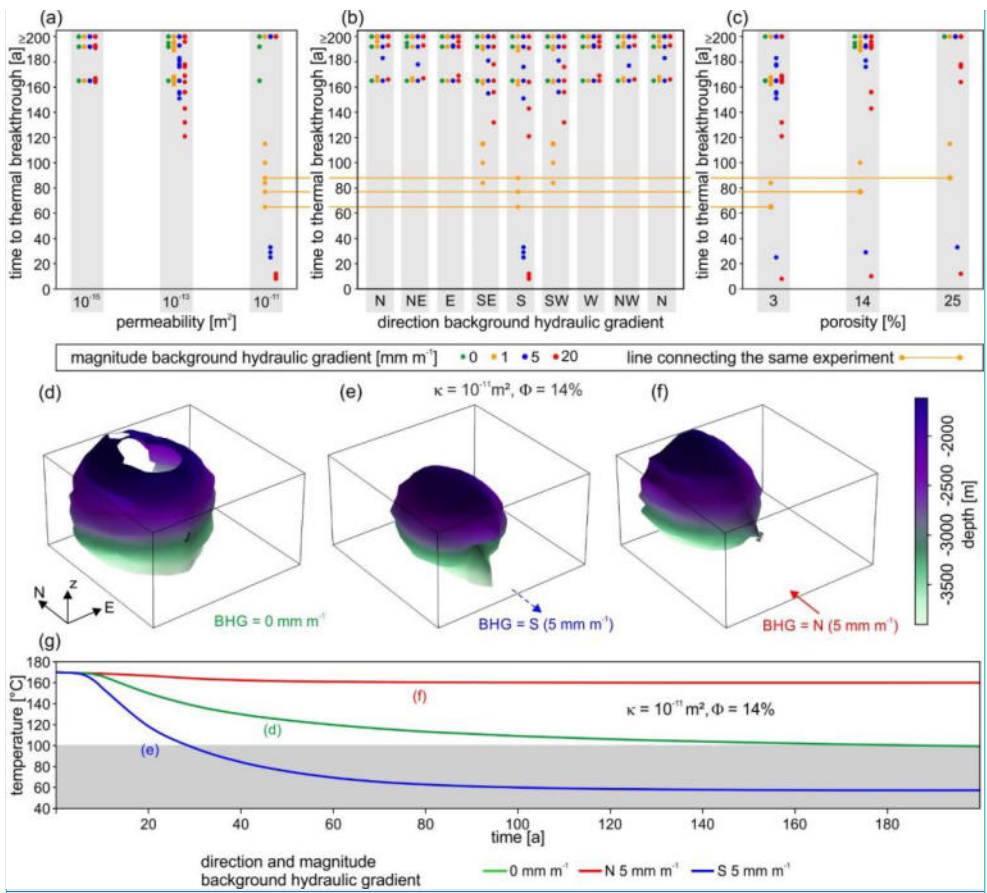

Kommentiert [A77]: R2 – point 1.1

Fig. 2: Parameter values against time to thermal breakthrough for model experiments with homogenous and isotropic structure (Scenario 1). Plots (a), (b), and (c) each contain the same results of 225 simulations, but are arranged according different x-axes. The results show that with increasing permeability, the BHG becomes the prime factor that determines time to thermal breakthrough, while the effect of porosity is minor. Plots (d), (e), and (f) show the shape of the HDI after 100 years for a model with a permeability of  $10^{-11} \text{ m}^2$  and porosity of 14%, with no BHG (d), with a BHG of  $5 \text{ mm m}^{-1}$  to the S (e), and with a BHG of  $5 \text{ mm m}^{-1}$  to the N (f). At high permeabilities and magnitudes of the BHG, the shape of the HDI becomes ellipsoidal. Panel (g) shows the development of the production temperature over time for the models presented in (d–f).




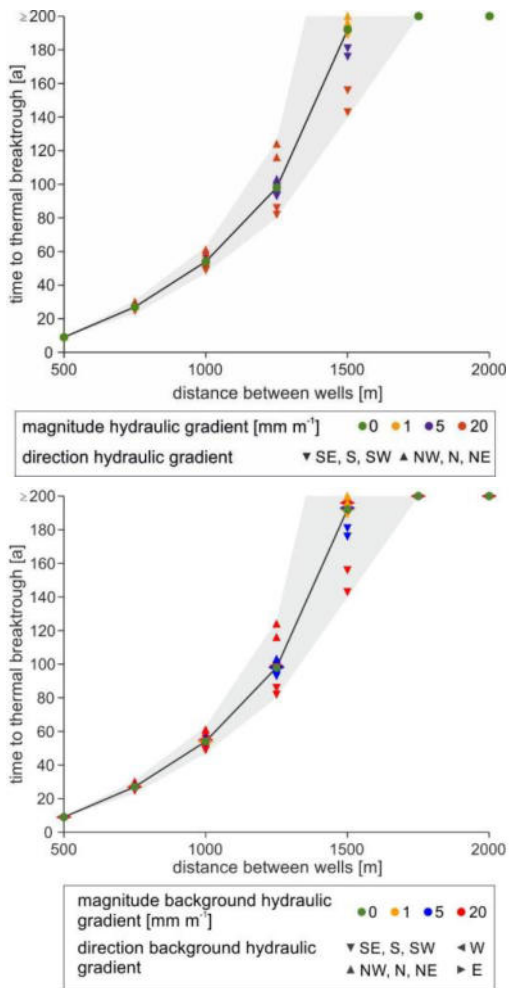


Fig. 3: Time to thermal breakthrough vs. distance between injection- and production well. The plot contains the results of 150 simulations. For models without BHG, the relationship of time to thermal breakthrough to distance is not linear. The increasing spread observed at the greater distance is due to the influence of the BHG, which increases with distance. The basic model setup is identical to the medium porosity and permeability model ( $\kappa = 10^{-13} \text{ m}^2$  and  $\theta = 14\%$ ). The black line connects the models with zero BHG, the grey-shaded area shows expected lifetimes for possible configurations of BHG orientation.

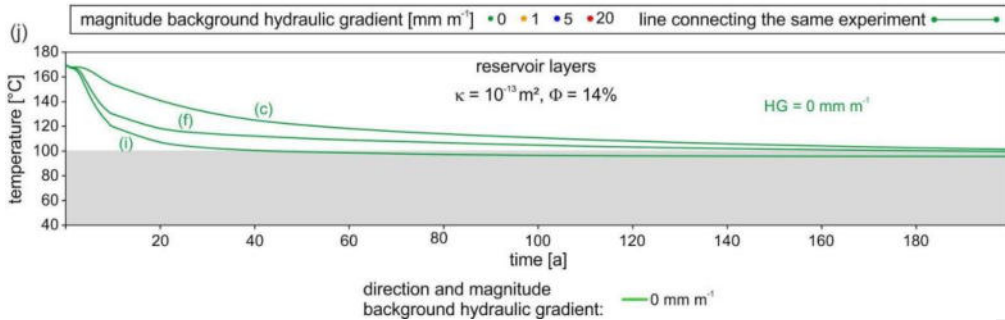

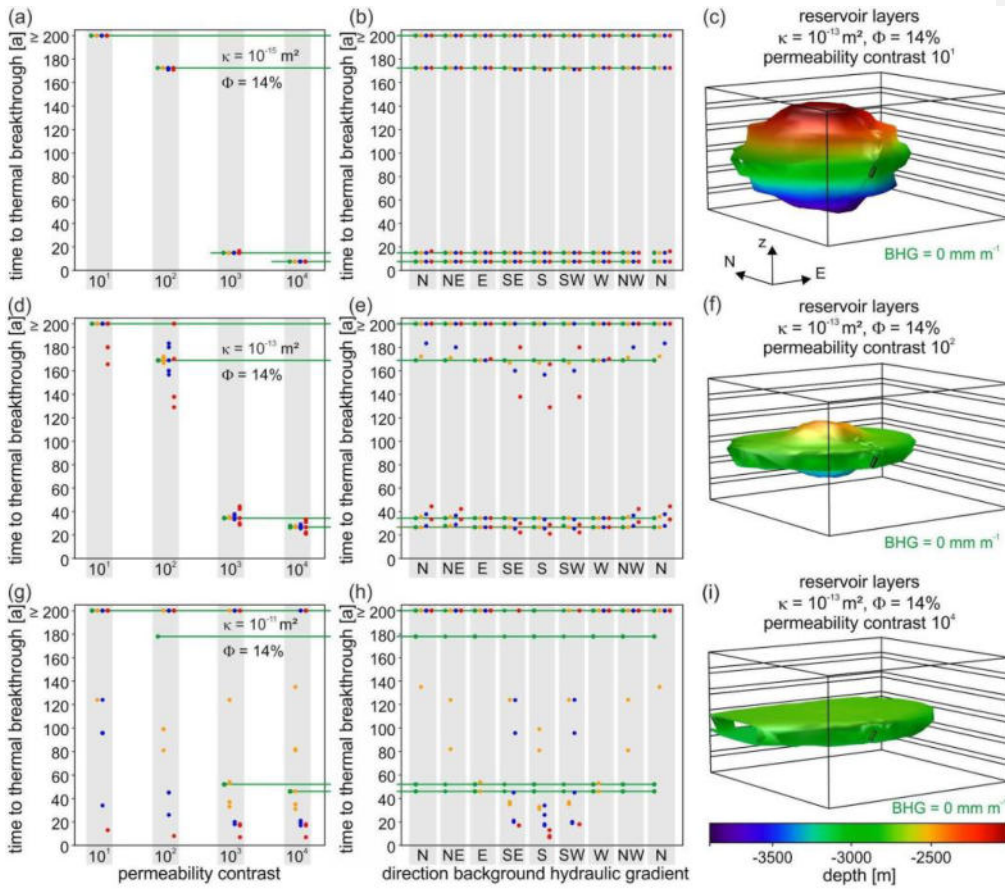


Kommentiert [A78]: R2 – points 1.1, 2.12, and 2.13

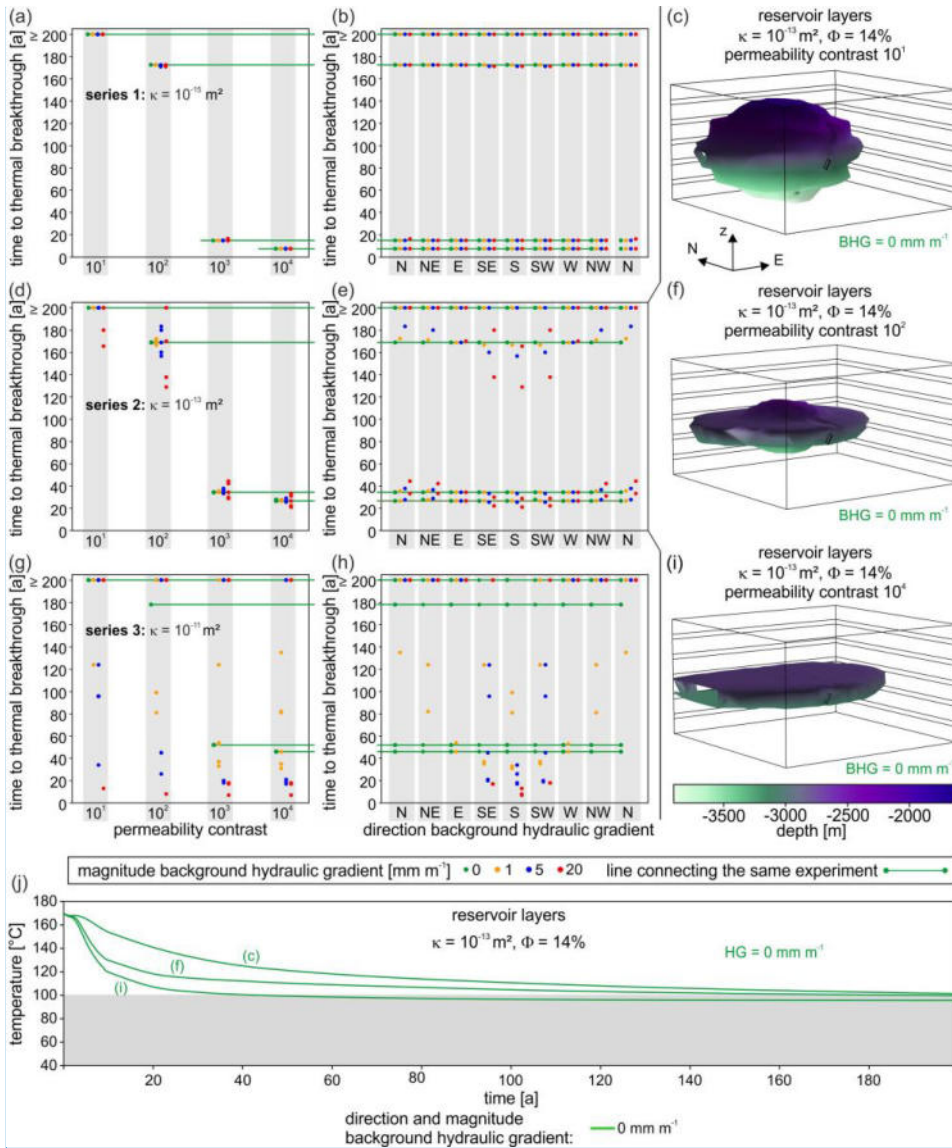


835 Fig. 4: Parameter values against thermal breakthrough for model experiments with layered permeability contrasts (Scenario 2). Plots (a) to (b), (d) to (e), and (g) to (h) show the results of three permeability series. Each series contains the results of the same 3100 simulations, but are arranged according different x-axes. The results show that a threshold exists for permeability contrasts between 2 and 3 orders of magnitude between reservoir- and confining layers above which fluid exchange is suppressed. The result is an increasingly flatter shape of the HDI, i.e., a reduction of utilizable reservoir volume, which only at high permeabilities can be compensated for by a favourably oriented BHG. In (c), (f), and (i), the shape of the HDI after 100 years is shown for the case of intermediate permeable reservoir layers (series 2), permeability contrasts of 2, 3, and 4 orders of magnitude and without applied BHG. Panel (j) shows the development of the production temperature over time for the models presented in (c), (f), and (i).


Kommentiert [A79]: R2 – point 2.12, 1.5

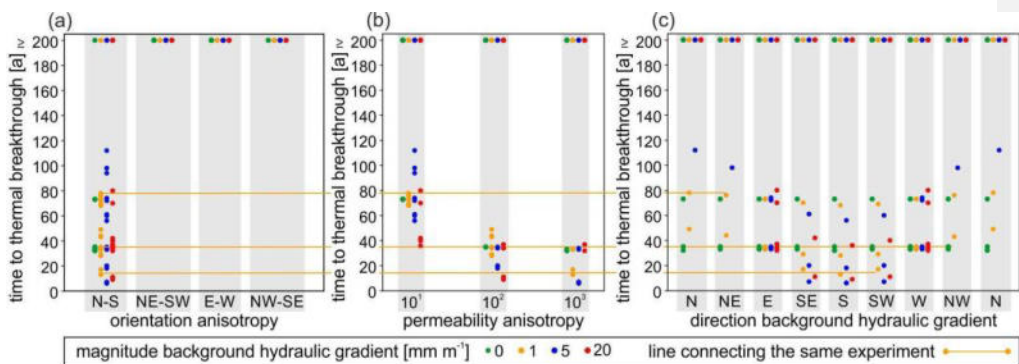


(d) permeability anisotropy = 10<sup>2</sup> E-W oriented





(e)



(f) permeability anisotropy = 10<sup>2</sup> N-S oriented

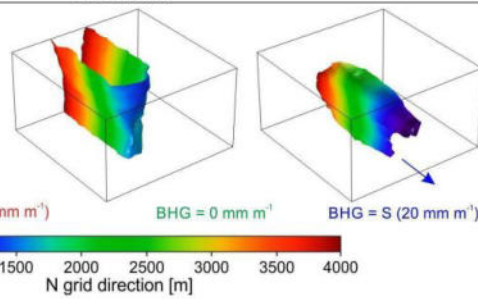

(g)

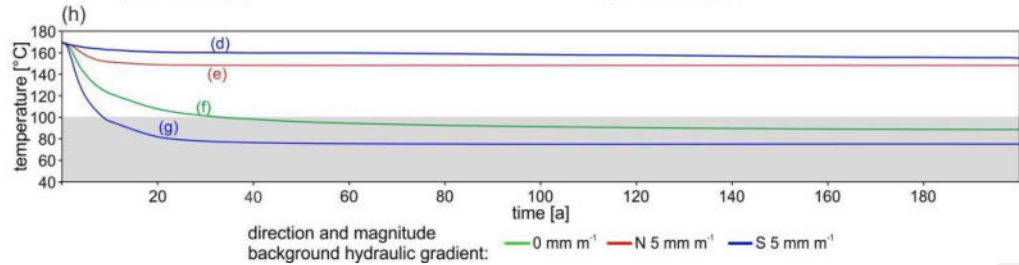

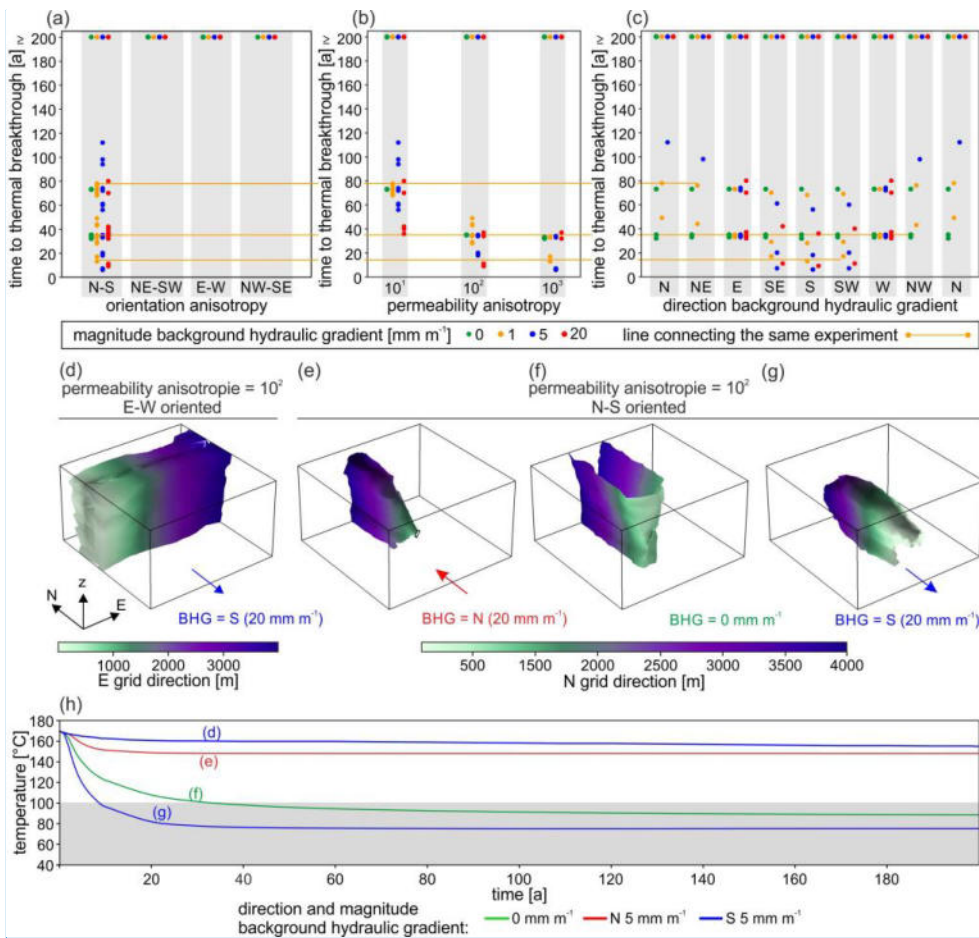
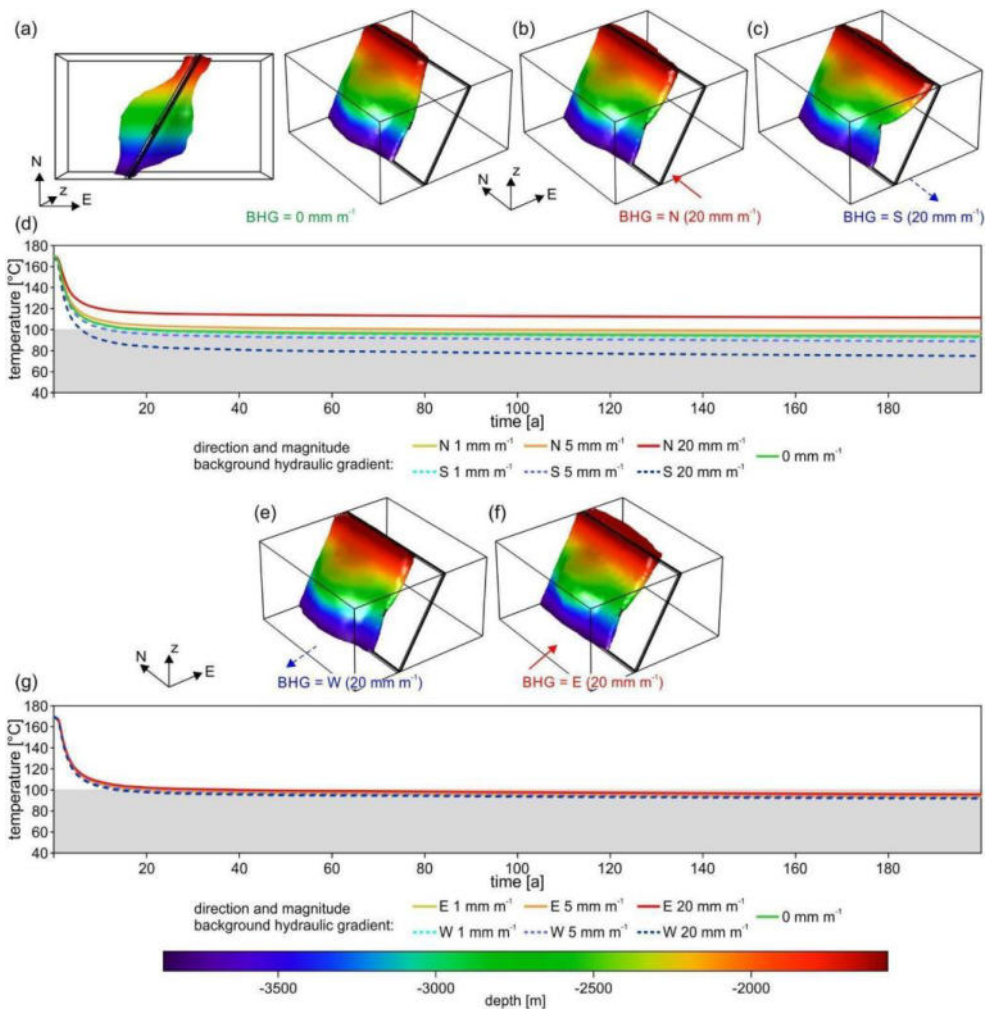


Fig. 5: Parameter values against time to thermal breakthrough for model experiments with vertically oriented fracture anisotropy (Scenario 3). Plots (a), (b), and (c) each contain the same results of 300 simulations, but are arranged according different x-axes. The results show that permeability anisotropy largely controls time to thermal breakthrough and that the effect of anisotropy reaches its maximum at  $10^2$ . (a) for cases with the anisotropy (sub)parallel to well configuration the BHGs direction is of importance and causes either a very short or long reservoir lifetime. (d), (e), (f), and (g) HDI after 100 years. The HDI forms a vertical volume parallel to the orientation of the anisotropy, independent of the direction of the BHG. Panel (h) shows the development of the production temperature over time for the models presented in (d–g).

Kommentiert [A80]: R2 – point 1.1

Kommentiert [A81]: R2 – point 1.5



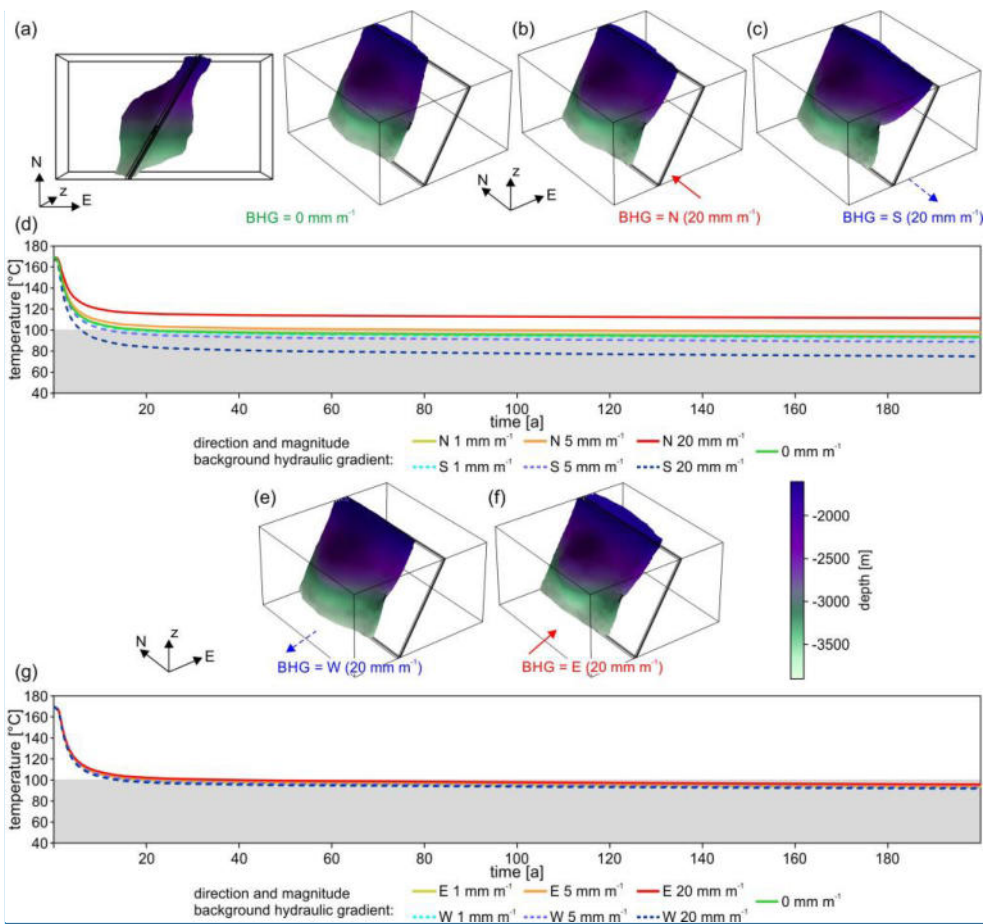
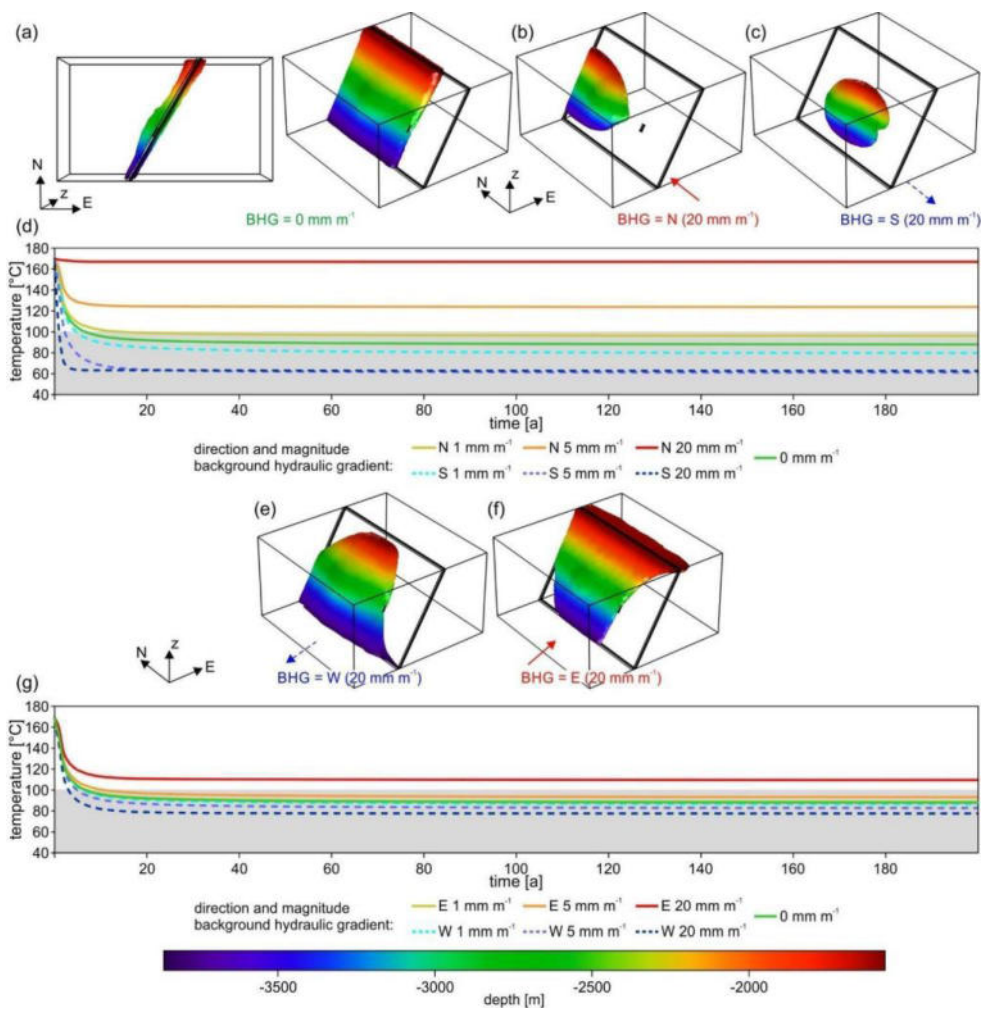


Fig. 6: Temperature development and shapes of the HDI for faults that consist of a damage zone. In (a), (b), and (c), the shapes of the HDI after 100 years for fault-parallel BHGs. The HDI is in large parts restricted to the damage zone, but expands around the injection well into the host rock. Plots (d) and (g), show the temperature developments over time of the produced fluid and contain the results of 13 individual simulations. In (d) it shows, that the production temperatures, independent of BHG, drop sharply in the first 10 years and become, independent of BHG, almost stable after about 20 years. Notably, the differences between the different BHGs are comparatively small. In (e) and (f), the shapes of the HDI for BHGs normal to the strike of the fault after 100 years. (g) the temperature developments for east- and westwards-oriented BHGs are almost identical.

Kommentiert [A82]: R2 – point 1.1



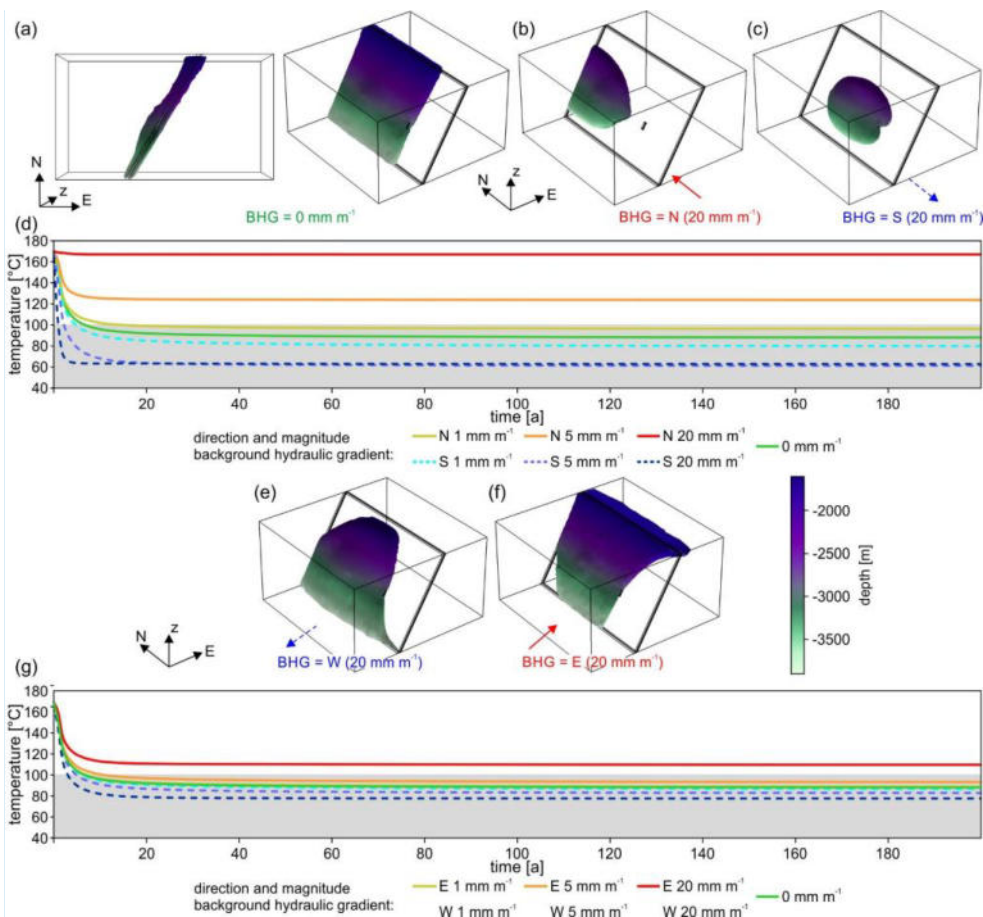
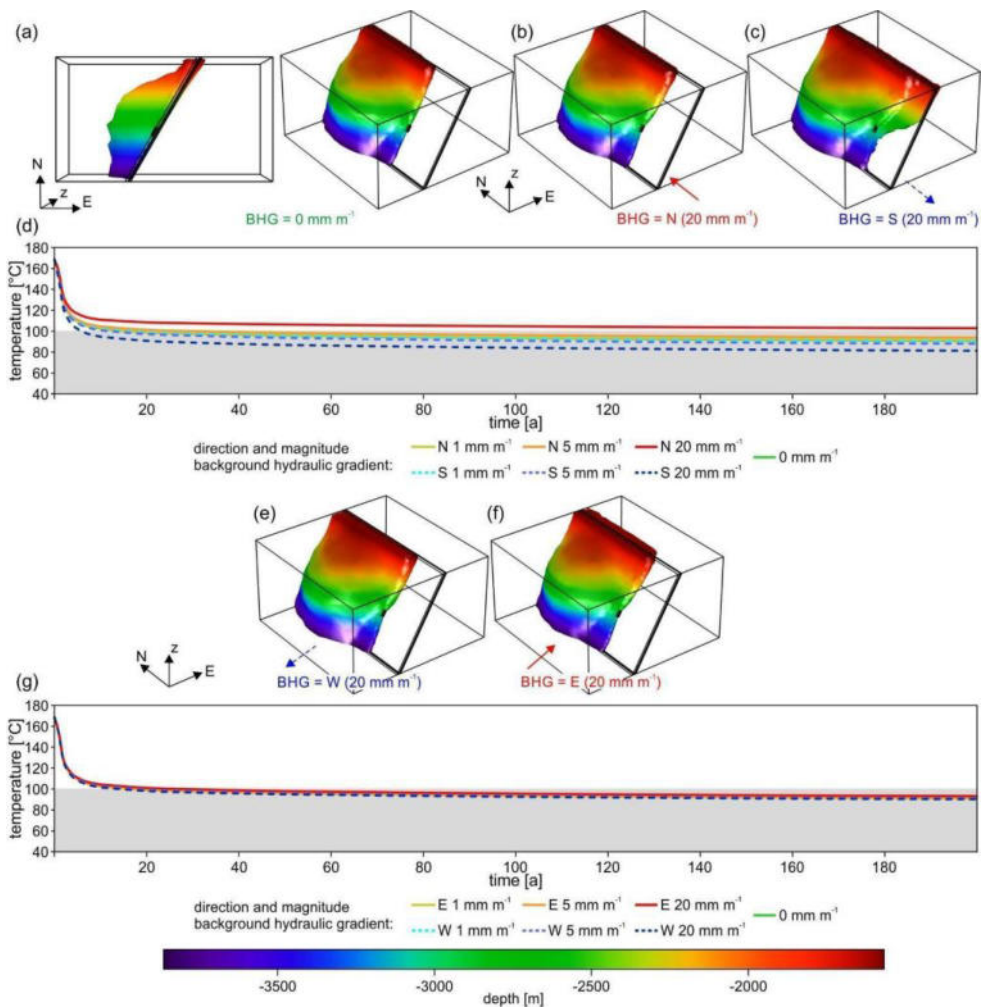


Fig. 7: Temperature development and shapes of the HDI for faults that consist of a damage zone with a positive fault-parallel fracture anisotropy. In (a), (b), and (c), the shapes of the HDI after 100 years for fault-parallel BHGs. The HDI is restricted to the damage zone. Fault-parallel BHG has a strong effect on the shape of the HDI. Plots (d) and (g) show the temperature developments over time of the produced fluid and contain the results of 13 individual simulations. (d) high northward BHGs hinder thermal depletion efficiently, while southward BHGs cause almost immediate depletion. In (e) and (f), shapes of the HDI for BHGs normal to the strike of the fault after 100 years. Together with (g) they show that a BHG in dip direction of the fault has a negative effect on reservoir lifetime, compared with a BHG opposed to the dip direction, which leads to a very short thermal lifetime, i.e., less than 10 years.

Kommentiert [A83]: R2 – point 1.1







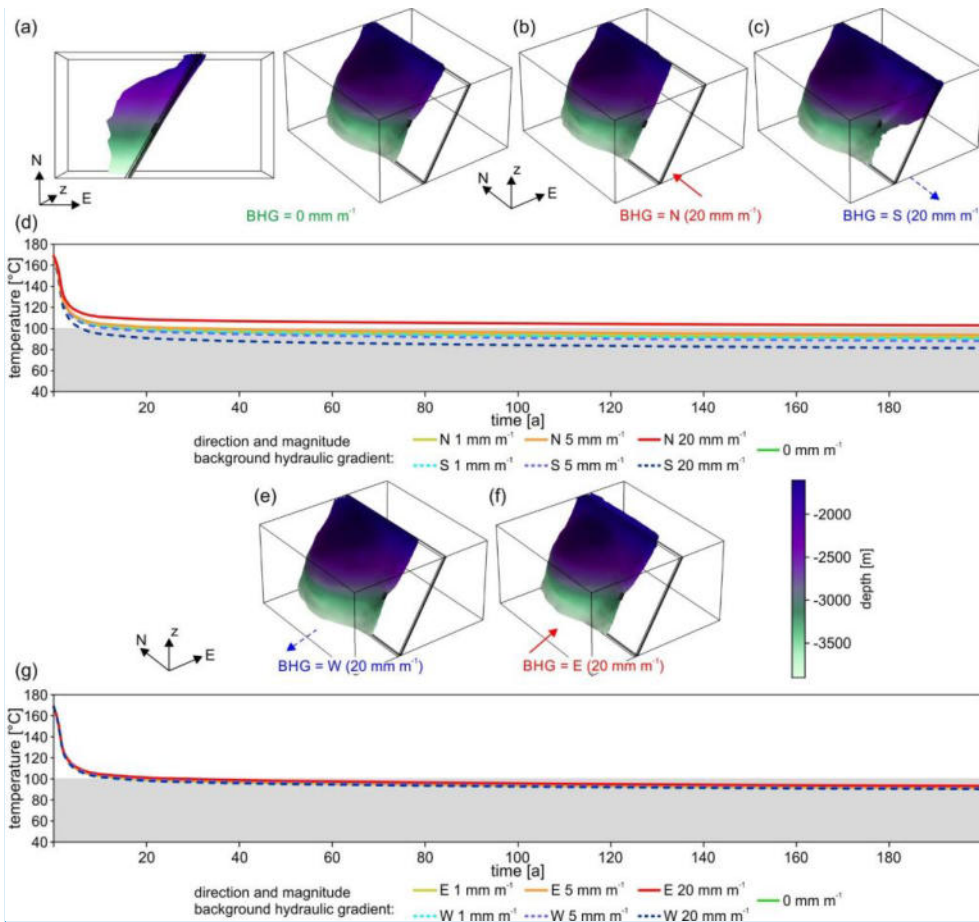


Fig. 8: Temperature development and shapes of the HDI for faults that consist of an impermeable fault core surrounded by two damage zones. In (a), (b), and (c), the shapes of the HDI after 100 years for fault-parallel BHGs. The HDIs are restricted to the east by the impermeable fault core, but extend to the west into the host rock at the injection well. Plots (d) and (g) show the temperature development over time of the produced fluid and contain the results of 13 individual simulations. (d) orientation and magnitude of the BHG have comparable small impact on the temperature development. After a sharp initial drop, the temperatures stabilize after about 10 years. Only in the case of the highest northward-directed gradients does the temperature stays above 100°C. In (e) and (f), shapes of the HDI for BHGs normal to the strike of the fault after 100 years. The HDI shapes are almost identical to those for BHGs parallel to the fault. (g) the temperature developments for BHGs normal to the fault are similar for all tested magnitudes, i.e., the 100°C threshold is reached after 10–20 years and the temperatures stabilize just below the threshold.

Kommentiert [A84]: R2 – point 1.1

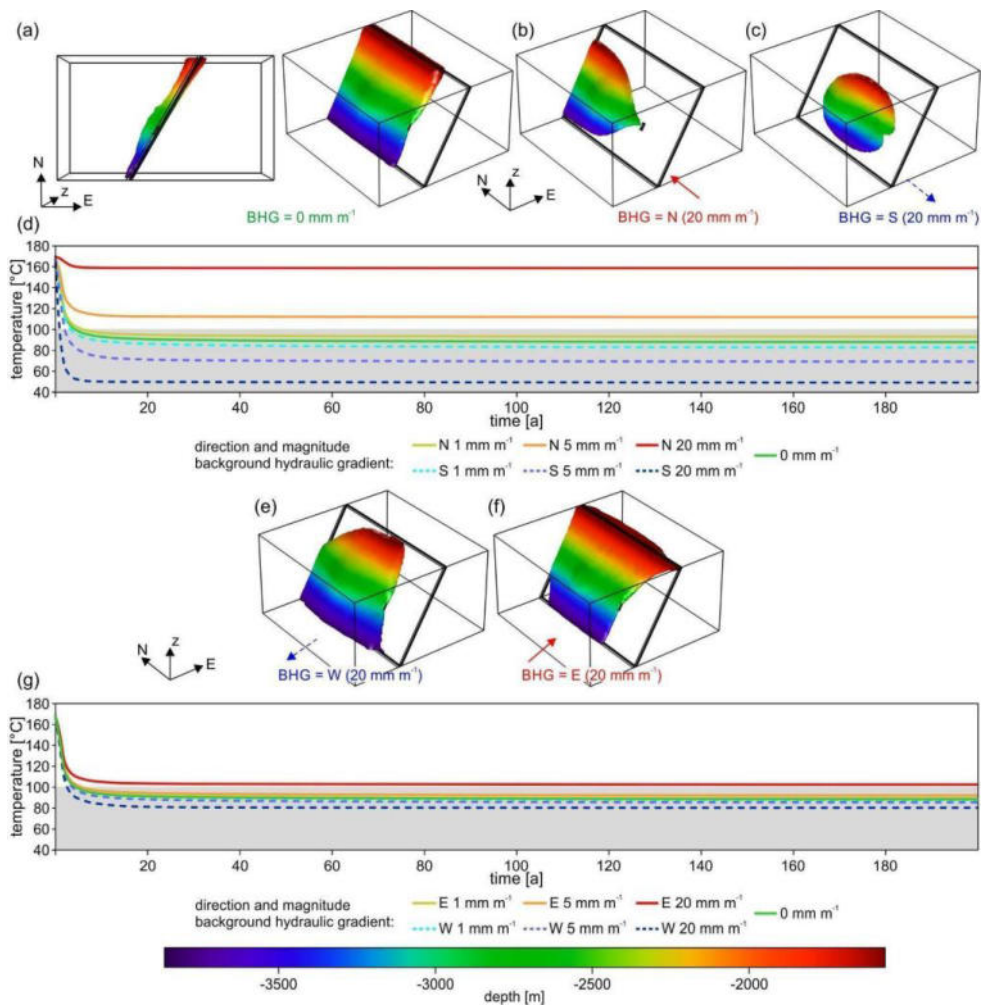

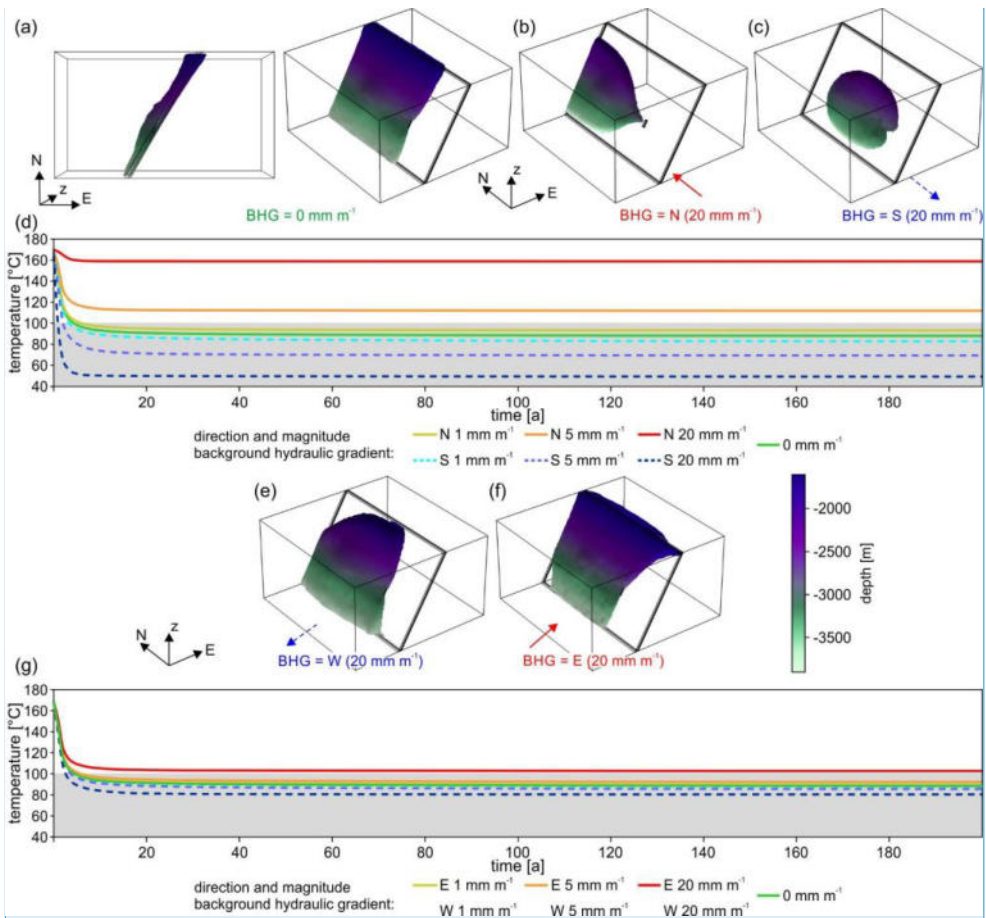

Kommentiert [A85]: R2 – point 1.1

Fig: 9: Temperature development and shape of the HDI for faults consisting of a damage zone with fault parallel fracture anisotropy and an impermeable fault core. In (a), (b), and (c), the shapes of the HDI after 100 years for fault-parallel BHGs. The HDIs are entirely restricted to the western damage zone. Their shape within the fault zone varies significantly, depending on the BHG. Plots (d) and (g), show the temperature development over time of the produced fluid and contain the results of 13 individual simulations. (d) northward BHGs completely suppress temperature drops at the production well, southward BHGs lead to immediate depletion of the reservoir. In (e) and (f), shapes of the HDI -for BHGs normal to the strike of the fault after 100 years.

885  
890

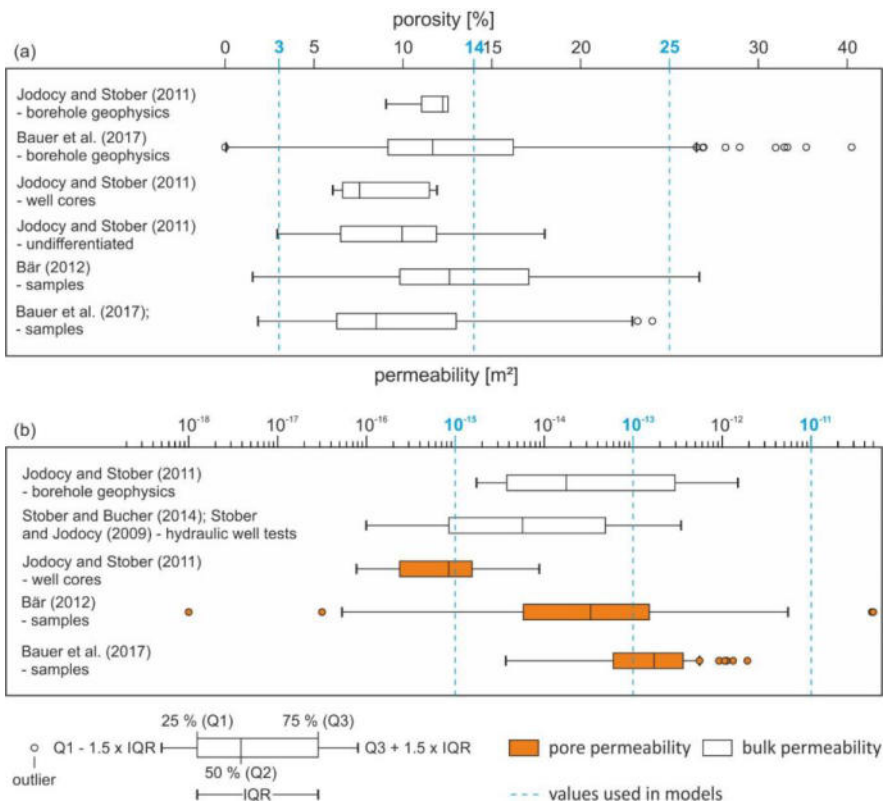


Fig. 10: Box-and-whisker plot of values reported for permeability and porosity of Buntsandstein rocks from the Upper Rhine Graben. (a) The values for porosity reach from almost zero to more than 25%, with the majority between about 7 and 17%. (b) The values for permeability cover a range larger than 7 orders of magnitude. Parameters used in this study are indicated by the blue lines. Modified after Bauer (2018).

895