

# Stress field orientation controls on fault leakage at a natural CO<sub>2</sub> reservoir

Johannes M. Miocic<sup>1</sup>, Gareth Johnson<sup>2</sup>, Stuart M.V. Gilfillan<sup>3</sup>

<sup>1</sup>Institute of Earth and Environmental Sciences, University of Freiburg, Albertstr. 23b, 792104 Freiburg, Germany

5 <sup>2</sup> Department of Civil and Environmental Engineering, University of Strathclyde, James Weir Building, Glasgow, G1 1XJ, UK

<sup>3</sup> School of Geosciences, University of Edinburgh, Grant Institute, James Hutton Road, The King's Buildings, Edinburgh, EH9 3FE, UK

*Correspondence to:* Johannes M. Miocic (johannes.miocic@geologie.uni-freiburg.de)

## 10 **Abstract.**

Travertine deposits present above the St. Johns Dome natural CO<sub>2</sub> reservoir in Arizona, USA, document a long (>400 ka) history of surface leakage of CO<sub>2</sub> from a subsurface reservoir. These deposits are concentrated along surface traces of faults implying that there has been a structural control on the migration pathway of CO<sub>2</sub> rich fluids. Here, we combine slip tendency and fracture stability to analyse the geomechanical stability of the reservoir-bounding Coyote Wash Fault for three different stress fields and two interpreted fault rock types to predict areas with high leakage risks. We find that these areas coincide with the travertine deposits on the surface indicating that high permeability pathways as a result of critically stressed fracture networks exist in both a fault damage zone and around a fault tip. We conclude that these structural features control leakage. Importantly, we find that even without in-situ stress field data, the known leakage points can be predicted using geomechanical analyses, despite the unconstrained tectonic setting. Whilst acquiring high quality stress field data for secure subsurface CO<sub>2</sub> or energy storage remains critical, we shown that a first order assessment of leakage risks during site selection can be made with limited stress field knowledge.

## 1 Introduction

The successful subsurface storage of fluids in sedimentary basins is key for GeoEnergy technologies such as Carbon Capture and Storage (CCS), cited as a cost-effective tool for climate change mitigation, or for energy storage, required to balance the intermittency of future energy systems relying on renewable sources (Alcalde et al., 2018; Matos et al., 2019; Scott et al., 2013). The integrity of such engineered subsurface storage sites is controlled by a range of geological, geochemical, and geotechnical factors. One major concern is that impermeable caprock seals may be bypassed by faults and naturally occurring, or induced, fracture networks which can form preferential fluid pathways. These could provide conduits for fluid migration, potentially leading to the rapid migration of the stored fluid (e.g., CO<sub>2</sub>, H<sub>2</sub>, methane) to shallow aquifers or the atmosphere (IPCC, 2005; Shipton et al., 2004; Song and Zhang, 2012). Indeed, selection criteria for subsurface storage sites commonly

cite the need for minimal faulting and/or low permeability faults intersecting or bounding the storage site (Chadwick et al., 2008; IEA GHG, 2009; Miocic et al., 2016). However, within sedimentary basins, which are key targets for geological storage of fluids, faults will occur naturally close to or within a storage complex and thus predictability of whether a fault will act as barrier to fluid flow or not is key for an accurate risk assessment.

35 Whether a fault zone is sealing or non-sealing is dependent on the structure and composition of the fault zone and the mechanics of the faulting (Faulkner et al., 2010). In a widely used simple conceptual model for fault zones in siliciclastic rocks, strain is localized in the fault core that is surrounded by a damage zone of secondary structural discontinuities. Fault zones can have a single high-strain core (Chester and Logan, 1986) or contain several cores (Choi et al., 2016; Faulkner et al., 2003). The damage zone and the fault core have contrasting mechanical and hydraulic properties, with the fault core often being rich in  
40 phyllosilicates which typically have low permeability. Contrastingly, open fractures in the damage zone can have a substantially higher permeability than the host rock, if not diagenetically cemented (Caine et al., 1996; Cappa, 2009; Faulkner and Rutter, 2001; Guglielmi et al., 2008). Lateral fluid migration across the fault zone is thus controlled (1) by the permeability and continuity of the fault gouge/rock within the fault core(s), which is dependent on the host rock composition, shear strain and faulting mechanism, as well as (2) the juxtaposition of strata across the fault (Yielding et al., 1997). Inversely, vertical  
45 fluid migration is governed by fracture permeability in the damage zone (Davatzes and Aydin, 2005).

A significant amount of research has focused on understanding the mechanisms and parameters that control the composition, and continuity of fault gouges as well as their permeability for different fluids as they have the potential to form effective seals (Karolytè et al., 2020; Lehner and Pilaar, 1997; Lindsay et al., 1993; Miocic et al., 2019b; Vrolijk et al., 2016). The damage zone permeability is controlled by the permeability of the host rock, the presence and geometric composition of macro-scale  
50 fracture networks and deformation band networks which decrease in frequency with increasing distance from the fault core, as well as burial history, cementation and in situ stresses (Mitchell and Faulkner, 2009; Shipton et al., 2002). Outcrop studies have shown flow channelling and emphasise the strong spatial and temporal heterogeneity of fault zones (Bond et al., 2017; Burnside et al., 2013; Dockrill and Shipton, 2010; Eichhubl et al., 2009; Schulz and Evans, 1998; Soden et al., 2014). If fracture networks or faults are close to failure due to tectonically induced changes in the stress conditions or changes in pore pressure,  
55 vertical fluid flow is enhanced (Barton et al., 1995; Wiprut and Zoback, 2000). This so called fault-valve behaviour, where faults act as highly permeable pathways for fluid discharge, is particularly likely for faults that remain active while unfavourably oriented for reactivation within the prevailing stress field (Sibson, 1990). Geomechanical parameters such as slip tendency (Morris et al., 1996) or fracture stability (Handin et al., 1963; Terzaghi, 1923) can be used to assess the potential of vertical fluid flow. The latter considers pore pressure which is a critical parameter controlling reservoir integrity not only with  
60 regards to fault weakening (Hickman et al., 1995) but also with respect to the integrity of the caprock (Caillet, 1993; Sibson, 2003).


The need for improved understanding of fracture networks and the potential of fracture reactivation and/or hydromechanically fracturing of caprock due to the injection of CO<sub>2</sub> has been highlighted by experiences at existing industrial CO<sub>2</sub> storage projects.

At the Sleipner storage site, fractures in thin caprock layers appear to control the size and extent of the CO<sub>2</sub> plume (Cavanagh et al., 2015). The storage site of In Salah, Algeria, where between 2004 and 2011 around 4 million tons of CO<sub>2</sub> were injected into an anticlinal structure at ~1,800 m depth, has been the focus of many studies on fracture reactivation and hydraulic fracturing of caprocks as observations at the end of the injection period suggested that pressure had migrated vertically into the caprock (Bond et al., 2013; Michael et al., 2010; Rutqvist et al., 2010; Stork et al., 2015). The existing data indicate that injection pressures were too high for the low permeability reservoir rock and hydraulically fractured the reservoir and the lower caprock, potentially also reactivating pre-existing fracture networks related to small scale faults (White et al., 2014). To study how vertical fluid flow along fault zones may be related to geomechanical parameters we examine the naturally occurring CO<sub>2</sub> reservoir of the St. Johns Dome, located at the border of Arizona and New Mexico. At this site, migration of fluids from the subsurface reservoir to the surface is directly linked to faults which extend through the caprock (Gilfillan et al., 2011; Moore et al., 2005), with leakage having occurred for at least 420 ka and is still ongoing (Miocic et al., 2019a; Priewisch et al., 2014). We show that leakage locations are controlled by the orientation of the reservoir bounding fault with respect to the regional stress field.


## 2 Geological setting

The St. Johns Dome (or Springerville-St. Johns Dome) natural CO<sub>2</sub> reservoir has more than  $4.7 \times 10^{10}$  m<sup>3</sup> of recoverable CO<sub>2</sub> and is located on the southeastern edge of the Little Colorado River Basin on the Colorado Plateau (Fig. 1) near to the Transition Zone between the Basin and Range and Rio Grande Rift tectonic provinces (Bashir et al., 2011; Rauzi, 1999). It is one of sixteen known naturally occurring CO<sub>2</sub> reservoirs on the Colorado Plateau and one of the few known naturally occurring CO<sub>2</sub> reservoirs world-wide where fluids are leaking to the surface (Gilfillan et al., 2008, 2009; Miocic et al., 2016). The CO<sub>2</sub> reservoir lies within a broad, NW-trending anticline that is intersected by the steeply dipping NW-SE trending Coyote Wash fault (Fig. 2, Moore et al., 2005; Rauzi, 1999). This major fault appears to also to form the western boundary of the productive portion of the former commercially exploited St. Johns Dome CO<sub>2</sub> gas field. Normal displacement across the fault ranges from less than 30 m (Salado Springs) to more than 200 m at the apex of the Cedar Mesa Anticline, 25 km SE of Salado Springs (Embid, 2009). The fault is thought to be related to Paleogene Laramide compressional tectonics which led to monoclinial folding of the Phanerozoic strata and the reactivation of older basement structures such as the Coyote Wash Fault on the Colorado Plateau (Marshak et al., 2000). The normal displacement of the fault suggests an inversion of the reverse fault related to the Basin and Range extension starting in the Early Miocene and continuing in the Pliocene as evident from displacement of Pliocene basalt flows (Embid, 2009). The Permian reservoir rocks (siltstones, sandstones and limestones) which discordantly overlie Precambrian granites (Fig. 3) are relatively shallow at 400–700 m depth and the CO<sub>2</sub> is present in the gas state (Gilfillan et al., 2011). Anhydrite and mudstone beds within the Permian rocks divide the reservoir vertically into several producing zones while Triassic and Cretaceous calcareous shales and mudstones act as seals (Fig. 3). The Permian strata include, from oldest to youngest, the Supai Formation, which consist of the Amos Wash Member, Big A Butte Member, Fort Apache

Member, Corduroy Member, and the San Andres Limestone Glorieta Sandstone. A detailed geological description of the Permian Rocks can be found in Rauzi (1999). The current gas-water-contact is at 1425 m above sea level and the reservoir not filled-to-spill. The surface rocks are mainly Triassic to Quaternary sediments, Plio-Pleistocene volcanic rocks and travertine deposits (Fig. 2). To the NW the CO<sub>2</sub> reservoir is bordered by the Holbrook Basin (Harris, 2002; Rauzi, 2000) and it is closely associated with the Plio-Pleistocene Springerville volcanic field which lies just to the south and south-west of the CO<sub>2</sub> reservoir (Crumpler et al., 1994; Sirtine, 1958). The basaltic volcanic field consists of more than 400 individual vents and related flows, with the oldest volcanic activity dating back to around 9 Ma and the youngest flows, which can be found 8 km NW of Springerville, to about 0.3 Ma (Condit et al., 1993; Condit and Connor, 1996). As the CO<sub>2</sub> within the reservoir is of magmatic origin (Gilfillan et al., 2008, 2009, 2011), charging of the reservoir is thought to be the result of degassing of magma underneath the volcanic field, with CO<sub>2</sub> migrating along fractures and faults through the basement into the reservoir (Mioicic et al., 2019a).

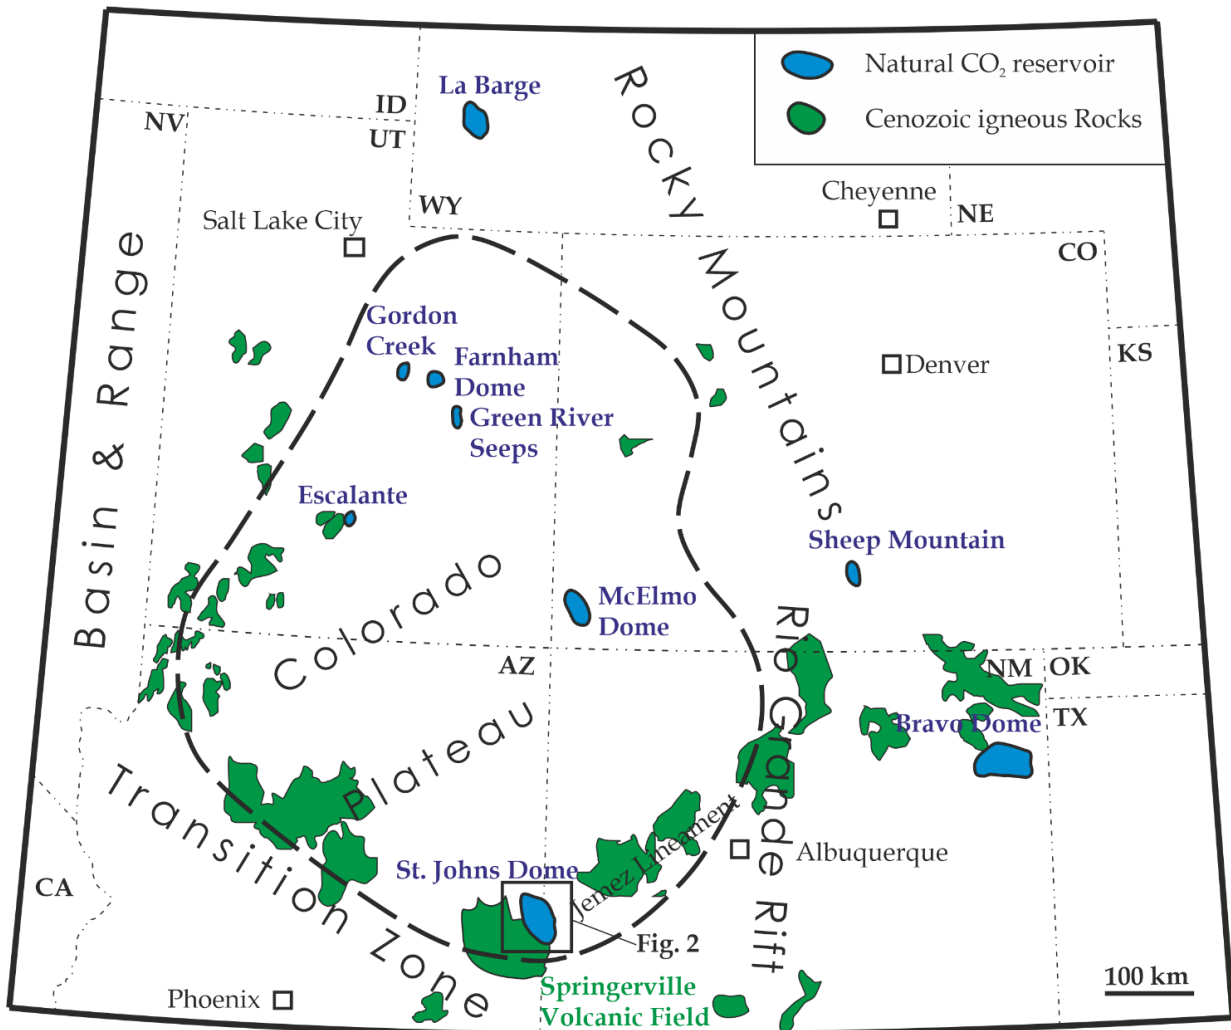



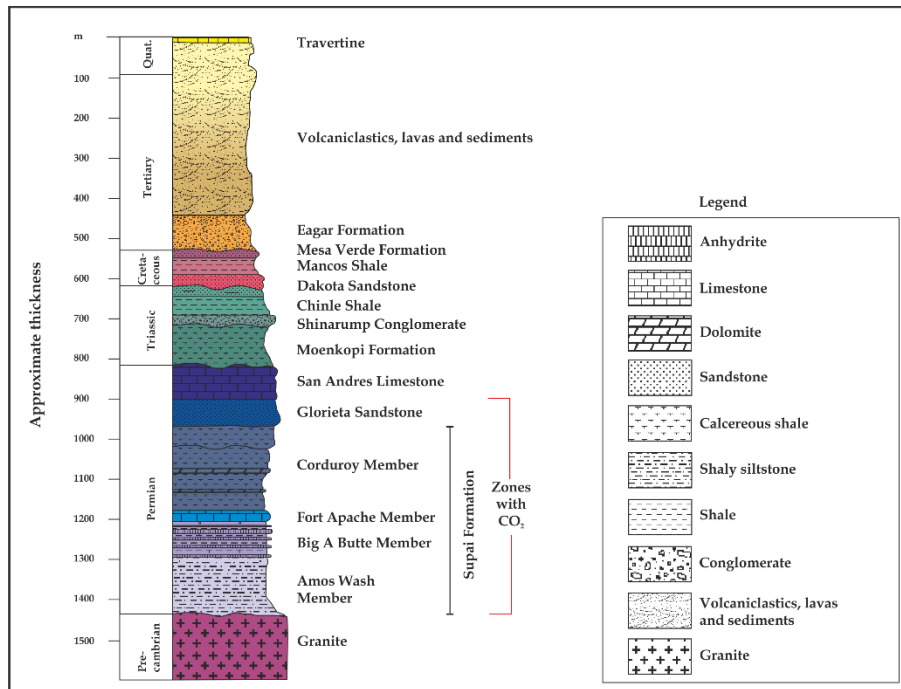

**Figure 3: Stratigraphic column of the St. Johns-Springerville area. Note that Cretaceous and younger deposits are often thinner than shown in this figure. CO<sub>2</sub> accumulations occur in the Permian strata. After Rauzi (1999) and Embid (2009).**


## 2.1 Expression and timing of fluid flow

120 The travertine deposits at St. Johns Dome are an expression of CO<sub>2</sub>-charged fluids migrating from the subsurface to the surface. Travertine formation occurs when CO<sub>2</sub>-rich fluids outgas CO<sub>2</sub> as they migrate upwards to shallower depths and lower pressure, resulting in CaCO<sub>3</sub> supersaturation and carbonate precipitation. As such, the St. Johns Dome travertine deposits cover a surface area of more than 30 km<sup>2</sup>, spread out over more than 300 km<sup>2</sup> (Figs. 2 & 4), making them one of the greatest concentrations of travertine deposits in North America. Spatially, the travertine deposits are particularly concentrated in a 10 km long zone

125 between Salado Springs and Lyman Lake (Fig. 4, Gilfillan et al., 2011; Moore et al., 2005). This area, where present day travertine formation occurs (Priewisch et al., 2014), is bounded by the buried Coyote Wash Fault and the distribution of the travertine deposits and active springs suggests that the local groundwater hydrology has been influenced by the Coyote Wash Fault (Embid, 2009). Analyses of surface springs, groundwater wells and CO<sub>2</sub> wells with respect to the CO<sub>2</sub> composition, water composition and noble gas concentrations have shown that samples taken along the Coyote Wash Fault trace are

130 influenced by waters from depth that have been enriched in mantle derived <sup>3</sup>He and Ca (Gilfillan et al., 2014, 2011; Moore et al., 2005). Several modelling approaches emphasise the importance of the Coyote Wash Fault for CO<sub>2</sub> and He migration from the Supai Formation to the surface (Allis et al., 2004; Keating et al., 2014) as in all models migration of gas to the surface occurs only if the fault forms a permeable conduit through the cap rocks. Soil-flux measurements indicate that there is no diffuse CO<sub>2</sub> leakage through the cap rocks, suggesting instead that faults have controlled localized fluid flow (Allis et al.,

135 2005). In addition to the occurrences along the NE tip of the Coyote Wash Fault (cluster A), travertine mounds follow the trace of the Buttes Fault, of which the subsurface extent is not well constrained, over a distance of more than 7 km (cluster B). Travertine mounds are also found NE of the present-day extent of the CO<sub>2</sub> reservoir, with no clear link to other structural elements (cluster C). It is notable that there are no indications for fluid migration in the southern half of the reservoir.

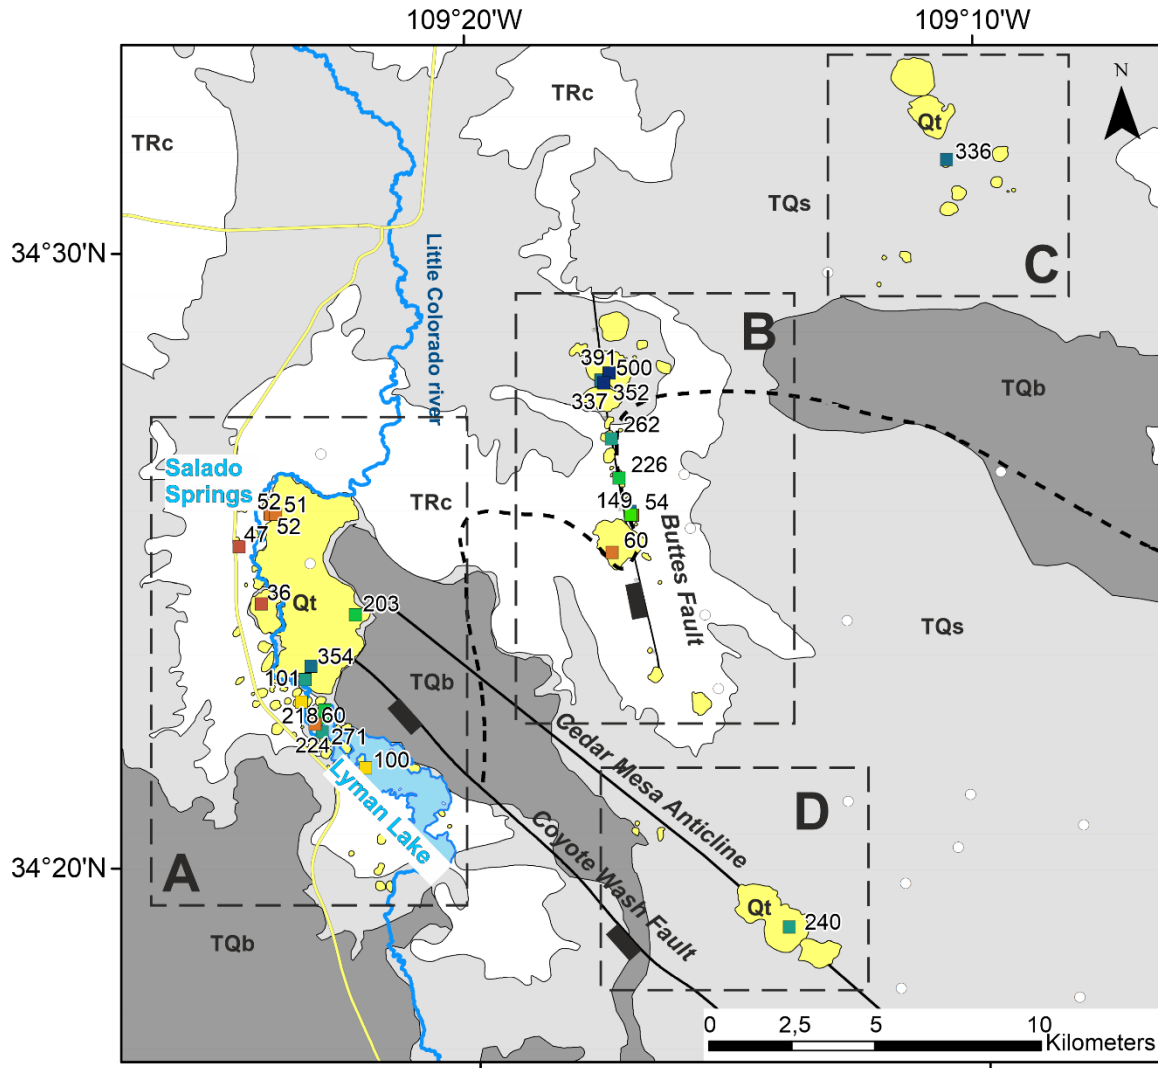

140 **Figure 4: Geological map illustrating the travertine deposits of the St. Johns Dome area. Coloured squares indicate available U-Th**  
**dating locations with respective ages (Miocic et al., 2019a; Priewisch et al., 2014). See Figure 2 for legend. Four clusters of travertine**  
**mounds can be identified: Cluster A, which spreads from Lyman Lake to Salado Springs, is at the tip of the Coyote Wash Fault,**  
**cluster B is follows the trace of the Buttes Fault, cluster C is not related to a known structural feature and is located north of the**  
**present day CO<sub>2</sub> reservoir, and cluster D is located on the crest of the Cedar Mesa Anticline. Note that ages along the Buttes Fault**  
**(cluster B) are generally becoming younger from North to South whilst the travertines of cluster A show a wide range of ages without**  
**an obvious spatial correlation with age.**

U-series dating of the travertine mounds shows that leakage of CO<sub>2</sub> from the reservoir to the surface has occurred for at least 420 ka (Fig. 4, Miocic et al., 2019a; Priewisch et al., 2014). Several of the samples analysed by Miocic et al. (2019a) fall

outside the dating limitations of the U-Th method (~500 ka), which indicates that leakage may have occurred over much longer  
150 time-scales. This is not surprising given the age of the Springerville volcanic field (earliest activity ~9 Ma) from where the  
magmatic CO<sub>2</sub> is almost certainly sourced. Individual seeps along the Buttes Fault have lifespans of up to 200 ka and the  
massive travertine platform between Salado Springs and Lyman lake has at least a similar lifetime. Volumetric calculations  
indicate that the subsurface reservoir is constantly or regularly recharged, as several times the volume of CO<sub>2</sub> stored in the  
current reservoir has leaked in the past (Miocic et al., 2019a). However, due to the long timeframe of leakage recorded by the  
155 travertine deposits, only a very low percentage (0.1–0.001 %) of the reservoir volume (1900 Mt CO<sub>2</sub>) has leaked annually and  
thus the site could still be seen as a suitable carbon storage site from a climate mitigation point of view (Miocic et al., 2019a).  
These observations illustrate that fluid migration at the St. Johns Dome occurs along fault zones and once migration pathways  
have been established they are spatially fixed for long periods (>100 ka). This is in contrast to other fault-controlled fluid  
migration pathways on the Colorado Plateau, for which it is suggested that these stay open only episodically for few thousand  
160 years after rapid fault movement and subsequently heal (Frery et al., 2015). Similar cyclic reopening and healing of fractures  
governing fault zone permeability has been recorded by travertine deposition at other active fault zones in Italy (Brogi et al.,  
2010). Spatially and temporally fixed migration pathways are concerning for subsurface storage sites and thus the processes  
controlling vertical fault zone permeability at the St. Johns Dome are analysed herein.

### 3 Methods

165 In order to investigate the mechanisms governing the vertical fluid flow at the St. Johns Dome, a geomechanical analysis of  
the Coyote Wash Fault was conducted using slip tendency and fracture stability approaches. Slip tendency ( $T_s$ ) is a method  
that allows for a fast assessment of the relative tendency of a fault surface to undergo slip under the present-state effective  
stress field. It is the ratio of resolved shear stress to resolved normal stress on a surface (Morris et al., 1996):


$$T_s = \frac{\tau}{\sigma_n}$$

170 where  $\tau$  is the shear stress and  $\sigma_n$  the effective normal stress acting on the fault. Slip is considered likely to occur on a surface  
if  $T_s \geq \mu_s$  with  $\mu_s$  being the coefficient of static friction which is generally assumed to be 0.6 (Byerlee, 1978; Moeck et al., 2009;  
Sibson, 2003). Thus using this assumption  $T_s$  predicts slip is more likely when the friction coefficient is exceeded but does not  
explicitly require fault properties to be input to model (simply requiring the normal and shear stresses and an assumed  
coefficient of friction). Fracture stability ( $F_s$ ) is the increase in pore pressure that is required to reduce the effective stresses  
175 such that a fault plane is forced into shear, tensile or hybrid failure (Handin et al., 1963; Terzaghi, 1923). Therefore failure  
envelopes must be explicitly considered to model  $F_s$  which requires inputting known rock properties such as cohesion and  
angle of internal friction and hence fault rock composition to model.

A 3D geological model of the St. Johns Dome was built based on published geological maps (Embaid, 2009; Serrine, 1958),  
well data from 37 exploration and production wells available from the Arizona oil and gas conservation commission (well



180 logs, horizon markers) and previously published reservoir horizon map and markers (Rauzi, 1999) using Move™. Between wells a constant stratigraphic thickness was assumed and for the fault a dip of 70° was estimated, based on previous works (Embid, 2009, Rauzi, 1999) and a 3D dip-domain construction (Fernandez et al., 2008) of the intersection of the fault trace with the 1/3 arc-second DEM of the 3D elevation programme of the USGS. The modelled fault has 6635 faces constructed as triangles from 3525 vertices. Cut-off-lines were created on the fault surface by extracting the dip from a 200 m wide patch of  
185 the horizon of interest on either side of the fault and projecting this along the dip-direction until it intersects with the fault (Yielding and Freeman, 2016). The current gas-water-contact is at 1494 m above sea level (Rauzi, 1999) and is assumed to be horizontal. Due to lack of pressure data, a hydrostatic pressure gradient is assumed (0.0105 MPa/m). Geomechanical analysis of the model was conducted with industry standard software (Move™ and TrapTester®). As no outcropping fault rocks were available, the Shale Gouge Ratio (Yielding et al., 1997) was used as a fault rock proxy. SGR was calculated from a  $V_{\text{shale}}$  log  
190 of well 10-29-31, which was calculated from the gamma ray log assuming a linear response (Asquith and Krygowski, 2004). As this method only applies to siliciclastic rocks, zonal  $V_{\text{shale}}$  values for evaporitic sequences (70% shale content for anhydrite, 55% shale for carbonates) were assumed, expecting rapid fault sealing for these lithologies (Pluymakers and Spiers, 2014) or low permeability fault rocks (Michie et al., 2018) were used. Resulting SGR values indicate a high potential of phyllosilicate rich fault rocks (Fig. 5). To emphasise the uncertainty regarding the fault rock composition, two different fault rocks were used  
195 for  $F_s$  calculations: a low friction fault rock (cohesion  $C=0.5$  MPa, coefficient of internal friction  $\mu=0.45$ ) and high friction fault rock ( $C=0.5$ ,  $\mu=0.6$ ) with rock strength values from the TrapTester® internal database. Note that for modelling purposes we assume a siliciclastic sequence, however the stratigraphic sequence also contains ~15 % carbonate and evaporitic rocks (Fig. 3) which may have locally significant influence on the fault rock strength.  $T_s$  results are presented using stereonet as this allows the reader to visualise how changes in the stress field orientation would influence fault stability while  $F_s$  results are  
200 presented on a Mohr circle as this allows a direct visualisation of how much the pore pressure needs to change to force different parts of the fault into failure. It also allows the reader to see how changes in fault rock strength could change the pore pressure needed for fault failure. For stress field data no in situ stress measurements from the gas field itself were available, however in addition to World Stress Map data (Heidbach et al., 2016) the nearby Springerville volcanic field can be used to derive the orientation of the horizontal stresses as presented in the following.

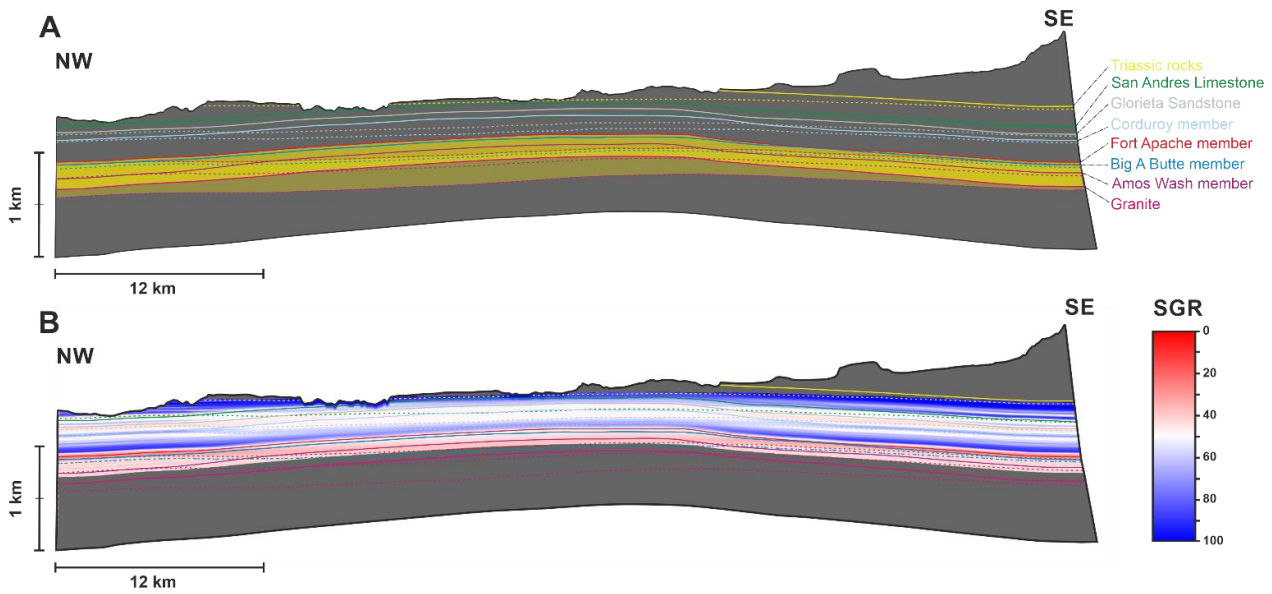

205 **Figure 5: (A) Allam diagram (Allan, 1989) of the Coyote Wash Fault, dashed lines represent hangingwall, straight line footwall cut-off lines. Yellow coloured horizons are the main reservoirs (Amos Wash member, Big A Butte member and Fort Apache member of the Permian Supai Formation). (B) Shale Gouge Ratio plotted onto the Coyote Wash Fault plane. SGR indicates that for most of the fault phyllosilicate-rich fault rocks are likely (SGR > 30).**

### 210 3.1 Stress field at the St. Johns Dome

The location of the St. Johns Dome reservoir at the margin of the Colorado Plateau and within the greater Basin and Range province has significant impact on the stress field in the study area. It is clear that the regional stress field is highly variable as shown by the available stress field data in the vicinity of the St. Johns Dome (50 km radius, Fig. 2) from the World Stress Map (Heidbach et al., 2016) combined with a regional study on volcanic vent orientation in the Springerville volcanic field (Table 1, Connor et al., 1992). Note that the maximum horizontal stress ( $SH_{max}$ ) from Connor et al. (1992) is based on vent clusters linearly aligned with lengths of 11 to 20 km length (Fig. 2) and that table 1 lists them as point measurements at the centre of the cluster. To the south and south-east of the  $CO_2$  field, the  $SH_{max}$  is oriented NE-SW while west of the reservoir the  $SH_{max}$  orientation is highly variable, ranging from NW-SE to E-W (Fig. 2). While these datapoints are associated with an uncertainty of at least  $\pm 15^\circ$ , the orientation of the stress field for the St. Johns Dome faults is difficult to constrain. A normal faulting regime [ $vertical\ stress\ (S_v) > maximum\ horizontal\ stress\ (SH_{max}) > minimum\ horizontal\ stress\ (Sh_{min})$ ] is assumed as based on the World Stress Map and works by Kreemer et al. (2010) and Wong and Humphrey (1989) for this area of the Colorado Plateau. Integration of density logs (wells 10-29-31 and 11-16-30) gives a magnitude of  $S_v$  of 23 MPa/km. Minimal horizontal stress in normal faulting regimes is typically about 65-85% of the vertical stress (Hillis, 2003), which gives a magnitude of  $Sh_{min}$  in the range of 15 to 19.5 MPa with the magnitude of  $SH_{max}$  set between  $S_v$  and  $Sh_{min}$ .

225 As the reported stress field measurements appear to form three clusters (Tab. 1), three different stress fields were defined (Tab. 2): stress field A is similar to the stress fields indicated by measurements 7 and 8, with  $SH_{max}$  having an azimuth of  $140^\circ$ ; stress

field B is oriented similar to the stress field measurements 5 and 6 with a  $SH_{max}$  azimuth of  $100^\circ$ ; and stress field C is similar to the stress fields indicated by measurements 2 to 4 with a  $SH_{max}$  azimuth of  $50^\circ$ . The solitary north-south stress field measurement (ID=1) was not considered further. For the ~NW-SE trending Coyote Wash Fault these stress fields also represent the most- (A), moderately- (B) and least-likely (C) cases for fault reactivation. Geomechanical analysis was conducted under all three defined stress fields.

**Table 1: Table listing published stress field indicators around the St. Johns Dome. WSM=World Stress Map. They form three clusters: IDs 2-4, 5 & 6, 7 & 8.**

ID	Lat.	Long.	$SH_{max}$ azimuth( $^\circ$ )	$Sh_{min}$ azimuth ( $^\circ$ )	Error	Faulting regime	Source
1	34.230	-109.630	8	98	$\pm 25$	NF	Heidbach et al., 2016
2	34.070	-108.930	35	125	$\pm 25$	NF	Heidbach et al., 2016
3	34.250	-108.870	42	132	$\pm 25$	NF	Heidbach et al., 2016
4	34.337	-109.530	61	151	$\pm 15$	NF	Connor et al., 1992
5	34.320	-109.575	86	176	$\pm 15$	NF	Connor et al., 1992
6	34.140	-109.680	105	195	$\pm 15$	NF	Heidbach et al., 2016
7	34.198	-109.457	132	222	$\pm 15$	NF	Connor et al., 1992
8	34.108	-109.450	151	241	$\pm 15$	NF	Connor et al., 1992

**Table 2: Stress fields used for the geomechanical modelling.**

Stress field	$S_v$	$SH_{max}$		$Sh_{min}$	
	MPa/km	MPa/km	Azimuth ( $^\circ$ )	MPa/km	Azimuth ( $^\circ$ )
A	23	20	140	16	50
B	23	20	100	16	10
C	23	22	50	16	140


#### 4 Geomechanical controls on vertical fluid migration

The results of the geomechanical analysis of the Coyote Wash Fault highlight that the orientation of the stress field has a major impact on both the slip tendency (Fig. 6) and fracture stability (Fig. 7). Slip tendency indicates that for stress field A most parts of the fault are close to failure ( $T_s > 0.5$ ), for stress field B the fault is only intermediately stressed ( $0.3 < T_s < 0.5$ ), and for stress field C the fault is far away from failure ( $T_s < 0.2$ ). Similarly, only slight increases of pore pressure are needed to force the fault into failure under stress fields A and B and a low friction fault rock (0.95 MPa and 1.33 MPa, respectively). The pore pressure increase needed to force the fault into failure in case of stress field C is much higher at 6.21 MPa. Note that slip tendency in both stress fields A and B is higher at the NW tip of the fault than in the SE section of the fault (Fig. 6), indicating that failure

245 is more likely to occur in the NW. This is also true for the spatial distribution of fracture stability which for stress fields A and C (most and least likely to fail) and a low friction fault rock is illustrated in Figure 7.

The results of the geomechanical analysis show that the bounding fault of the St. Johns Dome CO<sub>2</sub> reservoir is intermediately to critically stressed for two of the three modelled stress fields (A and B). For the same stress fields a low friction fault rock within the Coyote Wash Fault zone results in fracture stabilities which range from less than 1 MPa to 1.33 MPa. The most  
250 critically stressed areas are located at the NW tip of the fault (Salado Springs) while the SE part of the fault is relatively stable for all studied stress fields.

The  $F_s$  values of 0.95 MPa and 1.33 MPa for low friction fault rock translate to an additional CO<sub>2</sub> column of ~110 m and ~160 m, respectively. Currently the reservoir is not filled-to-spill and the 3D geological model indicates that the reservoir interval at the NW part of the fault could retain an additional ~150 m of CO<sub>2</sub> column. Whilst a fault does not need to be  
255 critically stressed to be hydraulically conductive, the additional filling of the reservoir with a third to half more CO<sub>2</sub> by volume could potentially lead to fault failure and vertical fluid migration along the fault. Evidence that the reservoir has held more CO<sub>2</sub> in the past is provided by older travertine deposits located outside the present day extent of the subsurface reservoir (Figs. 2 & 3, Miocic et al., 2019a) and the fact that higher paleo-reservoir pressures have been implied by a geochemical study (Moore et al., 2005). These higher reservoir pressures were likely enough to bring the NW part of the fault close to failure and  
260 we suggest that the permeability of fracture networks within the critically stressed fault damage zone was therefore increased (Barton et al., 1995; Ito and Zoback, 2000; Min et al., 2004). In order to sustain the long periods of leakage recorded by the spatially stable travertine deposition the fault must be critically stressed for similarly long periods. Indeed, volume calculations on how much CO<sub>2</sub> must have leaked to the surface based on the travertine deposits show that one to two orders of magnitude more CO<sub>2</sub> was lost from the reservoir than it can hold (Miocic et al., 2019a). It is suggested that the continuous influx of  
265 magmatic CO<sub>2</sub> degassing from beneath the Springerville Volcanic Field into the reservoir caused the fault to be close to being critically stressed – a reasoning also supported by this study.

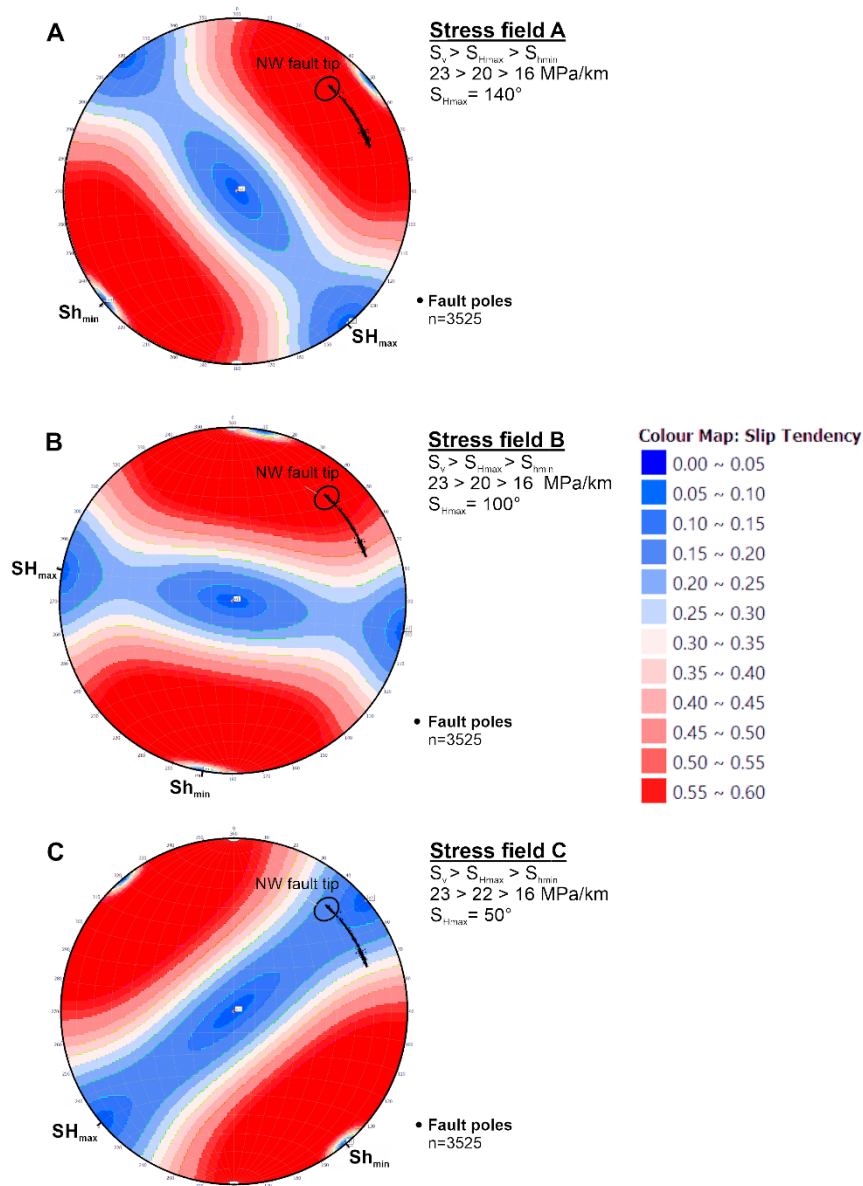


270 **Figure 6: Stereoplots illustrating the slip tendency for the Coyote Wash Fault (black dots) for the three different stress fields. The fault is at least partly close to failure for stress fields A and B while stress field C results in very low slip tendencies. Particularly the NW fault tip (indicated on the stereoplots) where travertine deposits are found at the surface is close to failure.**


The geomechanical analysis also demonstrates that a change of the fault orientation within the stress field should not be underestimated and can lead to failure along one part of a fault while large parts of the fault are geomechanically stable. The strike direction of the Coyote Wash Fault changes from ESE-WNW in the southern part of the fault to NW-SE in the northern

section and this change in strike is enough to render the northern section critically stressed (in two of the stress fields modelled; 275 A & B) - with leakage pathways being the result (Fig. 9). Higher paleo gas columns within the reservoir likely contributed the forcing the fault into failure at the northern fault tip. However, some sections of the fault in the SE also have relatively low fracture stability values (Fig. 8A) which translate to only 10's of meters more supported gas column than the NW section. Yet, there are no indications for past or present leakage in the SE part of the St. Johns Dome. We argue that the stress field orientation in the SE is different from the stress field orientation in the NW area of the St. Johns Dome and that as a result the 280 fault is far from failure towards its SE tip. This is supported by stress field measurements in the vicinity of the southern edge of the reservoir (Fig. 2, Tab. 1) which imply a NE-SW  $S_{H_{max}}$  orientation.

Vertical migration of fluids through fault and fracture networks or corridors can be classified by their location in (1) the fault damage zone, (2) at the fault tip, and (3) at the crest of a fold (Ogata et al., 2014). As evidenced by travertine deposits vertical fluid migration at the St. Johns Dome occurred at all three types of fracture networks (Fig. 2), but considerably larger volumes 285 of fluid migrated through fracture networks linked to faults, particular at their NW tips. This indicates that, at least at this site, faults are a higher risk factor for leakage than other migration pathways such as fracture networks along the anticline structure or capillary leakage through a caprock. Based on travertine volumes the largest volumes of leakage occurred at the NW tip of the Coyote Wash Fault, in the area between Lyman Lake and Salado Springs (Figs. 2, 8, Miodic et al., 2019a). This indicates high permeability fracture networks within the damage zone close to the fault tip as predicted by numerical models (Backers and Moeck, 2015; Zhang et al., 2008). The lack of similar leakage pathways observed at the SE tip of the fault can be attributed 290 to the different stress field orientation. For geological storage in general the occurrence of large-scale leakage at fault tips is also concerning as displacement at fault tips usually is low and as such fault tips are not seismically resolvable and may remain undetected. Thus seismically resolved faults could be extended beyond the normally picked extend to include the fault tips. Similarly, faults with low displacement such as the Buttes Fault, for which significant fault related leakage has been recorded 295 but is thought to have a maximum displacement of <25 m, may not be detectable on seismic data. This highlights the need for a good structural understanding of any geological storage site to ensure that fault tips and small faults are considered and incorporated, possibly as an additional uncertainty parameter, into the geological model.

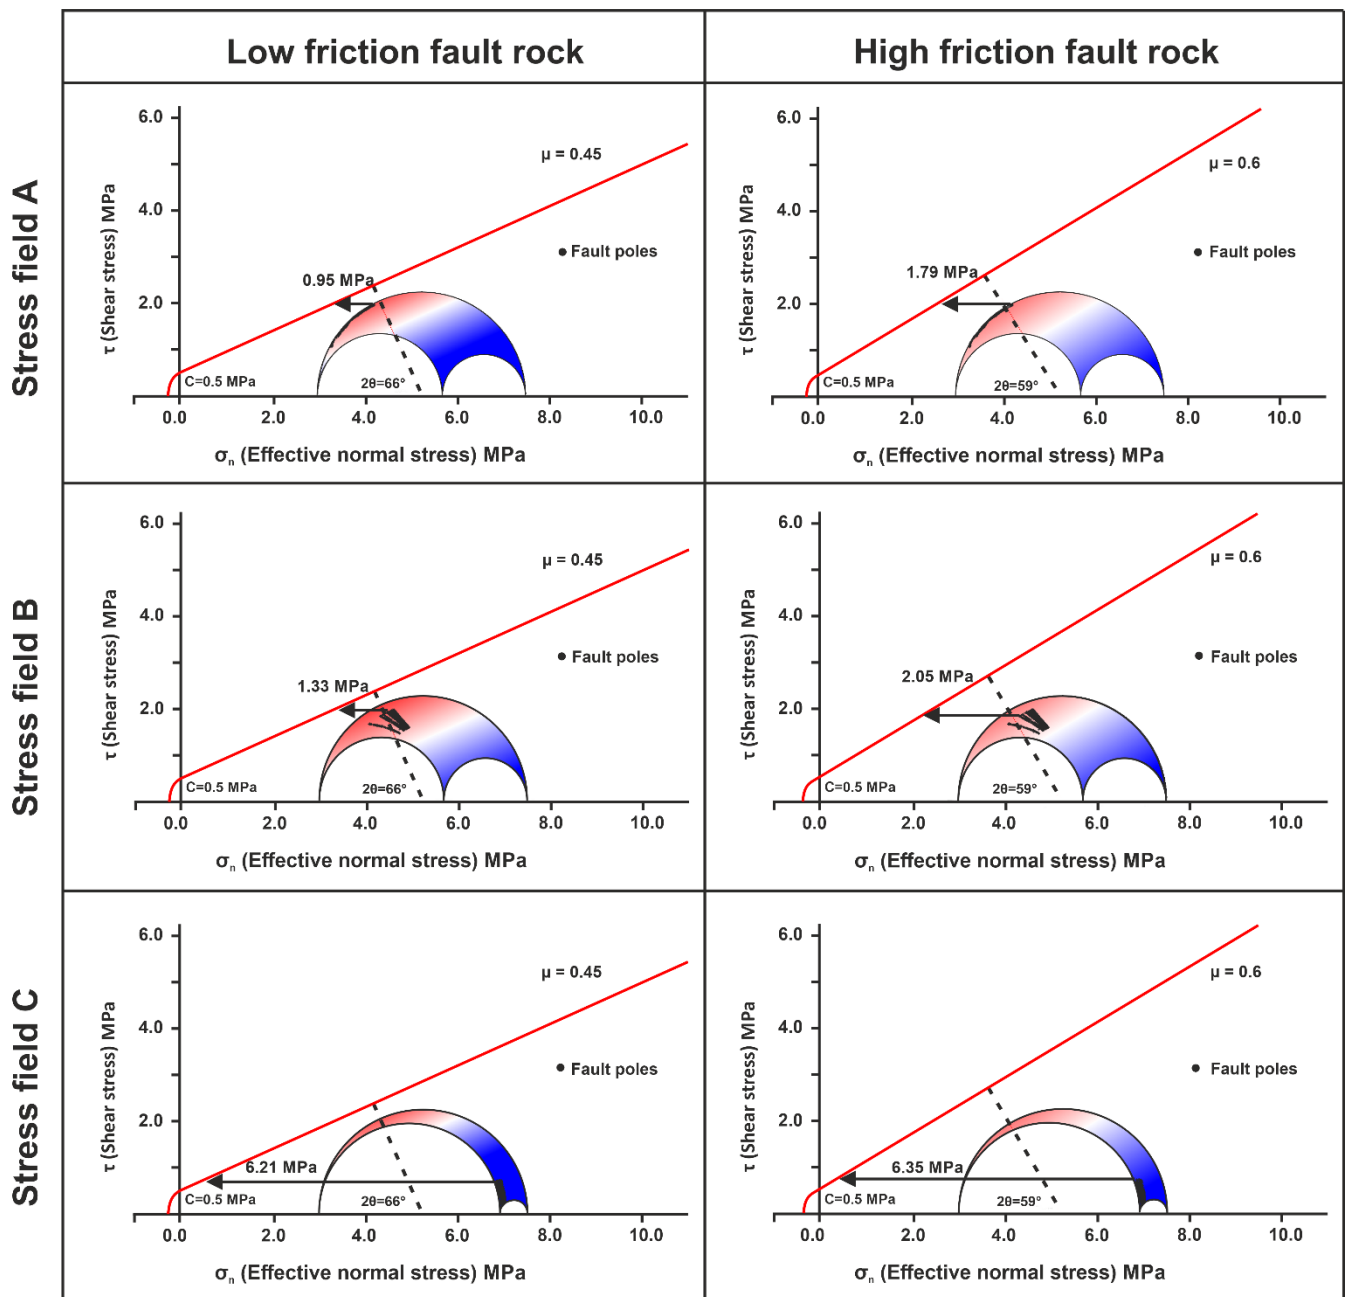


300 **Figure 7: Mohr diagrams illustrating the fracture stability for the Coyote Wash Fault within the three stress fields for two types of fault rocks. Black arrows indicate the increase in pore-pressure needed to force the fault into failure. Number of fault poles in each plot is 3525.**

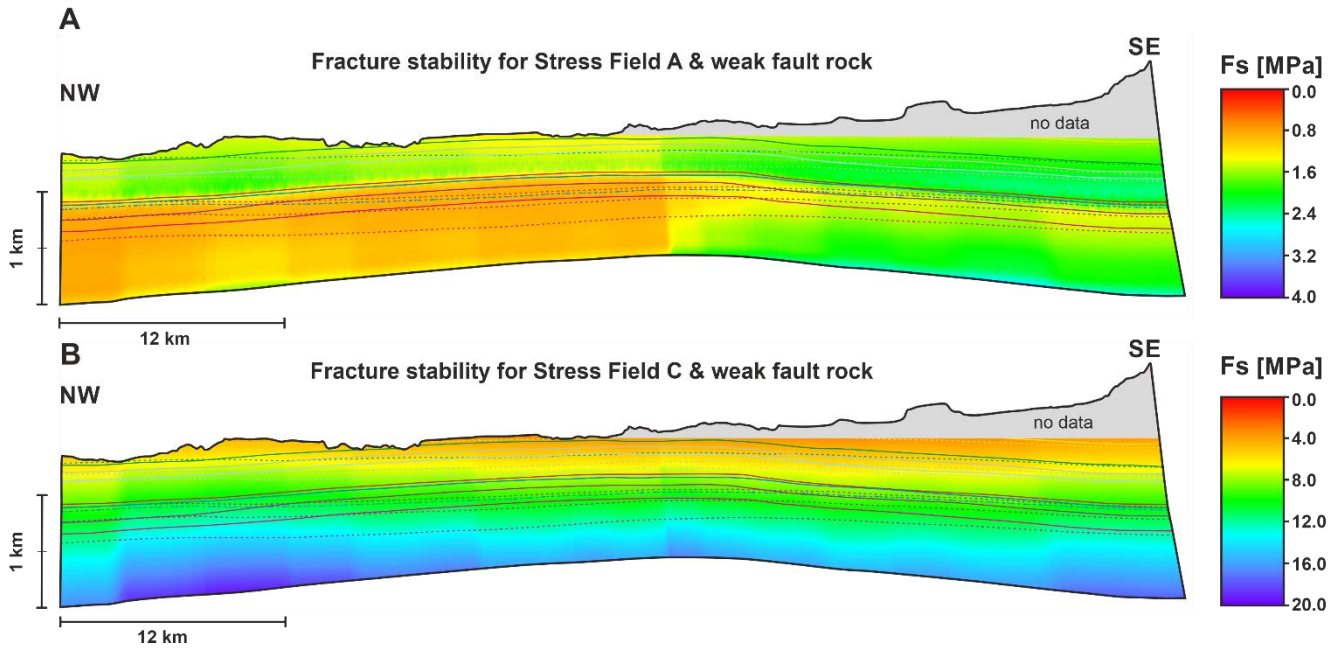

305 **Figure 8: Fracture stability plotted onto the Coyote Wash Fault surface. (A) for stress field A and a low friction fault rock. (B) For stress field C and a low friction fault rock. Note the differences in the colour scale.  $F_s$  is more critical in the NW part of the fault for stress field A while  $F_s$  for stress field C is far from critical. Dashed lines represent hangingwall, straight line footwall cut-off lines, see Figure 5 for stratigraphic context.**



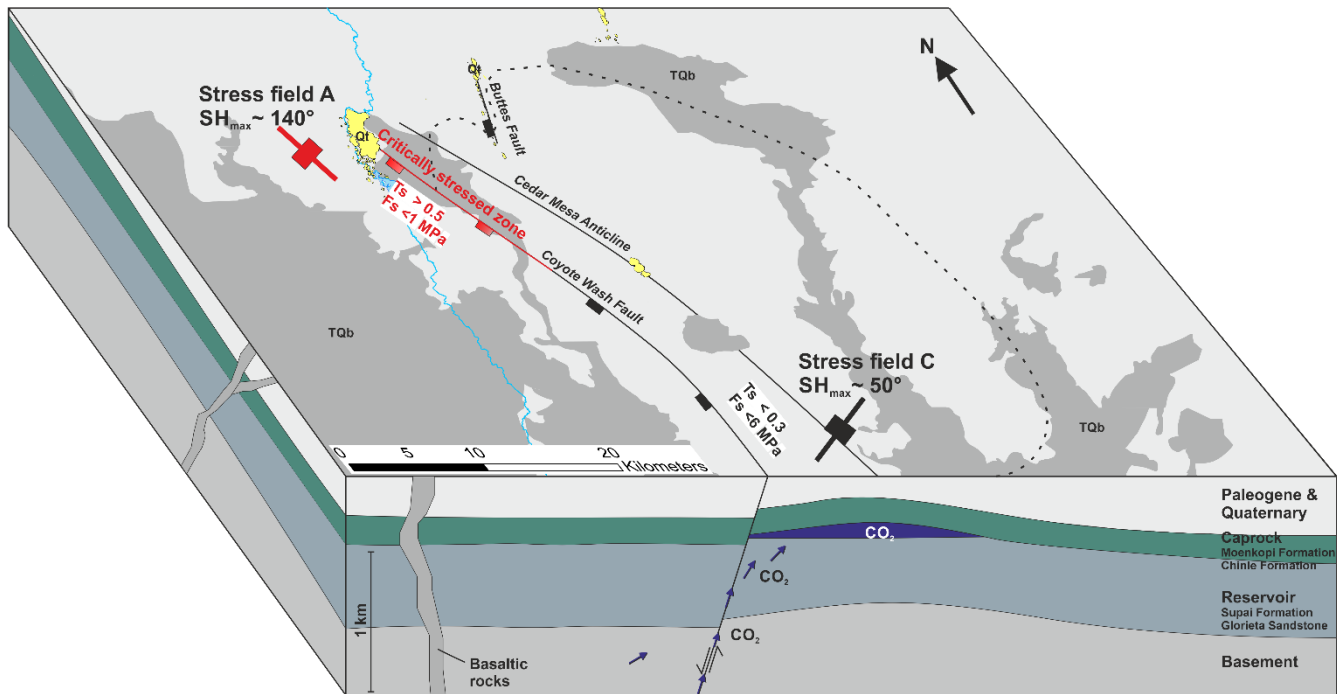

310 **Figure 9: Block diagram illustrating the geological setting of the St. Johns Dome area. The fault-bound CO<sub>2</sub> reservoir has been filled with CO<sub>2</sub> from depth and leakage of CO<sub>2</sub> from the reservoir to the surface occurs at the NW tip of the Coyote Wash Fault. The leakage is geomechanically controlled as the stress field orientation changes along the strike of the fault as well as the strike direction of the fault. At the NW tip of the fault slip stability values of >0.5 and fracture stability of less than 1 MPa indicate a critically stressed fault. See Figure 2 for a complete legend, ~10x vertical exaggeration.**

315 While the geomechanical analysis highlights the role of critically stressed faults for fluid migration at the St. Johns Dome, it is missing in situ stress field data from within the CO<sub>2</sub> reservoir. Such data is crucial for a detailed and reliable study of fracture and fault stability (e.g., Becker et al., 2019), however there are cases where such in-situ data is missing and a geomechanical analysis may be needed (Henk, 2005). In particular during the site selection and appraisal of subsurface storage sites a preliminary geomechanical analysis based on existing stress field data can identify potentially critically stressed faults. The

320 lack of in-situ data can be compensated by studying several plausible stress fields (as in this study) and including uncertainties into the geomechanical analysis (Ziegler and Heidbach, 2020). For the latter, uncertainties in the stress field orientation and magnitude and in the fault orientation should be included. Statistical approaches such as Bayesian or Markov Chain Monte Carlo modelling can be useful to identify uncertainty thresholds and to determine the precision by which the geomechanical parameters need to be known in order to have reliable fault and fracture stability predictions (Bao et al., 2013; Chiamonte et

325 al., 2008; McFarland et al., 2012).

For the geomechanical prediction of permeable fracture networks and thus leakage pathways at the St. Johns Dome the stress field orientation is integral. The location of the natural CO<sub>2</sub> reservoir at the edge of the Colorado Plateau is the likely reason for the stress field orientation change, with clear changes in crustal composition and strength in the vicinity of the St. Johns Dome (Hendricks and Plescia, 1991; Qashqai et al., 2016). The study area is also located at the intersection of the NE-NNE

330 trending Jemez Lineament, a tectonically active zone that is characterized by Paleogene-Quaternary extension and volcanism  
(Fig. 1), and the ESE trending Arizona Transition Zone (Aldrich and Laughlin, 1984; Kreemer et al., 2010). Additionally, the  
presence of salt deposits in the Holbrook Basin north of the study area may also impact the local stress field (Neal and Colpitts,  
1997; Rauzi, 2000). The complex regional setting at the St. Johns Dome and the associated uncertainties for geomechanical  
modelling further highlight the need for thorough site selection criteria for engineered fluid storage sites and adequate  
335 geological data to ensure that only reservoirs with well understood structural frameworks are chosen.

## **5 Implications for geological storage applications**

Geomechanical modelling suggests that vertical fluid migration from the reservoir to the surface at the St. Johns Dome natural  
CO<sub>2</sub> reservoir is controlled by fracture networks in the damage zone and tip of near-critically stressed faults. We propose that  
regular filling of the reservoir with CO<sub>2</sub> from mantle sources increased the pore pressure within the reservoir and further  
340 reduced the stability of near critically stressed faults, leading to the leakage of large volumes of CO<sub>2</sub> over the time-span of  
several 100 kas. While the leakage rates at the St. Johns Dome are low enough to render the faulted site an adequate CO<sub>2</sub> store  
for climate mitigation, similar leakage rates could impede geological storage of methane or hydrogen, in particularly at onshore  
storage sites, based on socially and operationally acceptable criteria.

For fault-bound subsurface storage sites for CO<sub>2</sub> or other fluids the history of geomechanically controlled leakage at the St.  
345 Johns Dome clearly illustrates the need for a good understanding of regional and local stress fields and faults. In particular the  
stress state of faults and fault related fracture networks prior to fluid injection needs to be well understood in order to reduce  
the risk of vertical fluid migration through fractured caprock. We recommended to select areas where there are no significant  
regional stress field changes as these complicate geomechanical predictions. Indeed, in situ stress data from wells are key for  
any advanced leakage risk prognosis. To further understand the leakage mechanisms at the St. Johns Dome geomechanical  
350 modelling of the Buttes Fault, combined with an uncertainty assessment, is recommended. More detailed dating of the  
travertine deposits could reveal at which part of the faults (fault tip vs fault damage zone) failure occurred first and provide  
insights into the time dynamics of leakage.

## **Author contribution**

JM and SG designed the research project which was carried out by JM with help from GJ and input from SG. JM prepared the  
355 manuscript with contributions from all co-authors.

## **Competing interests**

The authors declare that they have no conflict of interest.

## Acknowledgements

We thank Badley Geoscience Limited for providing an educational licence of TrapTester® and Petroleum Experts/Midland  
360 Valley for providing an educational licence of Move™. JM was partly supported by the European Commission PANACEA  
project (grant no. 282900), GJ was supported by EPSRC Grant EP/P026214/1 and University of Strathclyde Faculty of  
Engineering and SG was partly supported by NERC fellowship NE/G015163/1, NERC Grant NE/L008475/1 and EPSRC  
Grants EP/P026214/1, EP/K036033/1 and EP/K000446/1. The paper greatly benefited from constructive reviews by Allan  
Morris and Johnathon Osmond as well as a short comment by Mark Mulrooney.

## 365 References

- Alcalde, J., Flude, S., Wilkinson, M., Johnson, G., Edlmann, K., Bond, C. E., Scott, V., Gilfillan, S. M. V., Ogaya, X. and  
Haszeldine, R. S.: Estimating geological CO<sub>2</sub> storage security to deliver on climate mitigation, *Nature Communications*, 9(1),  
2201, <http://doi.org/10.1038/s41467-018-04423-1>, 2018.
- Aldrich, M. J. and Laughlin, A. W.: A model for the tectonic development of the Southeastern Colorado Plateau Boundary,  
370 *Journal of Geophysical Research: Solid Earth*, 89(B12), 10207–10218, <http://doi.org/10.1029/JB089iB12p10207>, 1984.
- Allan, U. S.: Model for hydrocarbon migration and entrapment within faulted structures, *AAPG bulletin*, 73(7), 803–811,  
1989.
- Allis, R., Bergfeld, D., Moore, J., McClure, K., Morgan, C., Chidsey, T., Heath, J. and McPherson, B.: Implications of results  
from CO<sub>2</sub> flux surveys over known CO<sub>2</sub> systems for long-term monitoring, in *Fourth Annual Conference on Carbon Capture  
375 and Sequestration.*, 2005.
- Allis, R. G., Moore, J. and White, S. P.: Reactive Multiphase behavior of CO<sub>2</sub> in Saline Aquifers beneath the Colorado Plateau,  
*Quarterly Technical Report*, University of Utah, Salt Lake City., 2004.
- Asquith, G. B. and Krygowski, D.: *Basic Well Log Analysis*, 2nd ed., AAPG., 2004.
- Backers, T. and Moeck, I.: Fault tips as favorable drilling targets for geothermal prospecting—a fracture mechanical perspective,  
380 *International Society for Rock Mechanics and Rock Engineering.*, 2015.
- Bao, J., Xu, Z., Lin, G. and Fang, Y.: Evaluating the impact of aquifer layer properties on geomechanical response during CO<sub>2</sub>  
geological sequestration, *Computers & Geosciences*, 54, 28–37, <http://doi.org/10.1016/j.cageo.2013.01.015>, 2013.
- Barton, C. A., Zoback, M. D. and Moos, D.: Fluid flow along potentially active faults in crystalline rock, *Geology*, 23(8), 683–  
686, [http://www.doi.org/10.1130/0091-7613\(1995\)023<0683:FFAPAF>2.3.CO;2](http://www.doi.org/10.1130/0091-7613(1995)023<0683:FFAPAF>2.3.CO;2), 1995.
- 385 Bashir, L., Gao, S. S., Liu, K. H. and Mickus, K.: Crustal structure and evolution beneath the Colorado Plateau and the southern  
Basin and Range Province: Results from receiver function and gravity studies, *Geochem. Geophys. Geosyst.*, 12(6), Q06008,  
[doi:10.1029/2011GC003563](http://doi.org/10.1029/2011GC003563), 2011.
- Becker, I., Müller, B., Bastian, K., Jelinek, W. and Hilgers, C.: Present-day stress control on fluid migration pathways: Case  
study of the Zechstein fractured carbonates, NW-Germany - *ScienceDirect, Marine and Petroleum Geology*, 103, 320–330,  
390 [doi: https://doi.org/10.1016/j.marpetgeo.2019.03.002](http://doi.org/10.1016/j.marpetgeo.2019.03.002), 2019.

- Bond, C. E., Wightman, R. and Ringrose, P. S.: The influence of fracture anisotropy on CO<sub>2</sub> flow, *Geophys. Res. Lett.*, 40(7), 1284–1289, doi:10.1002/grl.50313, 2013.
- Bond, C. E., Kremer, Y., Johnson, G., Hicks, N., Lister, R., Jones, D. G., Haszeldine, R. S., Saunders, I., Gilfillan, S. M. V., Shipton, Z. K. and Pearce, J.: The physical characteristics of a CO<sub>2</sub> seeping fault: The implications of fracture permeability for carbon capture and storage integrity, *Int. J. Greenh. Gas Con.*, 61, 49–60, <https://doi.org/10.1016/j.ijggc.2017.01.015>, 2017.
- 395 Brogi, A., Capezzuoli, E., Aqué, R., Branca, M. and Voltaggio, M.: Studying travertines for neotectonics investigations: Middle–Late Pleistocene syn-tectonic travertine deposition at Serre di Rapolano (Northern Apennines, Italy), *Int J Earth Sci (Geol Rundsch)*, 99(6), 1383–1398, <https://doi.org/10.1007/s00531-009-0456-y>, 2010.
- Burnside, N. M., Shipton, Z. K., Dockrill, B. and Ellam, R. M.: Man-made versus natural CO<sub>2</sub> leakage: A 400 k.y. history of an analogue for engineered geological storage of CO<sub>2</sub>, *Geology*, 41(4), 471–474, <https://doi.org/10.1130/G33738.1>, 2013.
- 400 Byerlee, J.: Friction of rocks, *PAGEOPH*, 116(4–5), 615–626, <https://doi.org/10.1007/BF00876528>, 1978.
- Caillet, G.: The caprock of the Snorre Field, Norway: a possible leakage by hydraulic fracturing, *Marine and Petroleum Geology*, 10(1), 42–50, [https://doi.org/10.1016/0264-8172\(93\)90098-D](https://doi.org/10.1016/0264-8172(93)90098-D), 1993.
- Caine, J. S., Evans, J. P. and Forster, C. B.: Fault zone architecture and permeability structure, *Geology*, 24(11), 1025–1028, 1996.
- 405 Cappa, F.: Modelling fluid transfer and slip in a fault zone when integrating heterogeneous hydromechanical characteristics in its internal structure, *Geophys. J. Int.*, 178(3), 1357–1362, <https://doi.org/10.1111/j.1365-246X.2009.04291.x>, 2009.
- Cavanagh, A. J., Haszeldine, R. S. and Nazarian, B.: The Sleipner CO<sub>2</sub> storage site: using a basin model to understand reservoir simulations of plume dynamics, *First Break*, 33(6), 61–68, 2015.
- 410 Chadwick, A., Arts, R., Bernstone, C., May, F., Thibeau, S. and Zweigel, P.: Best practice for the storage of CO<sub>2</sub> in saline aquifers - observations and guidelines from the SACS and CO<sub>2</sub>STORE projects, British Geological Survey, Nottingham, UK., 2008.
- Chester, F. M. and Logan, J. M.: Implications for mechanical properties of brittle faults from observations of the Punchbowl fault zone, California, *PAGEOPH*, 124(1–2), 79–106, <https://doi.org/10.1007/BF00875720>, 1986.
- 415 Chiamonte, L., Zoback, MarkD., Friedmann, J. and Stamp, V.: Seal integrity and feasibility of CO<sub>2</sub> sequestration in the Teapot Dome EOR pilot: geomechanical site characterization, *Environ Geol*, 54(8), 1667–1675, <https://doi.org/10.1007/s00254-007-0948-7>, 2008.
- Choi, J.-H., Edwards, P., Ko, K. and Kim, Y.-S.: Definition and classification of fault damage zones: A review and a new methodological approach, *Earth-Science Reviews*, 152, 70–87, <https://doi.org/10.1016/j.earscirev.2015.11.006>, 2016.
- 420 Condit, C. D. and Connor, C. B.: Recurrence rates of volcanism in basaltic volcanic fields: An example from the Springerville volcanic field, Arizona, *Geological Society of America Bulletin*, 108(10), 1225–1241, [https://doi.org/10.1130/0016-7606\(1996\)1082.3.CO;2](https://doi.org/10.1130/0016-7606(1996)1082.3.CO;2), 1996.
- Condit, C. D., Crumpler, L. S. and Aubele, J. C.: Lithologic, age group, magnetopolarity, and geochemical maps of the Springerville Volcanic Field, East-Central Arizona, U.S. Dept. of the Interior, U.S. Geological Survey., 1993.

- 425 Connor, C. B., Condit, C. D., Crumpler, L. S. and Aubele, J. C.: Evidence of regional structural controls on vent distribution: Springerville Volcanic Field, Arizona, *J. Geophys. Res.*, 97(B9), 12349–12359, <https://doi.org/10.1029/92JB00929>, 1992.
- Crumpler, L. S., Aubele, J. C. and Condit, C. D.: Volcanics and neotectonic characteristics of the Springerville volcanic field, Arizona, in *New Mexico Geological Society Guidebook, 45th Field Conference*, edited by R. M. Chamberlin, B. S. Kues, S. M. Cather, J. M. Barker, and W. C. McIntosh, pp. 147–164., 1994.
- 430 Davatzes, N. C. and Aydin, A.: Distribution and nature of fault architecture in a layered sandstone and shale sequence: An example from the Moab fault, Utah, *AAPG Memoir*, (85), 153–180, 2005.
- Dockrill, B. and Shipton, Z. K.: Structural controls on leakage from a natural CO<sub>2</sub> geologic storage site: Central Utah, U.S.A., *Journal of Structural Geology*, 32(11), 1768–1782, <https://doi.org/10.1016/j.jsg.2010.01.007>, 2010.
- 435 Eichhubl, P., Davatz, N. C. and Becker, S. P.: Structural and diagenetic control of fluid migration and cementation along the Moab fault, Utah, *AAPG Bulletin*, 93(5), 653–681, <https://doi.org/10.1306/02180908080>, 2009.
- Embid, E. H.: U-series dating, geochemistry, and geomorphic studies of travertines and springs of the Springerville area, east-central Arizona, and tectonic implications, MSc thesis, The University of New Mexico, Albuquerque., 2009.
- Faulkner, D. R. and Rutter, E. H.: Can the maintenance of overpressured fluids in large strike-slip fault zones explain their apparent weakness?, *Geology*, 29(6), 503–506, [https://doi.org/10.1130/0091-7613\(2001\)029<0503:CTMOOF>2.0.CO;2](https://doi.org/10.1130/0091-7613(2001)029<0503:CTMOOF>2.0.CO;2), 2001.
- 440 Faulkner, D. R., Lewis, A. C. and Rutter, E. H.: On the internal structure and mechanics of large strike-slip fault zones: field observations of the Carboneras fault in southeastern Spain, *Tectonophysics*, 367(3–4), 235–251, [https://doi.org/10.1016/S0040-1951\(03\)00134-3](https://doi.org/10.1016/S0040-1951(03)00134-3), 2003.
- Faulkner, D. R., Jackson, C. A. L., Lunn, R. J., Schlische, R. W., Shipton, Z. K., Wibberley, C. A. J. and Withjack, M. O.: A review of recent developments concerning the structure, mechanics and fluid flow properties of fault zones, *J. Struct. Geol.*, 32(11), 1557–1575, <https://doi.org/10.1016/j.jsg.2010.06.009>, 2010.
- 445 Fernandez, O., Jones, S., Armstrong, N., Johnson, G., Ravaglia, A. and Muñoz, J. A.: Automated tools within workflows for 3D structural construction from surface and subsurface data, *Geoinformatica*, 13(3), 291, <https://doi.org/10.1007/s10707-008-0059-y>, 2008.
- 450 Frery, E., Gratier, J.-P., Ellouz-Zimmerman, N., Loiselet, C., Braun, J., Deschamps, P., Blamart, D., Hamelin, B. and Swennen, R.: Evolution of fault permeability during episodic fluid circulation: Evidence for the effects of fluid–rock interactions from travertine studies (Utah–USA), *Tectonophysics*, <https://doi.org/10.1016/j.tecto.2015.03.018>, 2015.
- Gilfillan, S., Haszedline, S., Stuart, F., Gyore, D., Kilgallon, R. and Wilkinson, M.: The application of noble gases and carbon stable isotopes in tracing the fate, migration and storage of CO<sub>2</sub>, *Energy Procedia*, 63, 4123–4133, <https://doi.org/10.1016/j.egypro.2014.11.443>, 2014.
- 455 Gilfillan, S. M. V., Ballentine, C. J., Holland, G., Blagburn, D., Lollar, B. S., Stevens, S., Schoell, M. and Cassidy, M.: The noble gas geochemistry of natural CO<sub>2</sub> gas reservoirs from the Colorado Plateau and Rocky Mountain provinces, USA, *Geochim Cosmochim.*, 72(4), 1174–1198, <https://doi.org/10.1016/j.gca.2007.10.009>, 2008.
- 460 Gilfillan, S. M. V., Lollar, B. S., Holland, G., Blagburn, D., Stevens, S., Schoell, M., Cassidy, M., Ding, Z., Zhou, Z., Lacrampe-Couloume, G. and Ballentine, C. J.: Solubility trapping in formation water as dominant CO<sub>2</sub> sink in natural gas fields, *Nature*, 458(7238), 614–618, <https://doi.org/10.1038/nature07852>, 2009.

- Gilfillan, S. M. V., Wilkinson, M., Haszeldine, R. S., Shipton, Z. K., Nelson, S. T. and Poreda, R. J.: He and Ne as tracers of natural CO<sub>2</sub> migration up a fault from a deep reservoir, *International Journal of Greenhouse Gas Control*, 5(6), 1507–1516, <https://doi.org/10.1016/j.ijggc.2011.08.008>, 2011.
- 465 Guglielmi, Y., Cappa, F. and Amtrano, D.: High-definition analysis of fluid-induced seismicity related to the mesoscale hydromechanical properties of a fault zone, *Geophys. Res. Lett.*, 35(6), L06306, <https://doi.org/10.1029/2007GL033087>, 2008.
- Handin, J., Hager, R. V., Friedman, M. and Feather, J. N.: Experimental deformation of sedimentary rocks under confining pressure; pore pressure tests, *AAPG Bulletin*, 47(5), 717–755, 1963.
- 470 Harris, R. C.: A review and bibliography of karst features of the Colorado Plateau, Arizona, Open-File Report, Arizona Geological Survey., 2002.
- Heidbach, O., Rajabi, M., Reiter, K., Ziegler, M. and WSM Team: World Stress Map Database Release 2016. V.1.1., GFZ Data Service, <http://doi.org/10.5880/WSM.2016.001>, 2016.
- Hendricks, J. D. and Plescia, J. B.: A review of the regional geophysics of the Arizona Transition Zone, *Journal of Geophysical Research: Solid Earth*, 96(B7), 12351–12373, 1 <https://doi.org/10.1029/90JB01781>, 1991.
- 475 Henk, A.: Pre-drilling prediction of the tectonic stress field with geomechanical models, *First Break*, 23(11), 53–57, 2005.
- Hickman, S., Sibson, R. and Bruhn, R.: Introduction to Special Section: Mechanical Involvement of Fluids in Faulting, *J. Geophys. Res.*, 100(B7), 12831–12840, <https://doi.org/10.1029/95JB01121>, 1995.
- Hillis, R. R.: Pore pressure/stress coupling and its implications for rock failure, Geological Society, London, Special Publications, 216(1), 359–368, <https://doi.org/10.1144/GSL.SP.2003.216.01.23>, 2003.
- 480 IEA GHG: CCS Site Characterisation Criteria, IEA Greenhouse Gas R&D Programme., 2009.
- IPCC: IPCC Special report on Carbon Dioxide Capture and Storage, Cambridge University Press, New York, USA Cambridge, UK., 2005.
- Ito, T. and Zoback, M. D.: Fracture permeability and in situ stress to 7 km depth in the KTB scientific drillhole, *Geophysical Research Letters*, 27(7), 1045–1048, <https://doi.org/10.1029/1999GL011068>, 2000.
- 485 Karolytė, R., Johnson, G., Yielding, G. and Gilfillan, S. M. V.: Fault seal modelling – the influence of fluid properties on fault sealing capacity in hydrocarbon and CO<sub>2</sub> systems, *Petroleum Geoscience*, <https://doi.org/10.1144/petgeo2019-126>, 2020.
- Keating, E., Newell, D., Dempsey, D. and Pawar, R.: Insights into interconnections between the shallow and deep systems from a natural CO<sub>2</sub> reservoir near Springerville, Arizona, *International Journal of Greenhouse Gas Control*, 25, 162–172, <https://doi.org/10.1016/j.ijggc.2014.03.009>, 2014.
- 490 Kreemer, C., Blewitt, G. and Bennett, R. A.: Present-day motion and deformation of the Colorado Plateau, *Geophys. Res. Lett.*, 37(10), L10311, <https://doi.org/10.1029/2010GL043374>, 2010.
- 495 Lehner, F. K. and Pilaar, W. F.: The emplacement of clay smears in synsedimentary normal faults: inferences from field observations near Frechen, Germany, in *Norwegian Petroleum Society Special Publications*, vol. Volume 7, edited by P. Møller-Pedersen and A.G. Koestler, pp. 39–50, Elsevier. [online] Available from: <http://www.sciencedirect.com/science/article/pii/S0928893797800057>, 1997.

- Lindsay, N. G., Murphy, F. C., Walsh, J. J. and Watterson, J.: Outcrop Studies of Shale Smears on Fault Surface, in *The Geological Modelling of Hydrocarbon Reservoirs and Outcrop Analogues*, pp. 113–123, Blackwell Publishing Ltd. [online] Available from: <http://dx.doi.org/10.1002/9781444303957.ch6>, 1993.
- 500 Marshak, S., Karlstrom, K. and Timmons, J. M.: Inversion of Proterozoic extensional faults: An explanation for the pattern of Laramide and Ancestral Rockies intracratonic deformation, United States, *Geology*, 28(8), 735–738, [https://doi.org/10.1130/0091-7613\(2000\)28<735:IOPEFA>2.0.CO;2](https://doi.org/10.1130/0091-7613(2000)28<735:IOPEFA>2.0.CO;2), 2000.
- Matos, C. R., Carneiro, J. F. and Silva, P. P.: Overview of Large-Scale Underground Energy Storage Technologies for Integration of Renewable Energies and Criteria for Reservoir Identification, *Journal of Energy Storage*, 21, 241–258, <https://doi.org/10.1016/j.est.2018.11.023>, 2019.
- 505 McFarland, J. M., Morris, A. P. and Ferrill, D. A.: Stress inversion using slip tendency, *Computers & Geosciences*, 41, 40–46, <https://doi.org/10.1016/j.cageo.2011.08.004>, 2012.
- Michael, K., Golab, A., Shulakova, V., Ennis-King, J., Allinson, G., Sharma, S. and Aiken, T.: Geological storage of CO<sub>2</sub> in saline aquifers—A review of the experience from existing storage operations, *International Journal of Greenhouse Gas Control*, 4(4), 659–667, <https://doi.org/10.1016/j.ijggc.2009.12.011>, 2010.
- 510 Michie, E. a. H., Yielding, G. and Fisher, Q. J.: Predicting transmissibilities of carbonate-hosted fault zones, *Geological Society, London, Special Publications*, 459(1), 121–137, <https://doi.org/10.1144/SP459.9>, 2018.
- Min, K.-B., Rutqvist, J., Tsang, C.-F. and Jing, L.: Stress-dependent permeability of fractured rock masses: a numerical study, *International Journal of Rock Mechanics and Mining Sciences*, 41(7), 1191–1210, <https://doi.org/10.1016/j.ijrmms.2004.05.005>, 2004.
- 515 Miodic, J. M., Gilfillan, S. M. V., Roberts, J. J., Edlmann, K., McDermott, C. I. and Haszeldine, R. S.: Controls on CO<sub>2</sub> storage security in natural reservoirs and implications for CO<sub>2</sub> storage site selection, *Int. J. Greenh. Gas Con.*, 51, 118–125, <https://doi.org/10.1016/j.ijggc.2016.05.019>, 2016.
- Miodic, J. M., Gilfillan, S. M. V., Frank, N., Schroeder-Ritzrau, A., Burnside, N. M. and Haszeldine, R. S.: 420,000 year assessment of fault leakage rates shows geological carbon storage is secure, *Sci. Rep.*, 9(1), 769, <https://doi.org/10.1038/s41598-018-36974-0>, 2019a.
- 520 Miodic, J. M., Johnson, G. and Bond, C. E.: Uncertainty in fault seal parameters: implications for CO<sub>2</sub> column height retention and storage capacity in geological CO<sub>2</sub> storage projects, *Solid Earth*, 10(3), 951–967, <https://doi.org/10.5194/se-10-951-2019>, 2019b.
- Mitchell, T. M. and Faulkner, D. R.: The nature and origin of off-fault damage surrounding strike-slip fault zones with a wide range of displacements: A field study from the Atacama fault system, northern Chile, *Journal of Structural Geology*, 31(8), 802–816, <https://doi.org/10.1016/j.jsg.2009.05.002>, 2009.
- 525 Moeck, I., Kwiatek, G. and Zimmermann, G.: Slip tendency analysis, fault reactivation potential and induced seismicity in a deep geothermal reservoir, *Journal of Structural Geology*, 31(10), 1174–1182, <https://doi.org/10.1016/j.jsg.2009.06.012>, 2009.
- Moore, J., Adams, M., Allis, R., Lutz, S. and Rauzi, S.: Mineralogical and geochemical consequences of the long-term presence of CO<sub>2</sub> in natural reservoirs: An example from the Springerville–St. Johns Field, Arizona, and New Mexico, U.S.A., *Chemical Geology*, 217(3–4), 365–385, <https://doi.org/10.1016/j.chemgeo.2004.12.019>, 2005.
- 530 Morris, A., Ferrill, D. A. and Henderson, D. B.: Slip-tendency analysis and fault reactivation, *Geology*, 24(3), 275–278, 1996.

- Neal, J. T. and Colpitts, R. M.: Richard Lake, an evaporite-karst depression in the Holbrook Basin, Arizona, *Carbonates Evaporites*, 12(1), 91–97, <https://doi.org/10.1007/BF03175807>, 1997.
- 535 Ogata, K., Senger, K., Braathen, A. and Tveranger, J.: Fracture corridors as seal-bypass systems in siliciclastic reservoir-cap rock successions: Field-based insights from the Jurassic Entrada Formation (SE Utah, USA), *Journal of Structural Geology*, 66, 162–187, <https://doi.org/10.1016/j.jsg.2014.05.005>, 2014.
- Pluymakers, A. M. H. and Spiers, C. J.: Compaction creep of simulated anhydrite fault gouge by pressure solution: theory v. experiments and implications for fault sealing, *Geological Society, London, Special Publications*, 409, SP409.6, <https://doi.org/10.1144/SP409.6>, 2014.
- 540
- Priewisch, A., Crossey, L. J., Karlstrom, K. E., Polyak, V. J., Asmerom, Y., Nereson, A. and Ricketts, J. W.: U-series geochronology of large-volume Quaternary travertine deposits of the southeastern Colorado Plateau: Evaluating episodicity and tectonic and paleohydrologic controls, *Geosphere*, 10(2), 401–423, <https://doi.org/10.1130/GES00946.1>, 2014.
- Qashqai, M. T., Afonso, J. C. and Yang, Y.: The crustal structure of the Arizona Transition Zone and southern Colorado Plateau from multiobservable probabilistic inversion, *Geochemistry, Geophysics, Geosystems*, 17(11), 4308–4332, <https://doi.org/10.1002/2016GC006463>, 2016.
- 545
- Rauzi, S.: Carbon Dioxide in the St. Johns-Springerville Area, Apache County, Arizona, Open File Report, Arizona Geological Survey., 1999.
- Rauzi, S. L.: Permian Salt in the Holbrook Basin, Arizona, Open-File Report, Arizona Geological Survey., 2000.
- 550
- Rutqvist, J., Vasco, D. W. and Myer, L.: Coupled reservoir-geomechanical analysis of CO<sub>2</sub> injection and ground deformations at In Salah, Algeria, *International Journal of Greenhouse Gas Control*, 4(2), 225–230, <https://doi.org/10.1016/j.ijggc.2009.10.017>, 2010.
- Schulz, S. E. and Evans, J. P.: Spatial variability in microscopic deformation and composition of the Punchbowl fault, southern California: implications for mechanisms, fluid–rock interaction, and fault morphology, *Tectonophysics*, 295(1–2), 223–244, [https://doi.org/10.1016/S0040-1951\(98\)00122-X](https://doi.org/10.1016/S0040-1951(98)00122-X), 1998.
- 555
- Scott, V., Gilfillan, S., Markusson, N., Chalmers, H. and Haszeldine, R. S.: Last chance for carbon capture and storage, *Nature Clim. Change*, 3(2), 105–111, 2013.
- Shipton, Z. K., Evans, J. P., Robeson, K. R., Forster, C. B. and Snelgrove, S.: Structural Heterogeneity and Permeability in Faulted Eolian Sandstone: Implications for Subsurface Modeling of Faults, *AAPG Bulletin*, 86(5), 863–883, <https://doi.org/10.1306/61EEDBC0-173E-11D7-8645000102C1865D>, 2002.
- 560
- Shipton, Z. K., Evans, J. P., Kirschner, D., Kolesar, P. T., Williams, A. P. and Heath, J.: Analysis of CO<sub>2</sub> leakage through ‘low-permeability’ faults from natural reservoirs in the Colorado Plateau, east-central Utah, *Geological Society, London, Special Publications*, 233(1), 43–58, <https://doi.org/10.1144/GSL.SP.2004.233.01.05>, 2004.
- Sibson, R. H.: Conditions for fault-valve behaviour, *Geological Society, London, Special Publications*, 54(1), 15–28, <https://doi.org/10.1144/GSL.SP.1990.054.01.02>, 1990.
- 565
- Sibson, R. H.: Brittle-failure controls on maximum sustainable overpressure in different tectonic regimes, *AAPG Bulletin*, 87(6), 901–908, 2003.
- Sirrinc, G. K.: Geology of the Springerville-St. Johns area, Apache County, Arizona, PhD thesis, University of Texas., 1958.



- 570 Soden, A. M., Shipton, Z. K., Lunn, R. J., Pytharouli, S. I., Kirkpatrick, J. D., Do Nascimento, A. F. and Bezerra, F. H. R.: Brittle structures focused on subtle crustal heterogeneities: implications for flow in fractured rocks, *Journal of the Geological Society*, 171(4), 509–524, <https://doi.org/10.1144/jgs2013-051>, 2014.
- Song, J. and Zhang, D.: Comprehensive Review of Caprock-Sealing Mechanisms for Geologic Carbon Sequestration, *Environ. Sci. Technol.*, 47(1), 9–22, <https://doi.org/10.1021/es301610p>, 2012.
- 575 Stork, A. L., Verdon, J. P. and Kendall, J. M.: The microseismic response at the In Salah Carbon Capture and Storage (CCS) site, *International Journal of Greenhouse Gas Control*, 32, 159–171, <https://doi.org/10.1016/j.ijggc.2014.11.014>, 2015.
- Terzaghi, K.: Dei Berechnung der Durchlässigkeitsziffer des Tones aus dem Verlauf der Hydrodynamischen Spannungserscheinungen, *Sitzungsberichte der Akademie der Wissenschaften in Wien*, 132 3/4, 125–138, 1923.
- Vrolijk, P. J., Urai, J. L. and Kettermann, M.: Clay smear: Review of mechanisms and applications, *J. Struct. Geol.*, 86, 95–152, <https://doi.org/10.1016/j.jsg.2015.09.006>, 2016.
- 580 White, J. A., Chiaramonte, L., Ezzedine, S., Foxall, W., Hao, Y., Ramirez, A. and McNab, W.: Geomechanical behavior of the reservoir and caprock system at the In Salah CO<sub>2</sub> storage project, *Proceedings of the National Academy of Sciences*, 111(24), 8747–8752, 2014.
- Wiprut, D. and Zoback, M. D.: Fault reactivation and fluid flow along a previously dormant normal fault in the northern North Sea, *Geology*, 28(7), 595–598, [https://doi.org/10.1130/0091-7613\(2000\)28<595:FRAFFA>2.0.CO;2](https://doi.org/10.1130/0091-7613(2000)28<595:FRAFFA>2.0.CO;2), 2000.
- 585 Wong, I. G. and Humphrey, J.: Contemporary seismicity, faulting, and the state of stress in the Colorado Plateau, *Geological Society of America Bulletin*, 101(9), 1127–1146, [https://doi.org/10.1130/0016-7606\(1989\)101<1127:CSFATS>2.3.CO;2](https://doi.org/10.1130/0016-7606(1989)101<1127:CSFATS>2.3.CO;2), 1989.
- 590 Yielding, G. and Freeman, B.: 3-D Seismic-Structural Workflows – Examples Using the Hat Creek Fault System, in *3-D Structural Interpretation*, edited by B. Krantz, C. Ormand, and B. Freeman, pp. 155–171, American Association of Petroleum Geologists., 2016.
- Yielding, G., Freeman, B. and Needham, D. T.: Quantitative fault seal prediction, *AAPG Bulletin*, 81(6), 897–917, 1997.
- Zhang, Y., Schaub, P. M., Zhao, C., Ord, A., Hobbs, B. E. and Barnicoat, A. C.: Fault-related dilation, permeability enhancement, fluid flow and mineral precipitation patterns: numerical models, *Geological Society, London, Special Publications*, 299(1), 239–255, <https://doi.org/10.1144/SP299.15>, 2008.
- 595 Ziegler, M. O. and Heidbach, O.: The 3D stress state from geomechanical–numerical modelling and its uncertainties: a case study in the Bavarian Molasse Basin, *Geothermal Energy*, 8(1), 11, <https://doi.org/10.1186/s40517-020-00162-z>, 2020.