

Topical Editor (Randolph Williams)

Randolph Williams: *“There are currently two problems with the current version of the manuscript that prevent its publication. The first concerns the quality of the presentation / writing. There are some sections of the text where far more detail than necessary is provided. Other sections of importance do not include nearly enough. As an example of the latter, important corrections and quantitative methodologies simply refer to a previous publication. You cannot of course fully redescribe methodologies produced by others here, but at least a general description of their function and purpose is required for the reader to grasp your work.”*

Author’s reply: First of all, thanks for the extensive review, comments and suggestions. We have tried to implement your review as good as possible. Examined from temporal distance, we were able to understand many points of criticism. However, it is difficult for us to understand your criticism of the scope and detail of the methodology. We have described the 1D scanline sampling technique, the estimation of the 2D fracture connectivity as well as the different laboratory investigations in an extraordinary scope. For example, in comparison to all other publications that use the scanline method of Priest and Hudson (1981), our description has an extraordinary scope and therefore only our description enables the reader to apply the methodology independently.

Randolph Williams: *“In addition, the discussion often refers to the results section in only a qualitative manner (i.e. this location had higher 2D fracture connectivity than another location). Ideally, these metrics are all included in a figure or table that the reader can be referred to when making these and similar statements. Alternatively, the actual values can be reiterated in the discussion for clarity. In the current version, neither is done, which requires the reader to either remember the values or flip back through the paper. Both are troublesome given that the text is really quite verbose and long.”*

Author’s reply: Based on your comments, we have rewritten and greatly shortened (from 2 pages to 1 page) the section "Field Discontinuity Observations". In addition, we have now created clearer cross-references to the figures and tables we have created. As requested, the section now gives a general overview of the relevant findings. Furthermore, we have adapted the discussion accordingly and included clearer cross-references. Some values are also reintroduced in the discussion, so that the reader can follow the train of thought of the discussion better.

Randolph Williams: *“There are also many grammatical mistakes with respect to english language grammar. Admittedly, most of these mistakes are minor, but there is a sufficient amount of them that makes reading difficult at times. I have noted many of these instances below, but the list is not exhaustive. I understand that Solid Earth is an international journal, and many of the authors do not have english as their native language. This is not inherently a problem, but I would ask that you attempt to address some of these issues in your next version.”*

Author’s reply: We have taken another look at the grammar and language of the complete manuscript and improved both points of criticism in the current version of the manuscript.

Randolph Williams: *“The second issue concerns the length of the manuscript with respect to its “scope” or conclusions. I would like to see this manuscript be greatly shortened and streamlined. As it currently stands, the length is far above what is reasonable for the amount of data, their complexity, and what can be confidently concluded. Too much extraneous detail is included. For example, the geologic setting section is very detailed (although a bit difficult to follow), but very few of these details are referred back to in framing the results and subsequent discussion. This suggests that the level of detail included is more than what is*

required. The fracture fill and roughness data are similarly interesting, but do not seem to play a major role in your overall conclusions. Veining in particular is tough to extrapolate, because assuming that the veins do not predate the fold, then there is a difference in burial between the observed outcrops and the subsurface reservoir of 4 to 6 km. This would result in huge differences in local geochemical conditions, mineral kinetics, etc."

Author's reply: Thank you very much for this remark. The manuscript has been shortened and streamlined. Especially the sections "Geological Setting" and "Study Areas" were shortened considerably. Furthermore we have adapted the "Results" and the "Discussion" so that the reader can follow the discussion more clearly. We have also rewritten text passages to discuss the filling material and roughness.

Randolph Williams: *"The relevant story, as I see it from your data and conclusions, is: 1) the matrix permeability of the unit that is extrapolated into the subsurface is insufficient for energy production; 2) the unit at depth is likely fractured, where fractures parallel to the max horizontal stress may still be open; 3) the length, density, and orientation of fractures at the surface suggests good connectivity at depth, assuming the network is similar there; 4) Thus, the unit has potential for geothermal energy production. In that way, the study is useful and therefore deserving of eventual publication. Assuming that I understand these central conclusions correctly, the manuscript should be greatly streamlined around these ideas to emphasize them. My estimate is that the length of this manuscript could reasonably decrease by as much as 30% without sacrificing detail or clarity. In fact, I think the clarity would be greatly improved as a result."*

Author's reply: The manuscript was shortened and the focus was reduced only to the essential conclusions.

Line-by-line comments:

(A) Abstract

Lines 4 to 5: Please revise this sentence for grammar/clarity. Please pluralize “depth”. What is a permeability “rate”? How does one study “permeability rates with sufficient conductivity”?

Author’s reply: Pluralized “depth” in line 4. Sentence changed accordingly (line 4 to 5): “*Matrix permeability and thermal conductivity was mainly studied in karstified carbonates from the Late Jurassic reef facies.*”.

(B) Introduction

Introduction: This is generally well written from a language clarity perspective. It is also, however, a bit less focused than would be ideal. I think the paper would be very well served by a judicious rewrite of the introduction, with a specific emphasis on getting to the “point” of this study a bit more quickly and with only the relevant information included. At the very least, some additional figures (e.g. maps) would be very helpful in making the first paragraph accessible to the reader.

Author’s reply: We have shortened and restructured the introduction to focus more clearly on the characterization of fractures in potential reservoir rocks for geothermal applications in the Rhine-Ruhr metropolitan area, Germany, which is also the title of the manuscript. The Rhine-Ruhr area is an important study area for renewable energy, especially geothermal energy, due to its economic history and the resulting infrastructure, population density and geological setting.

Line 51: Please change “associate” to “associated”.

Author’s reply: The introduction was restructured and shortened, and in the process the mentioned expression or the whole sentence was removed from the manuscript.

Line 55: What exactly is meant by “mechanical conditions”?

Author’s reply: The introduction was restructured and shortened, and in the process the mentioned expression or the whole sentence was removed from the manuscript.

Line 57: Please change to “...geological ambiguity and to characterize...”.

Author’s reply: The introduction was restructured and shortened, and in the process the mentioned expression or the whole sentence was removed from the manuscript.

Line 63: What exactly is meant by “stability” in this case?

Author’s reply: We were referring to the stability (i.e., strength) of the reservoir. We have adjusted the sentence. The corrected sentence reads (line 47 to 48): “*Fractures and fracture networks have a decisive influence on the fluid flow within the reservoir (e.g., Odling et al., 1999), but also on its stability (e.g., Cappa et al., 2005).*”.

Line 73: Please change to “...at outcrop and sample scales”.

Author’s reply: We have revised the sentence in line 59.

Line 74: Please change “fractured” to “fracture”.

Author’s reply: We have changed the expression in line 60.

Line 77: I do not understand this line as written.

Author's reply: We have revised the sentence and it reads (line 62 to 63): *"All quarries are located within the Devonian Reef Complex. The dominant stratigraphic unit in those quarries is the Massenkalk Fazies from Middle and Upper Devonian (Krebs, 1970; Paeckelmann, 1979; Schudack, 1993)."*

Lines 82 to 84: I am not sure this foreshadowing is necessary, but ultimately it is your choice.

Author's reply: We think that the foreshadowing is necessary at this point.

(C) Geology, Outcrop Investigations, and Laboratory Measurements - Geological Setting

Geological Setting: As stated above, I think this paper would benefit from some streamlining. Part of that would involve considering exactly which aspects of the geologic history are strictly relevant. If kept more or less as is, substantial revising for English-language clarity will be required.

Author's reply: We have decided to keep the geological setting within the scope, but we have reviewed and revised the language and grammar. The manuscript is the first in a series of publications dealing with geothermal energy use in the Rhine-Ruhr area. As the first manuscript in this series, this manuscript is intended to serve as a pilot study and introduction and therefore all relevant geological information on the carbonates in the Rhine-Ruhr region will be collected and listed.

Line 87: Please revise for language clarity.

Author's reply: We have revised the sentence and it reads (line 72 to 74): *"The Rhenohercynian Massif is the northernmost mountain belt of Europe, which results from a shallow marginal sea surrounded by Laurussia (Old Red Continent and Baltica) in the north and the microcontinent Avalonia in the south (Kossmat, 1927)."*

Line 90: Revise for clarity/grammar.

Author's reply: We have revised the sentence and it reads (line 75): *"A shelf sea formed above the thin crust, which is called the Rhenish-Hercynian Basin."*

Lines 92 to 93: Revise for clarity/grammar.

Author's reply: We have revised the sentence and it reads (line 77 to 78): *"During the Hercynian Orogeny, a tectonic NW-ward movement led to expansion as well as periodic marine transgressions and regressions."*

(D) Geology, Outcrop Investigations, and Laboratory Measurements - Study Areas

Study Areas: I feel there are many redundancies between this section and the previous. Ultimately, they could be easily combined and substantially reduced in length.

Author's reply: In the course of the overall shortening, we have streamlined the section "Study Areas" and deleted possible repetitions with the section "Geological Setting".

Line 135: How is a tectonic setting "massively affected" by an anticline? This seems to be putting the cart before the horse.

Author's reply: We have revised the sentence and it reads (line 114 to 115): *"The regional tectonic setting has resulted in the Remscheider Sattel, the Ennepe-Thrust, and the Großholthausener fault, in Hagen-Hohenlimburg (Fig. 1a)."*

Lines 171 to 174: I am having a great deal of trouble understanding these lines as written. Also, I am not sure I would describe beds with a dip direction of ~330 as comparable to those with a dip direction of ~020. That is nearly 50 degrees of difference.

Author's reply: Thank you for pointing out that the wording of this paragraph is not understandable. We agree with you that a deviation of about 50° should not be called "comparable". We have revised this paragraph and it reads (line 136 to 138): *"The mean bedding orientation in the quarries Wuppertal, Hagen Hohemlimburg and Hönnetal is approximately 327°, 345°, and 18° in dip direction with an average dip angle of about 37°, 42°, and 28°. Each stone pit's working levels were approximately oriented perpendicular to each other and strike NNW–SSE and NE–SW (Fig. 3)."*

Lines 176 to 179: I think you could reasonably just call them "fractures", specifying that the term includes veins but does not include open space along bedding planes or schistosity. It is in the title of the paper after all. I appreciate the attempts to be explicit, but this is a journal for geoscientists.

Author's reply: Thank you for the comment. However, we think a clear classification is crucial what kind of fractures we have studied and which not. Therefore, we have not changed the sentence.

Lines 193 to 194: Please revise for clarity.

Author's reply: We have revised the sentence and it reads (line 158 to 159): *"The tape's line levelling is defined by the angle of plunge (approx. $0^\circ \leq \theta_s \leq 15^\circ$)."*

Line 203: Again, this is a journal for geoscientists. You could very easily just say "The dip and dip direction of the intersecting fractures were recorded".

Author's reply: We have revised the sentence and it reads (line 168): *"Orientation: The dip and dip direction of the intersecting fractures were recorded."*

(E) Results - Field Discontinuity Observations

Field Discontinuity Observations: In light of the provided tables, this exhaustive description of the data really does not seem necessary. A general overview of the relevant findings would suffice.

Author's reply: Based on your comments, we have rewritten and greatly shortened (from 2 pages to 1 page) the section "Field Discontinuity Observations". In addition, we have now created clearer cross-references to the figures and tables. As requested, the section now gives a general overview of the relevant findings.

Lines 305 to 310: Suggest using azimuth ranges for fracture sets, as they are far easier to understand than long strings of NNW-SSE, NE-SW, etc.

Author's reply: We have revised the sentences and they read (line 275 to 279): *"In Wuppertal the sets were grouped into the azimuth directions 172° (181 discontinuities), 55° (142 discontinuities), and 105° (138 discontinuities) (Fig. 4c,d; Table 6). In contrast, the discontinuity sets in Hagen Hohemlimburg and Hönnetal were oriented towards 135° (134 discontinuities), 12° (95 discontinuities), and 75° (132 discontinuities), and 176° (140 discontinuities), 65° (24 discontinuities), and 87° (82 discontinuities), respectively (Figs. 5c,d; 6c,d; Table 6)."*

Lines 313: "Paleofilled"?

Author's reply: We have changed the expression to "calcite-filled".

Line 319: What is the differentiation between a filled fracture and a closed fracture?

Author's reply: Thank you for pointing out that we have not yet clearly clarified this distinction. We have added the following sentences to Table 1: "Overview of the documented discontinuity properties and their classification as defined for scanline surveys (modified after Markovaara-Koivisto and Laine, 2012). In our observations we distinguish between open, closed, and filled fractures. Open fractures are those that are neither filled with calcite nor with debris. Closed fractures are in fact joints. Filled fractures are not categorized as closed ones, since both fracture surfaces are not in direct contact with each other. Filled fractures can either be filled with calcite or with debris."

The original sentence was deleted due to shortening.

Line 320: Does the use of the term significant imply that a statistical analysis was applied?

Author's reply: We have now supplemented the manuscript with a statistical analysis of the strike directions with respect to their filling material and no significant difference between their strike directions can be found (Fig. 7). Accordingly, we have applied this insight to the entire manuscript and adapted the corresponding text passages.

The following statement can now be found in the results section (line 280 to 282): "*By further differentiating the strike directions of the classified discontinuity sets further according to their filling material no strike rotation between calcite and debris-filled fractures were identified (Fig. 7).*"

In the discussion it reads now for example: "*We could not detect any rotation between the strike direction of calcite and debris-filled fractures (Fig. 7). Hence, the maximum horizontal stress may have changed only slightly, if at all, in the time between the formation of the calcite and the debris-filled fractures.*"

(F) Results - Laboratory Characterizations

Lines 397 to 409: No tables or figures to cite with this information?

Author's reply: We have adjusted the sentences and added cross-references to Table 4 (line 310).

Lines 410 to 411: Sorry, but I am unable to follow this sentence?

Author's reply: We have revised the sentence and it reads (line 321 to 322): "*The thermal conductivity measurements showed similar results for limestones as for dolomitic carbonates. However, a slight scattering can be observed.*"

Lines 423 to 448: So you also did all these analyses on a single vein sample? Can you provide some text justification for why? What was the goal?

Author's reply: Due to the suggestion to shorten the manuscript and thus focus on the main part of the study, we have decided to eliminate the paragraph. We agree with the comment that these findings do not add significant value in the present study. Overall, we have deleted all information, descriptions, etc. that refer to this particular sample from the manuscript.

(G) Discussion - Estimating the Geological Subsurface Model of the Carbonate Reservoir

Lines 470 to 485: The reader cannot reasonably assess your interpretations regarding the relative geometry of the fractures and regional structures unless you reference some stereonetts that also include the orientation of the regional structures. Reviewer #1 suggested that the fracture orientations be restored to

their “original” orientations through an unfolding procedure. This is a good suggestion, and it is not clear to me why that was not done? I do not agree that this “exceeds” the scope of the study as stated in the response letter. It would seem to be well within the scope of the study.

Author’s reply: Many thanks for the explicit advice to deal with the rotation of the measured fractures in detail once again. In the scope of the revisions we have applied a simplified method to all our measurements. Now you can see the recent measured fracture orientations from the stereograms and the rotated fracture orientations from the corresponding rose diagrams (Fig. 4a, 5a, 6a and Fig. 4b, 5b, 6b). We have adapted and changed the text accordingly (line 364 to 368): *“All studied outcrops are located in the large-scaled Remscheid-Altena anticline formation. However, there is a difference between the three outcrop results, which could be influenced by the regional the Remscheid-Altena anticline, different stress conditions and/or a different time of origin (Table 3). The fracture orientations were rotated according to the corresponding bedding layers (Figs. 4a, 5a, 6a) to a horizontal position (Figs. 4b, 5b, 6b). The fracture unfolding procedure indicates a similar tectonic origin for fractures sets from Wuppertal and Hagen Hohenlimburg.”*.

(H) Discussion - Orientation of the Fracture Network

Lines 541 to 543: Please be more specific as to why this interpretation is valid. Only a citation is given. Evidence should also be provided.

Author’s reply: We agree, that the sentence as written needed an evidence to prove the statement. However, we cannot prove this interpretation with sufficient accuracy. Therefore, we have changed the sentences as follows (line 437 to 441): *“Nickelsen and Hough (1967) and Roberts (1974) investigated discontinuity orientations in sedimentary layers with respect to the maximum horizontal stress and their corresponding filling material. The orientations of the respective structures in their area are almost identical to the values we measured. They concluded that the discontinuity directions can be related to residual stresses and stress release during past unloading regimes, which might be transferable to our studied areas (Fig. 7).”*.

Lines 546 to 547: So, you feel that this fracture set is most promising for exploiting geothermal energy, but you also think it is “highly probably” filled with calcite cements? I’m confused. Are the calcite cements only occluding a small portion of the fracture porosity? Else, sealed fractures generally make for poor conduits, no?

Author’s reply: You are absolutely right in claiming that filled fractures are bad conduits. We could not find any difference in orientation or occurrence between calcite and debris filled fractures. Therefore, the filling material cannot be the only criterion we have to consider. A second criterion must therefore necessarily be the direction in which we prefer to find open rather than closed cracks, relative to the maximum horizontal stress in the region. Fractures oriented in the direction of the maximum horizontal stress are very promising for enhanced fluid flow. Even if we cannot predict it with certainty, there is a chance that these fractures are open due to the orientation towards the maximum horizontal stress. In addition, the hydraulic stimulation of these fractures and/or fracture networks could be very promising and allow the operation of geothermal energy systems.

This information is now included in the following sentences of the discussion (line 455 to 464): *“More than half of all our observations showed paleo filling materials such as calcite and in addition, approximately 17 % showed calcite enriched slickensides on the fracture surface (Fig. 7). Thus, apart from the orientation, no differences in occurrence between calcite and debris-filled fractures can be detected, and we must further*

consider the orientation of the fractures. Even if we cannot predict it with certainty, pre-existing discontinuities oriented parallel to the principal horizontal stress could be observed openly, while discontinuities oriented perpendicular to this stress tend to be closed (Lorenz et al., 1991). Accordingly, the highest fracture permeability can be expected in NNW–SSE direction. But there might be open fractures that are not necessarily aligned in the principal stress direction and are still open. This is particularly true for fractures that are filled, for example, with cement (Laubach et al., 2004). In general terms, a large number of fractures might be paleo fluid-flow paths striking in NNW–SSE direction, which could be exploited by advanced drilling methods (e.g., hydraulic fracturing; Dahi Taleghani and Olson, 2013) for future geothermal applications.”.

(I) Discussion - Filling and Surface Roughness of the Fracture Network

Section 4.2.2: This is really quite difficult to follow.

Author’s reply: We have now renamed the section to "Orientation, Roughness, and Filling of the Fracture Network" and have completely revised and shortened it accordingly. As you mentioned before, we have now extended the discussion of the filling material.

Lines 562 to 563: What is the typical aperture of these fractures? Seems like the probability of detecting them seismically is extremely low? There is almost certainly information already out there that would allow you to evaluate this claim.

Author’s reply: Thank you for the comment to mention already a possible solution for the detection of the mentioned fractures, which are of interest. We have adapted this idea in the following sentences (line 467 to 470): *“Considering the typical seismic resolution concerning the depth of investigation and fracture aperture, individual discontinuities will probably not be resolved (Martin et al., 2006). However, the fracture density may be sufficient to demonstrate macroscopic anisotropy using seismic methods (Löer et al., 2018).”.*

Line 565: What does the percentage of calcite filled fractures have to do with any specific tectonic origin?

Author’s reply: Your observation is correct. This was a textual relic. The sentence was deleted.

Line 566: A “slight” rotation. Did you evaluate statistically if there is a significant difference between the two orientations. Lots of methods are available to do this. See paper by Roberts et al. JSG, 2019 on statistical analysis with structural data. Figure 7 seems to show a slight rotation only at Honnetal?? The other two cites seem essentially the same.

Author’s reply: We have now supplemented the manuscript with a statistical analysis of the strike directions with respect to their filling material and no significant difference between their strike directions can be found (Fig. 7). Accordingly, we have applied this insight to the entire manuscript and adapted the corresponding text passages.

The following statement can now be found in the results section (line 280 to 282): *“By further differentiating the strike directions of the classified discontinuity sets further according to their filling material no strike rotation between calcite and debris-filled fractures were identified (Fig. 7).”.*

In the discussion it reads now for example (line 450 to 452): *“We could not detect any rotation between the strike direction of calcite and debris-filled fractures (Fig. 7). Hence, the maximum horizontal stress may have changed only slightly, if at all, in the time between the formation of the calcite and the debris-filled fractures.”.*

(J) Discussion - Connectivity of the Fracture Network

Line 580: Field scale?

Author's reply: We have changed the sentence structure to avoid misunderstandings. The sentence now reads as follows in line 469: *"Predominantly discontinuities with short trace lengths occur on the field scale Figs. 4d, 5d, 6d)."*

Line 587: Seems highly probably that they are underestimated rather than "might be".

Author's reply: We have revised the sentence and it reads (line 473): *"In other words: 40% of all measured trace lengths are highly probably underestimated by the method."*

Line 585: That analysis needs to be summarized. This manuscript has too much of a tendency to just refer the reader to other sources on important points of methodology or conclusion. That is reasonable to do only in some cases. This is not one of them, as the reader cannot be expected to read so much external material in order to understand what was done here.

Author's reply: This methodology was already summarized in lines 194 to 198. The sentence was rewritten and the cross-reference to Equation 2 was inserted (line 478): *"This source of error was attempted to be minimized by the censored semi-trace length analysis (Equation 2)."*

Line 593: I never saw a probability of interconnection listed, so it is not clear what "comparable" to that would be.

Author's reply: This sentence was deleted due to shortening of the section.

Line 594: Again, this statement seems very qualitative. You have quantitative estimates. Please refer back to them here explicitly (i.e. the actual values). Better still, refer to a figure or table that includes them.

Author's reply: We have adjusted the sentence according to the comment (line 482 to 483): *"The results of the 2D fracture connectivity analysis clearly show that the reservoir in Wuppertal has the highest average 2D fracture connectivity, that is, an average number of discontinuity intersections per discontinuity of 21.42 (Table 6)."*

Line 597: Again, please reference the actual estimates. Moreover, why do these metrics not appear in any figures or tables?

Author's reply: We have adapted the sentence according to the commentary and added an additional table to the manuscript (line 487 to 490): *"Although the recorded fractures in Hagen Hohenlimburg exhibit the greatest variety of strike directions (Fig. 5), the estimated 2D fracture connectivity is the lowest at this location due to the short discontinuity lengths and the associated low fracture densities (Table 6)."*

Line 605: Not overly clear to me what this paragraph has to do with fracture connectivity?

Author's reply: In this paragraph, we discuss pore connectivity, which can also influence permeability if the pore connectivity is high enough. To emphasize the correlation even more, the following sentence in line 492 has been adapted: *"Consequently, a higher density of potentially hydraulically stimulated pores and cracks (or fracture network) can be expected in the dolomitic carbonate layers on the field scale."*

Line 635: This is one vein. How do we use it to infer anything about a target horizon?

Author's reply: This sentence was deleted due to shortening of the section.

(K) Conclusion

Line 640: So to summarize results: 1) matrix permeability would be insufficient for geothermal energy production; 2) Fractures may be present at depth based on outcrop, and those parallel to the max horizontal stress are most likely to be open and therefore productive; 3) Based on fracture length and orientation observed at the surface, there may be a well connected network at depth. These are useful conclusions, but they could be stated much more succinctly.

Author's reply: We have now restructured the conclusions. Our conclusions are now more accessible.

Characterization of fractures in potential reservoir rocks for geothermal applications in the Rhine-Ruhr metropolitan area (Germany)

Martin Balcewicz^{1,2}, Benedikt Ahrens³, Kevin Lippert^{3,2}, and Erik H. Saenger^{1,3,2}

¹Department of Civil and Environmental Engineering, Bochum University of Applied Sciences, Lennershofstraße 140, 44801 Bochum, Germany

²Institute of Geology, Mineralogy, and Geophysics, Ruhr-University Bochum, Universitätsstrasse 150, 44801 Bochum, Germany

³Fraunhofer IEG - Institution for Energy Infrastructures and Geothermal Energy, Lennershofstraße 140, 44801 Bochum, Germany

Correspondence: Martin Balcewicz (martin.balcewicz@hs-bochum.de)

Abstract. The importance of research into clean and renewable energy solutions has increased over the last decade. Geothermal energy provision is proven to meet both conditions. Therefore, conceptual models for deep geothermal applications were developed for different field sites regarding different local conditions. In Bavaria, Germany, geothermal applications were successfully carried out in carbonate horizons at depths of 4000 to 6000 m. [Matrix permeability and thermal conductivity](#) was mainly studied in karstified carbonates from the Late Jurassic reef facies. Similar to Bavaria, carbonates are located in the east of the Rhenohercynian Massif, in North Rhine-Westphalia (NRW), which quantification of the geothermal potential is still lacking. Compared to Bavaria, a supraregional carbonate mountain belt is exposed at the Remscheid-Altena anticline (NRW) from late Devonian and early Carboniferous times. The aim of our study was to examine the potential geothermal reservoir by field and laboratory investigations. Therefore, three representative outcrops in Wuppertal, Hagen Hohenlimburg, and Hönnetal were studied. During field surveys, 1068 discontinuities at various spatial scales were observed by scanline surveys. These discontinuities were characterized by trace length, true spacing, roughness, aperture, and filling materials. Joint orientation analysis indicated three dominant strike orientations in NNW–SSE, NW–SE, and NE–SW directions within the target horizon of interest. This compacted limestone layer (Massenkalk) is approximately 150 m thick and located at 4000 to 6000 m depth, dipping northwards at a dip angle of about 30 to 40°. An extrapolation of the measured layer orientation and dip suggests that the carbonate reservoir [could hypothetically](#) extend below Essen, Bochum, and Dortmund. Our combined analysis of the field and laboratory results has shown that it could be a naturally fractured carbonate reservoir. We evaluated the potential fracture network in the reservoir and its orientation with respect to the prevailing maximum horizontal stress before concluding with implications for fluid flow: We proposed to focus on prominent discontinuities striking in NNW–SSE for upcoming geothermal applications, as these (1) are the most common, (2) strike in the direction of the main horizontal stress, (3) the fracture permeability significantly exceeds that of the reservoir rock matrix, and (4) because some of them are filled. Hence, the filled fractures bear the potential to be reopened by, for example, hydrochemical dissolution to create even better fluid efficiencies. Our results indicate that even higher permeability can be expected for karstified formations related to the

reef facies and hydrothermal processes. Our compiled data set consisting of laboratory and field measurements may provide a good basis for 3D subsurface modeling and numerical prediction of fluid flow in the naturally fractured carbonate reservoir.

25 Further studies have to be elaborated to verify, if the fractured reservoir could possibly be reactivated by, for instance, hydraulic stimulation and thus enable geothermal applications.

1 Introduction

The Rhine-Ruhr metropolitan region in western Germany is one of the largest metropolitan areas in Europe. It has the largest European district heating network (AGFW, 2009) and is one of the largest energy systems in the world, which is predominantly

30 fed by fossil fuels (Klaus et al., 2010). In recent decades, the Ruhr metropolitan area has been subject to structural changes associated with the ending of traditional coal mining and steel industry as well as accelerated urbanization. Considering effective climate changes, these processes pose local to global challenges for a post-fossil energy future. The polycentric structure of the Rhine-Ruhr area is particularly promising for the requirements imposed by the energy transition (Wegener et al., 2019). To account for the increasing demand for energy supply (e.g., Scheer et al., 2013; Araújo, 2014), the successful implementation

35 of sustainable non-fossil energy concepts, such as geothermal energy projects, is required (Fridleifsson et al., 2008; Goldstein et al., 2011).

In recent years, many economically successful geothermal energy projects in Bavaria, southern Germany, have been realized and could serve as a valuable model for the Rhine-Ruhr area. The Bavarian part of the South German Molasse Basin has a high hydrothermal energy potential (Schellschmidt et al., 2010; Böhm et al., 2010; Stober, 2014; Homuth, 2014), which can

40 be extracted from pre-existing fracture and karst systems in deep carbonate rocks (e.g., limestone deposits Fritzer et al., 2010). Similar to deep Bavarian deposits, carbonate rocks were accumulated in western Germany. Geothermal systems aiming for comparable geological carbonate horizons in the Rhine-Ruhr area, located at depths relevant for deep geothermal applications (DEKORP Research Group, 1990), are promising solutions to initiate the energy transition (Knutzen, 2017). A feasibility study including extensive subsurface reservoir characterization and local geological site assessment is essential to describe the

45 hydrothermal potential of presumably fractured and faulted carbonates in the Rhine-Ruhr area.

The estimation and description of individual fractures and entire fracture networks in deep reservoirs is of elementary importance when it comes to reservoir characterisation. Fractures and fracture networks have a decisive influence on the fluid flow within the reservoir (e.g., Odling et al., 1999), but also on its stability (e.g., Cappa et al., 2005). They are typical observations at analogues outcrops and can be measured there (see review by Bonnet et al., 2001). While the origin of these typically tectonic driven fractures can be discussed extensively, the influence on reservoir permeability is obvious. Compared to the matrix permeability of the host rock, the permeability of fractures is generally several orders of magnitude higher (e.g., Nelson and Handin, 1977; Kranz et al., 1979; Evans et al., 1997; Ahrens et al., 2018). Detailed fracture analysis is essential to model reservoir quality, optimal well locations, and well performance (Nelson, 2001). Field surveys are both the first and one of the most crucial steps in the exploitation of the reservoir (van Golf-Racht, 1982; Agosta et al., 2010), that is, the investigation of

55 the discrete fracture network (DFN). Furthermore, Since direct information on in-situ properties are limited and inaccessible

(e.g., seismic tomography or well and borehole data), outcrop characterizations and laboratory measurements can provide the basis for reservoir characterization and the estimation of the potential reservoir behaviour under in-situ conditions.

In this integrated study, we examine the geothermal potential of deep carbonates in the Rhine-Ruhr area, by combining field and laboratory investigations of pre-existing fractures and fracture networks at outcrop and sample scales. The combined analysis of field and laboratory measurements allows us to describe the potential carbonate reservoir by characterizing its natural fracture systems. Three outcrop analogues on the eastern side of the northern Rhenohercynian Massif have been chosen for field survey and sample collection. All quarries are located within the Devonian Reef Complex. The dominant stratigraphic unit in those quarries is the Massenkalk Fazies from Middle and Upper Devonian (Krebs, 1970; Paeckelmann, 1979; Schudack, 1993). Dominant fracture systems and different facies have been documented and sampled. Most of these measurements have been conducted by one-dimensional scanline surveys (Priest and Hudson, 1976, 1981). Representative fresh rock samples have been taken directly from the outcrop wall and petrophysically characterized by different laboratory methods.

In the following, we first introduce the geology of the Devonian Reef Complex. We proceed by describing the outcrops and the employed field and laboratory methods. Following the presentation of the measurements results, we conclude by discussing the geothermal potential of the geological subsurface model, that is, the deep carbonate layers and their fracture systems.

2 Geology, Outcrop Investigations, and Laboratory Measurements

2.1 Geological Setting: The Devonian Reef Complex

The Rhenohercynian Massif is the northernmost mountain belt of Europe, which results from a shallow marginal sea surrounded by Laurussia (Old Red Continent and Baltica) in the north and the microcontinent Avalonia in the south (Kossmat, 1927). During the early Devonian a passive continental margin developed south of Laurussia, which was affected by crustal thinning. A shelf sea formed above the thin crust, which is called the Rhenish-Hercynian Basin. The shallow sea, which ranged from Bretagne across Belgium to Germany, was filled with clastic shelf deposits and carbonates from Laurussia. During the Hercynian Orogeny, a tectonic NW-ward movement led to expansion as well as periodic marine transgressions and regressions. In the late Middle Devonian Avalonia moved north and sedimentation in the offshore belt decreased. The continued NW movement favored the growth of submarine volcanic mounds and thus also that of carbonates and coral/stromatoporoid reefs on the shelf (Jux, 1960; Grabert, 1998; Dallmeyer et al., 2013; Franke et al., 2017). Along the coast of Laurussia an elongated reef complex developed, the so-called Devonian reef complex (Krebs, 1970).

The Devonian Reef Complex extends over the area from Neandertal (Düsseldorf) across Dornap, Wuppertal, Schwelm, Hagen Hohenlimburg, Letmathe, Sundwig, Iserlohn, Hemer to Balve (Fig. 1a). Furthermore, these horizons can also be observed in drillings in northern Germany (e.g. Hesemann, 1965, Münsterland 1). Continued crustal expansion and subsidence are characterized by a transition from siliceous, deltaic shallow marine environments (Rhenish facies) to open marine shale and purely limestone-dominated facies (Hercynian facies) (Krebs, 1970; Grabert, 1998; Pas et al., 2013; Meschede, 2018). Shelf clastics and carbonates are overlaid by hemipelagic deposits (Dallmeyer et al., 2013). During the Late Devonian and Early Carboniferous, the reef complex receded to the north and sedimentation changed during the closure of the Rhenohercynian

basin. Primarily caused by tipping blocks and faults, firstly greywacke turbidites and secondly a quartz-rich sandstone was deposited in the foreland. Sedimentation also continued in the Late Carboniferous and led to embedded sequences of the Ruhr area at the northwestern edge of the Rhenohercynian foreland. From the Early Carboniferous onwards, the deposited sediments were compacted and folded by the Hercynian Orogeny. In the meantime, the thick sediment accumulations (3 to 12 km) were thrust by reactivated listric normal faults during the NW movement (Oncken, 1997; Franke et al., 1990; Engel et al., 1983; Franke and Engel, 1982; Holder and Leversidge, 1986; Meschede, 2018). Between the Early Triassic and the Late Cretaceous at least two further extension sequences developed, which caused a NE-SW-directed shortening (Brix et al., 1988; Drozdowski and Wrede, 1994). Since the Eocene, the complex tectonic environment is affected by another extension regime (Kley, 2013).

2.2 Study Areas

Three stone pits have been chosen for field studies within the Devonian Reef Complex: (1) stone pit Osterholz located in Wuppertal, (2) quarry Oege in Hagen Hohenlimburg, and (3) quarry Asbeck in Hönnetal (Fig. 1a). The outcrops in Osterholz, Oege, and Asbeck are active open pit mines and are driven by independent companies called Kalkwerke H. Oetelshofen GmbH & Co. KG, Hohenlimburger Kalkwerke GmbH, and Rheinkalk GmbH, respectively. The entrances of the three quarries are located at (1) E ³⁶3372, N ⁵⁶79249, (2) E ⁴⁰1215, N ⁵⁶89459, and (3) E ⁴⁰0334, N ⁵⁶93287 (Fig. 3). In the following the outcrops will be referred according to their geographical location: Wuppertal (WOH), Hagen Hohenlimburg (HKW), and Hönnetal (HLO).

The quarry Osterholz in Wuppertal is located in the Osterholz graben, which is limited by the Herzkammer syncline to the north and the Wupper river to the south (Fig. 1a). The regional geology is dominated by WSW–ENE striking folds, which are associated with the Hercynian orogeny (Paeckelmann, 1979). This local tectonic regime was mainly affected by the Hercynian orogeny and became further compressed by recent folding processes in the south. The stratigraphic unit of the quarry Osterholz in Wuppertal is Upper Givetian (approx. 382 Ma), primarily the Schwelm facies (according to Krebs, 1970). The studied limestone layers with a mean thickness of 1 to 5 m showed grayish, compacted layers of well-bedded carbonates with corals, stromatoporoidea, and bioclastic materials. This approximately 150 m thick horizon sits on top of dolomitic carbonates and is related to the brachiopoda- and coral-rich series of stromatopora series. The limestone bed boundaries show mechanical and fracture stratigraphy.

The regional tectonic setting has resulted in the Remscheider anticline, the Ennepe-Thrust, and the Großholthausener fault, in Hagen-Hohenlimburg (Fig. 1a). In the Remscheider anticline's northern limb, where the studied quarry was set, the Hasper anticline and Voerder syncline are located. Both folds are monoclines, and their steep limbs rapidly end when intersecting the regional strike slip fault Großholthausener fault. In the east of the Großholthausener fault, the quarry Oege in Hagen Hohenlimburg is based. Krebs (1970), Flügel and Hötzl (1976) and Koch-Früchtel and Früchtel (1993) characterized the local compacted limestone in the quarry Oege as Schwelm facies. The quarry is enriched in dolomite due to hydrothermal veins (von Kamp and Ribbert, 2005). These dolomitic carbonates manifest in a high degree of fractured blocks and karst formations, which were filled by tertiary- and cretaceous-sediments, respectively. The carbonates, which were untouched by the hydrothermal veins,

contain brachiopoda, bivalves, crinoids, corals, gastropoda, stromatoporoidae, and micrite. These carbonates are identified as Middle Devonian (Givetian according to Basse et al., 2016).

125 The quarry Asbeck in Hönnetal is located to the north of the Remscheid-Altene anticline (Fig. 1a). The exposed compacted limestone deposits are dipping gently to the north and are surrounded by older Devonian sediments in the south and early Devonian, late Carboniferous sediments to the north. The regional setting is dominated by NNW–SSE striking strike-slip faults, which are associated with the folding mechanics during Hercynian orogeny like the Großholthausener fault in Hagen-Hohenlimburg (Paeckelmann, 1938). Those strike-slip faults can be tracked along with the major Remscheid-Altene anticline structure. At the most eastern part of the Remscheid-Altene anticline, the fold's tip is plunging to the NNE direction. The local stratigraphy of the quarry Asbeck in Hönnetal consists of an initial bank stadium (Schwelm Facies) that developed into a true bioherm complex, that is, Dorp Facies (Becker et al., 2016). Schudack (1993) has investigated the different facies and cyclic depositions of the reef and back-reef lagoon facies and subdivided these facies into six subfacies, which were investigated in more detail by Kloke (2007). The grayish, highly compacted limestones (approx. 600 m thickness) containing corals, stromatoporoidea, and Brachiopoda are associated with late Middle Devonian (Givetian) or early Late Devonian (Frasnian). Except for 130 some minor parts that were mentioned by Kloke (2007), no dolomitic rocks were documented.

The mean bedding orientation in the quarries Wuppertal, Hagen Hohemlimburg and Hönnetal is approximately 327°, 345°, and 18° in dip direction with an average dip angle of about 37°, 42°, and 28°. Each stone pit's working levels were approximately oriented perpendicular to each other and strike NNW–SSE and NE–SW (Fig. 3).

2.3 Field Method and Theoretical Estimation: 1D Outcrop Scanline Surveys and 2D Fracture Connectivity

140 The term discontinuity and its origin can be looked up in many textbooks on structural and engineering geology (e.g., Priest, 1995). In the following, we define a discontinuity as a weak zone within a rock mass that can be referred to as a fracture, joint, vein, or fault. Unlike the International Society for Rock Mechanics (ISRM, 1978), we neglect weak bedding planes or schistosity planes in the field surveys. Nevertheless, we distinguish between natural discontinuities, which are associated with geological origins, and artificial discontinuities, which result from anthropogenic processes (e.g., drilling, blasting, or 145 excavation).

The discontinuities were recorded by a scanline sampling technique, according to Priest and Hudson (1981). The advantages and disadvantages of this method have already been discussed in detail in several studies over the last decades (e.g., Attewell and Farmer, 1976; Priest and Hudson, 1981). Based on our field observations, we simply assume that spatially homogeneous fracture networks dominate in the exposures, depending on the spatial observation scale. In regions with spatially heterogeneous fracture networks, however, more complex methods than the scanline sampling technique are required for fracture characterization (e.g., Watkins et al., 2015). According to the study of Priest and Hudson (1981), this paper focuses only on the most important parts of this technique. The setting of a scanline survey is a tape line, which is fixed firmly to the exposed rock wall and shows a start and an endpoint. The length of a scanline can range from a few decimetres to several meters. Estimates of all possible error sources have shown that the number of measured and recorded discontinuities is more significant than the 155 length of the scanline (Priest and Hudson, 1981). Therefore, we selected representative, safe rock walls for each quarry where

at least 30 measurable discontinuities (number of discontinuity observations $n \geq 30$) could be recorded. After the tape line was fixed, the trend and plunge angle of the tape line were measured. The trend angle reflects the orientation of the tape line ($\alpha_S = 0^\circ \equiv \text{North}$; $\alpha_S = 180^\circ \equiv \text{South}$), which corresponds to the strike of the rock wall. **The tape's line levelling is defined by the angle of plunge (approx. $0^\circ \leq \beta_S \leq 15^\circ$).** After the tape line was installed, each discontinuity that intersected the tape line was recorded and categorized according to the following six properties (cf. Table 1):

1. **Intersecting distance:** The intersecting distance corresponds to the distance between each intersecting discontinuity and the fixed starting point of the tape line.
2. **Discontinuity length:** The installed tape line and the intersecting discontinuity meet at an intersecting point. The trace length above and below the tape towards the joint tips indicates the length of the discontinuity. If both tips exceed the rock walls height, the discontinuity is recorded as "through-going". Accordingly, discontinuities of which one or both ends are visible are categorized as "one end visible" or "both ends visible". On rare occasions, neither of both ends can be recorded; then, the discontinuity is documented as "neither ends visible".
3. **Orientation:** **The dip and dip direction of the intersecting fractures were recorded.**
4. **Roughness:** Roughness is the inherent alignment and waviness of the surface at the mean level of a discontinuity. A large-area waviness may also alter the dip locally. All roughness measurements were recorded manually. Therefore, we distinguish between smooth, slightly rough, and rough, both on mesoscopic and field scale. On the mesoscopic scale, the fracture surfaces were analyzed for mineral steps, stylolites, or plumose structures. On the field scale, the fracture roughness was determined by wavelength measurements with a tape line.
5. **Aperture:** Aperture is the perpendicular distance between adjacent rock walls of a discontinuity where the space between them is filled with a material, that is, filling.
6. **Filling:** Filling is the material that separates the adjacent rock wall of a discontinuity and is usually weaker than the parent rock. In our study, typical filling materials are calcite, clay, or debris. These include thin mineral coatings and healed discontinuities such as quartz and calcite veins.

In spite of the above-mentioned records, it must be emphasized again how important the calculation of the intersecting angle is. Due to an irregular outcrop wall, the distance between the starting point and the recorded discontinuity (i.e. apparent spacing) is measured incorrectly. This apparent distance distorts the true orientation of the discontinuity. The true angle δ between the scanline orientation (trend/plunge) and the normal to the recorded discontinuity was calculated according to

$$\delta = \arccos(\cos(\alpha_n - \alpha_s) \cos(\beta_n) \cos(\beta_s) + \sin(\beta_n) \sin(\beta_s)), \quad (1)$$

where α_s , β_s , α_n , and β_n denote the trend direction of the tape line (scanline), the plunge direction of the tape line with regard to trend orientation, and the dip direction and dip of the normal to the fracture, respectively. Further, the true angle δ and the

apparent spacing χ_s between two discontinuities were used to calculate the true spacing assuming a homogeneous fracture pattern $\chi_r = \cos(\delta)\chi_s$. By evaluating the ratio of true discontinuity spacing χ_r and the number of discontinuity observations the mean discontinuity spacing $\bar{\chi} = \lambda^{-1} = (\sum \chi_r)n^{-1}$ was determined, where λ denotes the discontinuity frequency. The evaluation of the mean discontinuity track length with respect to the required accuracy has already been discussed in detail by Priest and Hudson (1981). The authors have made various suggestions when the end of a discontinuity trace on an investigated rock wall may not be visible, for example, due to geological events or anthropogenic processes. In our study, the proposed solution for censored semi-trace length sampling was adopted to evaluate the mean discontinuity track length μ_i . If the distribution of trace length over the recorded rock wall follows a power-law distribution, then the frequency $f(l)$ is given by $f(l) = \lambda e^{-\lambda \bar{\chi}}$. Following the approach of Priest and Hudson (1981), for censored semi-trace length analysis the mean discontinuity trace length was determined according to

$$\mu_i^{-1} = \mu^{-1} - (ce^{-\mu c})(1 - e^{-\mu c})^{-1}, \quad (2)$$

where μ and c denote mean population frequency and concealed trace length of the recorded discontinuity, respectively. Typically, the concealed trace length is one order of magnitude smaller than the recorded trace length. Note that discontinuities exceeding the height of the outcrop wall could be detected at the nearest level above and/or below the quarry. In addition, the simplified 2D fracture connectivity of fractures aligned perpendicular to the examined outcrop face, that is, the average number of discontinuity intersections per discontinuity P , was estimated for each opencast mine according to Ozkaya (2011)

$$P = \sum_k^n d_k^{-1} \sum_k^n d_k \sum_{j \neq k}^n d_j L_j \sin(\Delta\theta_{jk}), \quad (3)$$

where $\Delta\theta_{jk}$, d_j , and L_j denote the angle between the average striking directions of two discontinuity sets j and k , the number of discontinuities per total scanline length (i.e., fracture density), and the mean discontinuity length of each discontinuity set, respectively. In each outcrop we encountered three sets of fractures ($n = 3$) in the respective investigated carbonate layers. Therefore, the average fracture connectivity P of each exposed carbonate layer was estimated on the basis of three average fracture densities and mean discontinuity lengths.

The recorded discontinuities were evaluated with MATLAB (2018) after Hudson (2005) and Markovaara-Koivisto and Laine (2012). Markovaara-Koivisto and Laine (2012) developed an open-source MATLAB code for the visualization of scanline survey results that was adapted to the purpose of this study. All measurements were recorded according to the metric system of measurement.

2.4 Laboratory Measurements: Petrophysical Characterization of Samples

During the fieldwork, loose rock blocks were taken in each quarry for further petrophysical characterization. Compacted limestones, dolomites, and red, dolomitic rocks were named MKB (black Massenkalk), MKY (yellow Massenkalk), and MKR (red Massenkalk), respectively. After sampling, the rocks were named according to the sampled quarry, sampled working level, rock type, and sample number. Representative, cylindrical cores with a diameter of 40 mm were extracted from each of these

blocks by diamond core drilling perpendicular to the bedding direction. All samples were saw-cut plane-parallel and their end faces were ground square to the maximal possible length l . All steps of the preparation were conducted with water as coolant and for rinsing removed material. Following preparation, samples were oven-dried at 60 °C for about 48 h. Basic petrophysical properties were determined on identically prepared samples at ambient conditions, except permeability, which was derived under elevated pressures.

Bulk density ρ_{geo} was calculated from the geometrical volume of the cylindrical samples and their dry masses. Grain density ρ_{grain} was gained from pycnometer measurements on rock powder, produced by crushing and grinding of leftover rock fragments, in compliance with the German DIN 18124 standard. By evaluating the ratio between bulk and grain density, the total porosity was determined according to $\phi_{\text{tot}} = 1 - (\rho_{\text{geo}}/\rho_{\text{grain}})$. The connected porosity, that is, the externally accessible and connected pore volume, was determined using the difference of the masses of dry and saturated samples with distilled water (see Duda and Renner, 2013).

Ultrasonic P- and S-wave velocities, v_{P} and v_{S} , were determined on dry and saturated samples from first-arrival measurements using an ultrasound benchtop unit composed of a waveform generator, two identical broadband ultrasound sensors (1 MHz center frequency and 0.5 in diameter), and a digital storage oscilloscope (200 MHz sampling frequency). Measurements were performed parallel to the cylinder axis, that is, the drilling direction. Velocities were calculated by dividing the sample length by the determined arrival times less than the assembly parts' travel time. Drained dynamic Young's modulus \tilde{E}_{d} and Poisson's ratio $\tilde{\nu}_{\text{d}}$ were calculated by dry P- and S-wave velocities, $v_{\text{P,dry}}$ and $v_{\text{S,dry}}$, and bulk density assuming isotropy (see Mavko et al., 2020). Moreover, saturated P- and S-wave velocity, $v_{\text{P,sat}}$ and $v_{\text{S,sat}}$, and the density of the fluid-saturated sample was used to calculate undrained Poisson's ratio $\tilde{\nu}_{\text{ud}}$ and Young's modulus \tilde{E}_{ud} , assuming isotropy and employing Gassmann's hypothesis (Gassmann, 1951) that S-wave velocity remains unaffected by the presence of a fluid ($v_{\text{S,dry}} = v_{\text{S,sat}}$).

Thermal conductivity κ_{dry} of the dry sample cores was determined by a thermal conductivity scanner using an optical-scanning-method at ambient conditions (Popov, 1997). The scanner consists of an emitter and a measuring unit that is moved along the sample at a fixed distance. The emitted light and heat radiation are focused on the sample's surface, which heats up the sample pointwise. To ensure absolute absorption of the energy, a part of the sample, usually a strip, was painted black. Furthermore, it was ensured that the samples for thermal conductivity measurements meet the geometrical requirements for sample size in order to reduce boundary effects. Infrared temperature sensors are located at a fixed distance from the emitter (lead sulfide infrared receiver) and measure the sample's temperature difference before and after heating. The thermal conductivity was determined by comparison with known standards. In this study, we used the standards of quartz ($\kappa_{\text{qtz}} = 1.35 \text{ W}(\text{mK})^{-1}$) and titanium alloy ($\kappa_{\text{Ti}} = 6.05 \text{ W}(\text{mK})^{-1}$). According to the manufacturer (Lippmann and Rauen GbR; TCS No. 2010-013), the determination of thermal conductivity is subject to an absolute error of approximately 3 %.

Permeability k of the samples were determined using Darcy's Law (Darcy, 1856) and a conventional Hoek cell (Hoek and Brown, 1997) to apply the axial load, pore-fluid pressure, and confining pressure. Axial pistons and the pre-saturated samples were jacketed by a rubber tube to prevent oil from penetrating the sample, that is, a connection between confining and pore pressure. Also, confining and pore-fluid pressure were kept below the axial pressure. A hand pump was operated, supplying the axial load (12 MPa). A computer-controlled, high-pressure metering pump was used to apply confining pressure on the

sample by compressing distilled water (10 MPa). The axial pore-fluid flow was ensured through central bores in the axial loading pistons. Distilled water was pumped from a water reservoir through the lower end face of the samples either by applying constant flow rates (0.001 to 0.15 l h⁻¹) by a second, identical metering pump. The lower axial loading piston was equipped with an outlet pipe discharging fluid pressure to the atmosphere (i.e., 1 bar). The temperature and pressure of the pore-fluid were measured to calculate the temperature- and pressure-dependent fluid viscosity, according to Wagner (2009). Each permeability of the samples corresponds to the arithmetic mean value of all experiments conducted with various flow rates for steady-state fluid flow conditions.

3 Results

3.1 Field Discontinuity Observations and Fracture Connectivities

A total of 1068 discontinuity observations were recorded and classified (e.g., discontinuity type, filling, and roughness) by using the field surveys in the three outcrops in Wuppertal, Hagen Hohenlimburg, and Hönnetal (Table 2). To map all the features of the outcrop, we decided to carry out surveys at different levels of the quarry. During the field observations in Wuppertal, scanline surveys were taken in two orientations NNW–SSE and NE–SW (Fig. 3a). In contrast, the scanline investigations in Hagen Hohenlimburg and Hönnetal were conducted on two exposed rock faces each with the orientations NNW–SSE and ENE–WSW (Fig. 3b,c). Comparable scanline surveys over total lengths of 66.60, 76.15, and 62.76 m were measured in Wuppertal (461 discontinuities), Hagen Hohenlimburg (361 discontinuities) and Hönnetal (246 discontinuities), respectively. It was found that in all quarries the majority of the discontinuities were filled (Table 2). In Wuppertal most of the discontinuities were filled with debris, whereas in the other two outcrops calcite was the dominant filling material. In general, most of the ends of all discontinuities were visible in the outcrop wall. On the field scale the discontinuities had a smooth roughness and on a smaller (mesoscopic) scale they were slightly rough. The mean discontinuity trace lengths clearly differed between the outcrops, so that the largest one was determined in Wuppertal with 6.65 m and the smallest in Hagen Hohenlimburg with 1.23 m. The mean discontinuity spacing of the quarries were all in the same order of magnitude, amounting to 0.15, 0.24, and 0.27 m in Wuppertal, Hagen Hohenlimburg, and Hönnetal, respectively.

Three sets of discontinuity orientations were predominant in all outcrops (Table 3). In Wuppertal the sets were grouped into the fracture strike azimuth directions 172° (181 discontinuities), 55° (142 discontinuities), and 105° (138 discontinuities) (Fig. 4c,d; Table 6). In contrast, the discontinuity sets in Hagen Hohenlimburg and Hönnetal were oriented towards 135° (134 discontinuities), 12° (95 discontinuities), and 75° (132 discontinuities), and 176° (140 discontinuities), 65° (24 discontinuities), and 87° (82 discontinuities), respectively (Figs. 5c,d; 6c,d; Table 6). The dip angles of the discontinuities were documented very steep, that is, between 80° and 90° (dip) in all three quarries (Table 3). By further differentiating the strike directions of the classified discontinuity sets further according to their filling material no strike rotation between calcite and debris-filled fractures were identified (Fig. 7).

The statistical analysis of the three subdivided sets from Wuppertal and Hagen Hohenlimburg showed that although the mean discontinuity lengths differed significantly, the fracture densities were comparable (Table 6). In Wuppertal and Hagen Hohen-

285 limburg the fracture densities ranged from about 2.00 to 2.75 and 1.25 to 1.75, respectively. Only in Hönnetal, clear differences
in both mean discontinuity lengths and fracture densities were found between the three sets of discontinuities. Here, the mean
discontinuity length and the fracture densities amounted to 4.51, 5.57, and 2.85 m and 2.23, 0.38, and 1.31 m⁻¹, respectively.
The identified 2D fracture connectivity was about 6 to 8 times higher in Wuppertal ($P = 21.42$) than in the other outcrops
Hagen Hohenlimburg ($P = 3.71$) and Hönnetal ($P = 2.49$).

290 3.2 Laboratory Characterizations

Samples could be obtained from all outcrops of dolomitic carbonates and limestone rocks, although it was challenging to obtain
samples from the Hönnetal due to the lack of revealed outcrops. Most of the exposed Hönnetal limestone rocks were pure and
showed a low grade of dolomitization. Nevertheless, some dolomitic carbonates have been sampled. Dolomitic carbonates
samples from Hagen Hohenlimburg occurred as highly fractured rocks with karst and highly porous formations ranging from
295 a few millimeters to several centimeters.

The mean bulk densities of the samples retrieved from the outcrops in Wuppertal, Hagen Hohenlimburg, and Hönnetal were
2704 ±39, 2537 ±128, and 2620 ±46 kg m⁻³, respectively (Table 4). These mean values were determined independently of
whether they were limestone rocks or dolomitic carbonates. In Wuppertal as well as in Hagen Hohenlimburg, one dolomitic
carbonate sample was investigated in each case, which differs significantly from the other samples and was not included in the
300 calculation of the mean bulk densities. Taking into account the measurement uncertainty and standard deviation, all samples
examined showed comparable densities. A similar trend was observed for the mean grain densities, as these values are also
very close together. The mean grain densities of the samples from Wuppertal, Hagen Hohenlimburg and Hönnetal amounted
to 2801 ±51, 2777 ±41, and 2848 ±32 kg m⁻³, respectively.

Laboratory measurements to determine the total and connected porosities indicated that the dolomitic carbonates investigated
305 were significantly more porous than the limestones. This trend was evident at all quarries. On average, the volumetric proportion
of pores in the dolomitic carbonates was twice as high as in the limestones among almost all samples. Our uncertainty analysis
showed no significant volume of isolated pores, and pre-existing cracks could be determined in the investigated samples.
Considering the measurement uncertainties, the total and connected porosities overlapped (Fig. 8a).

Ultrasound P- and S-wave velocities of the dry samples ranged between 3000 and 6500 ms⁻¹ and 1300 and 3500 ms⁻¹,
310 respectively (Table 4). Regardless of the outcrop, it was shown that the dry P-wave velocities of the limestones tended to be 1000
to 1500 ms⁻¹ higher than those of the dolomitic carbonates. The Wuppertal samples have shown that the dolomitic carbonates
and limestones cannot be distinguished according to the S-wave velocities (Table 4). Both rock types had comparable S-wave
velocities. The samples of the remaining outcrops showed a clear difference in S-wave velocities between dolomitic carbonates
and limestone. In Hagen Hohenlimburg and Hönnetal the S-wave velocities of the limestones were about 500 to 1000 ms⁻¹
315 higher than those of the dolomitic carbonates. These differences were also apparent in the drained dynamic Young's moduli
(Table 4). The mean drained Young's moduli of the limestone and the dolomitic carbonates amounted to about 60 and 70 GPa,
respectively. The mean drained Poisson's ratio, that is, the relative relationship between P- and S-wave velocities, is about
0.35 for both rock types. Upon Saturation, P-wave velocities of the samples collected in Wuppertal, Hagen Hohenlimburg, and

Hönnetal increased averagely by up to 4, 11, and 14 %. This increase was also apparent in the undrained Poisson's ratios. The undrained Young's moduli hardly differ from the drained ones (Table 4).

The thermal conductivity measurements showed similar results for limestones as for dolomitic carbonates. However, a slight scattering can be observed. The dolomitic carbonate samples from Wuppertal were an exception, as these samples showed relatively high thermal conductivities that exceeded those of the limestones. On average, the highest and lowest conductivities could be determined on the Wuppertal and the Hagen Hohenlimburg samples, respectively. Measured thermal conductivities of all samples varied between 1.10 and 3.40 W (mK)^{-1} .

The permeabilities measured correlated as expected with the corresponding porosities, that is, permeability increase with an increasing proportion of connected pore volume (Fig. 8b; Table 4). The measured permeabilities of the dolomitic carbonates from Hagen Hohenlimburg are the highest and averaged to about $4.27 \times 10^{-16} \text{ m}^2$. The Hagen Hohenlimburg limestones were, on average, about three orders of magnitude less permeable than the limestones. The differences in permeability between dolomitic carbonates and limestone samples amounted to approximately two orders of magnitude in Wuppertal. In contrast, dolomitic carbonates and limestones in Hönnetal showed similar permeabilities of the same order of magnitude, that is, permeabilities in the range of 10^{-18} m^2 . Only one sample from Hönnetal was low permeable (permeability of about $4 \times 10^{-20} \text{ m}^2$), but here the associated, connected porosity was also significantly smaller than that of the comparative samples.

4 Discussion

The discontinuities of deep carbonates in the Rhine-Ruhr area were characterized and described using outcrop scanline surveys. Also, the results of laboratory investigations of density, porosity, dynamic elastic moduli, thermal conductivity, and permeability of the collected representative rock samples of the Devonian Reef Complex were presented. In the following, we correlate the field and laboratory investigations and address the geothermal potential of these deep carbonates in the Rhine-Ruhr region. We focus our results of the DFN on discontinuity length, density, orientation, and aperture. Characterizing the DFN requires access to the reservoir rock at reservoir related depth, which is not present. However, we have reasonable concerns to expect comparable discontinuity orientations in our geological subsurface model, as in our studied outcrops (Lorenz et al., 1991; Narr, 1991). For example, Narr (1991, 1996) presented how to derive DFN from drill core samples of reservoirs.

4.1 Estimating the Geological Subsurface Model of the Carbonate Reservoir

The geological setting in the Rhine-Ruhr metropolitan area is highly complex, with details still being debated (e.g., Brix et al., 1988). However, we can name large tectonic events, which have influenced local formations to a varying extent:

1. Crustal thinning, which enhanced the formation of a shelf sea during the Early Devonian (e.g., Dallmeyer et al., 2013).
2. An overall NW-movement reduced clastic sedimentation within the sea and enabled the formation of reef carbonates on the clastic shelf. Besides those clastic shelf carbonates, other reef deposits formed on volcanic mounds within

the hemipelagic realm and is the geothermal horizon of interest in this study (e.g., Franke et al., 2017; Salamon and Königshof, 2010).

3. The ongoing NW-movement, which changed the material deposits and thus finally created the Ruhr coal district during the Carboniferous (e.g., Meschede, 2018).
4. At least two different extension sequences during the Early Triassic and Early Cretaceous (Drozdowski and Wrede, 1994).
- 355 5. A NE-SW-directed shortening during the Late Cretaceous (e.g., Brix et al., 1988).
6. Further extensional regime since the Eocene (Kley, 2013).

Due to the geological formation's complexity, our underground model has been simplified concerning the most important tectonic features such as folds and faults. The foundation of our model is an approx. 150 m thick carbonate layer, dipping northwards at a dip angle of about 30 to 40 ° (see Fig. 1b; Jansen et al., 1986; Drozdowski et al., 2007). We expect this layer to be at depths between 4000 to 6000 m (DEKORP Research Group, 1990). This layer forms the Devonian basement, overlaid by interbedded sequences of sand, clay, silt, and coal layers from the Carboniferous period. These sediments can be mapped to the surface (e.g., Brix et al., 1988). Many folds and thrusts are found within these extremely complex interbedded sequences (for more details see Brix et al., 1988; Drozdowski and Wrede, 1994).

All studied outcrops are located in the large-scaled Remscheid-Altena anticline formation. However, there is a difference between the three outcrop results, which could be influenced by the regional the Remscheid-Altena anticline, different stress conditions and/or a different time of origin (Table 3). The fracture orientations were rotated according to the corresponding bedding layers (Figs. 4a, 5a, 6a) to a horizontal position (Figs. 4b, 5b, 6b). The fracture unfolding procedure indicates a similar tectonic origin for fractures sets from Wuppertal and Hagen Hohenlimburg. Fractures striking NE–SW are highly related to folding mechanism and are parallel oriented to fold axes which have been studied within the Rhine-Ruhr area (Drozdowski, 1985; Brix et al., 1988; DEKORP Research Group, 1990; Drozdowski and Wrede, 1994). The dominant fracture strike directions NNW–SSE in Wuppertal and Hagen Hohenlimburg agree with the structure of the regional Remscheid-Altena anticline (Fig. 1b) and the overall assumed mean horizontal stress direction according to the World Stress Map (Heidbach et al., 2016) and additional available stress data (Rummel and Weber, 1993). In western Germany, or to be more precise in North Rhine-Westphalia, the World Stress Map contains a wide variability of mean horizontal stress directions (Heidbach et al., 2016), which can be explained by shallow stress measurements, local anomalies due to weak coal-seams, or regional NE–SW striking thrusts. The observed strong scattering of the fracture strike directions in the dolomitic carbonates exposed in Hagen Hohenlimburg is most probably due to their hydrothermal veins' formation during the Hercynian Orogeny (Gillhaus et al., 2003) but can be also explained by recent studies of Michie (2015). Michie (2015) found a crucial correlation between fracture propagation and petrological properties of carbonate rocks, specifically grain size and sorting, porosity and uniaxial compressive strength. Furthermore, Gillhaus et al. (2003) explain that the existing NNW–SSE striking fractures are of post-Hercynian Orogeny origin. This leads to the conclusion that the investigated outcrops in Wuppertal and Hagen Hohenlimburg have been

further deformed by later tectonic events. The cause of the slightly different fault strike directions in Hönnetal cannot be specified according to the current state of scientific knowledge. The fracture formation can most likely be explained by various local and temporal stress anomalies and different formation times.

385 Brudy et al. (1997) showed no significant stress orientation changes have to be expected in the brittle crust with depth. Consequently, it is reasonable to assume that we can expect quite similar discontinuity directions in our target horizon of the deep Devonian limestone, that is, the potential geothermal reservoir. However, if the carbonate layers exposed in the investigated opencast mines are extrapolated in dip direction of bedding, the carbonate reservoir of interest is approximately located below the cities Essen, Bochum, and Dortmund at a depth of 4000 to 6000 m (Fig. 2). This extrapolation of the carbonates in dip
390 direction corresponds in this case approximately to the direction of the main horizontal stress (Heidbach et al., 2016; Rummel and Weber, 1993) with respect to the simplified geological setting (Fig. 1a). This assumption allows us to predict local DFN in the deep Devonian limestone (i.e., naturally fractured carbonate reservoir), whose exact depth and characteristics should be verified by additional geophysical prospecting techniques to further describe the geothermal potential of this reservoir (e.g., Hirschberg et al., 2015).

395 We carried out laboratory experiments under ambient and elevated pressure conditions to gain insights into the potential reservoir's petrophysical properties. The derived porosities of the limestone samples are in agreement with literature values between 1 and 6 % (Fig. 8a; c.f. Gebrande, 1982). The porosity of carbonate rocks may increase by a wide variety of processes. Next to dissolution, cementation, and recrystallization, the process of dolomitization is the most common one. Dolomitization describes the geochemical process of replacing Ca ions by Mg ions, forming dolomite from calcite: $2\text{CaCO}_3 + \text{Mg}^{2+} \rightarrow$
400 $\text{CaMg}(\text{CO}_3)_2 + \text{Ca}^{2+}$. Lucia et al. (2007) pointed out that dolomitization may increase the carbonate's porosity by 13 %. This correlates fairly well with our results (cf. Fig. 8a). Consequently, porosity measurements are in accordance with the field study's outcome: porosity decreases towards core reef formation, in agreement with Homuth et al. (2015b).

The P- and S-wave velocities and the matrix permeabilities and dynamic mechanical properties derived in the laboratory provide statistical information for further numerical simulations of the reservoir. The thermal conductivity results are appropriate
405 for the analyzed rock formations (c.f. Čermák and Rybach, 1982; Clauser and Huenges, 2013; Jorand et al., 2015). The low connected porosities match with the determined permeabilities. Compacted limestone (Massenkalk), which is characterized by a low connected porosity, showed the lowest permeability, whereas the dolomitic carbonates showed an inverse relation (see Fig. 8b). However, the results of the determined matrix permeability seem to be comparable with similar geothermal reservoirs (e.g., Homuth et al., 2015a), we do not expect sufficient reservoir permeability in 4000 and 6000 m depth. Therefore, we have
410 focused on potential DFN within the geothermal reservoir, whose influence on fluid flow in fractured reservoirs has already been discussed in detail (e.g., Guerriero et al., 2013).

4.2 Evaluating a Discrete Fracture Network in the Carbonate Reservoir: From Outcrop and Laboratory Measurements to Implications for Fluid Flow on Reservoir Scale

The uncertainties associated with the description of naturally fractured systems and DFN are strongly dependent on sampling
415 effects such as truncation or censoring (Bonnet et al., 2001; Baecher and Christian, 2005). Truncation effects explain the

influence of underestimating small characteristics due to the resolution of the sampling method, that is, outcrop and survey size. Censoring effects occur when broad characteristics are incompletely observed due to the outcrop size mentioned or when characteristics are selected due to subjective choice (Priest and Hudson, 1981; Lacazette, 1991). While the truncation effects can be reduced by a sophisticated set of data and resolution, the censoring effect can be reduced depending on the method applied, adapted technology, and the amount of data obtained (Santos et al., 2015). In the literature, these uncertainties are typically described as aleatory and epistemic (Der Kiureghian and Ditlevsen, 2009). Various survey methods and their corrections concerning the effects mentioned are described in more detail in Bonnet et al. (2001).

The approach we have chosen to use the scanline survey method described by Priest and Hudson (1981) is a widely accepted method for the characterization of fracture networks (e.g., La Pointe and Hudson, 1985; Lacazette, 1991; Narr, 1996). The advantages of the method are especially the acquisition time and the associated verification as well as the acquisition costs compared to other methods (e.g., LIDAR outcrop survey; Wilson et al., 2011). The uncertainties due to scanline surveys are generally known and have been critically questioned for decades (e.g., Terzaghi, 1965; Cruden, 1977; La Pointe and Hudson, 1985; Ganoulis, 2008). However, due to the long period of application, the method explained by Priest and Hudson (1981) has been adapted for a variety of geological and outcrop settings, which leads to various error corrections regarding the application case. This allows us to keep the limitations and sources of error as low as possible. We pursued the concerns about epistemic uncertainties and identified the main problems in defining representative areas' locations to evaluate a discrete fracture network in the carbonate reservoir in the Rhine-Ruhr area.

4.2.1 Orientation, Roughness, and Filling of the Fracture Network

The architecture of each open pit mine studied is directly related to the directions of the dominant discontinuities, that is, NNW–SSE and NE–SW (Fig. 3). In addition, the direction NW–SE was documented as another dominant discontinuity direction. These findings fit with the general observations documented in the literature (e.g., Brix et al., 1988; Drozdowski and Wrede, 1994). Nickelsen and Hough (1967) and Roberts (1974) investigated discontinuity orientations in sedimentary layers with respect to the maximum horizontal stress and their corresponding filling material. The orientations of the respective structures in their area are almost identical to the values we measured. They concluded that the discontinuity directions can be related to residual stresses and stress release during past unloading regimes, which might be transferable to our studied areas (Fig. 7). Besides, our roughness analyses revealed predominating smooth fracture surfaces on the field scale ($> 10^{-1}$ m) and mainly slightly rough fracture surfaces on the mesoscopic scale ($\leq 10^{-1}$ m) (Table 2). Considering the numerous tectonic events and its repetitive reactivation of pre-existing fractures, smooth fractures tend to be reasonable in the deep carbonate horizon of interest. Since other studies have already observed that the orientations of regional fractures are continuous and consistent over large areas of several thousand square meters (Kelley and Clinton, 1960; Stearns and Friedman, 1972; Hancock and Bevan, 1987), we assume comparable consistency and distribution for the discontinuity sets recorded.

The separate consideration of the three respective discontinuity sets per quarry (Figs. 4b, 5b, 6b; Table 6), as well as the distinction between fractures filled with calcite or debris shows us that the mean orientation of one discontinuity set (set 1; Fig. 7) matches remarkably well with the prevailing orientation of the principal horizontal stress (i.e., orientation NNW–SSE)

450 (Fig. 1; Heidbach et al., 2016; Rummel and Weber, 1993). We could not detect any rotation between the strike direction of calcite and debris-filled fractures (Fig. 7). Hence, the maximum horizontal stress may have changed only slightly, if at all, in the time between the formation of the calcite and the debris-filled fractures. Therefore, we assume that the fracture orientation in the reservoir is comparable to the ones observed in the representative outcrops. In addition to the fractures' relative orientation to the direction of the main principal stress, the filling is also decisive for whether the fractures are potentially open or closed
455 in the subsurface (Laubach et al., 2004). More than half of all our observations showed paleo filling materials such as calcite and in addition, approximately 17 % showed calcite enriched slickensides on the fracture surface (Fig. 7). Thus, apart from the orientation, no differences in occurrence between calcite and debris-filled fractures can be detected, and we must further consider the orientation of the fractures. Even if we cannot predict it with certainty, pre-existing discontinuities oriented parallel to the principal horizontal stress could be observed openly, while discontinuities oriented perpendicular to this stress tend to be
460 closed (Lorenz et al., 1991). Accordingly, the highest fracture permeability can be expected in NNW–SSE direction. But there might be open fractures that are not necessarily aligned in the principal stress direction and are still open. This is particularly true for fractures that are filled, for example, with cement (Laubach et al., 2004). In general terms, a large number of fractures might be paleo fluid-flow paths striking in NNW–SSE direction, which could be exploited by advanced drilling methods (e.g., hydraulic fracturing; Dahi Taleghani and Olson, 2013) for future geothermal applications.

465 Before utilizing, the material changes between host rock and vein material might predict fracture orientations in depth by further geophysical driven studies (e.g., density changes, reflection coefficients). Further studies have to prove if the material change between the encountered filling materials and the host rock is sufficient for seismic interpretation. Considering the typical seismic resolution concerning the depth of investigation and fracture aperture, individual discontinuities will probably not be resolved (Martin et al., 2006). However, the fracture density may be sufficient to demonstrate macroscopic anisotropy
470 using seismic methods (Löer et al., 2018).

4.2.2 Connectivity of the Fracture Network

Comparing the discontinuity trace lengths with the true discontinuity spacing gives a first idea of the connectivity of the fracture network. Predominantly discontinuities with short trace lengths occur on the field scale (Figs. 4d, 5d, 6d). This observation was made for all exposed outcrop faces in all three quarries. Almost 70 % of the recorded discontinuities classified as "both
475 ends visible" tended to be between 1 and 2 m long (Table 3). It is conceivable that the observed trace lengths increase with increasing outcrop length and height. The recorded end types suggest that 40 % of all discontinuities investigated exceeded the observed outcrop height (Table 3). In other words: 40 % of all measured trace lengths are highly probably underestimated by the method. This source of error was attempted to be minimized by the censored semi-trace length analysis (Equation 2). Contrary, 60 % of all joints counted showed a start and end tip (Table 2). However, a full 3D discontinuity analysis of the entire
480 quarry will likely reflect better trace length results depending on the accuracy. At this point, economic considerations must be made regarding the required survey accuracy and associated costs.

The results of the 2D fracture connectivity analysis clearly show that the reservoir in Wuppertal has the highest average 2D fracture connectivity, that is, an average number of discontinuity intersections per discontinuity of 21.42 (Table 6). Both the

fracture density and the mean discontinuity length of each discontinuity set are significantly higher in Wuppertal than in the
485 other outcrops (Table 6). Accordingly, we can assume that this reservoir probably has considerable geothermal potential due
to its fracture network. For the Hönnetal reservoir, a discontinuity intersections per discontinuity of 3.71 was determined. One
reason for this relatively low value is the reservoir's location on the anticline axis and the associated tectonics (Fig. 1). Although
the recorded fractures in Hagen Hohenlimburg exhibit the greatest variety of strike directions (Fig. 5), the estimated 2D fracture
connectivity is the lowest at this location due to the short discontinuity lengths and the associated low fracture densities (Table
490 6). Based on the observations of many karst formations and altered host rocks by hydrothermal veins in Hagen Hohenlimburg,
we conclude that there might be a higher permeability in the Hagen Hohenlimburg reservoir and the surrounding areas than
in the other studied areas. However, the distribution of this reservoir in the subsurface is still under debate (e.g., Salamon and
Königshof, 2010) and its conditions due to karstification still have to be proven.

The densities of the dolomitic carbonates and limestones determined in the laboratory did not show significant differences,
495 which was to be expected (Table 4). However, the comparatively high porosity of the dolomitic carbonates indicated a moderate
pore and crack volume. Consequently, a higher density of potentially hydraulically stimulated pores and cracks (or fracture
network) can be expected in the dolomitic carbonate layers on the field scale. On the other hand, the comparable densities
pose a warning regarding the unreflected interpretation of, for example, density measurements in naturally fractured carbonate
reservoirs. Such measurements do not appear to be very useful for differentiating between low porous limestone and relatively
500 high porous dolomitic carbonates.

The influence of pore and crack volume in the dolomitic carbonate samples was also reflected in the measured ultrasonic
velocities (Table 5). The dolomitic carbonate samples showed the lowest P-wave velocities. The S-wave velocities of dolomitic
carbonates and limestones hardly differ, which align with the given densities. Therefore, a warning must be given at this
point, because it is crucial to observe the temporal and spatial variation of elastic wave velocities during a potential reservoir
stimulation of a dolomite and limestone reservoir in order to conclude on its properties and composition. In the next stage, these
505 findings can be of great importance for interpreting flow rates in the deep carbonate reservoir. Ahrens et al. (2018) demonstrated
a uniform correlation between P-wave velocity and the key parameter for transient flow processes experimentally, that is,
hydraulic diffusivity, in the direction of fluid flow during inelastic deformation. Their observation allows the conclusion that
monitoring variations in P-wave velocities in field studies can indicate changing fluid flow rates, for example, in developing
510 reservoirs. Consequently, these measurements have the potential to provide insights into the deformation state, connectivity,
and hydraulic properties of pore and fracture networks in the reservoir.

The low impact of the fluid saturation on the samples' dynamic moduli indicates that heterogeneous pore and crack networks
prevail in the investigated samples (Table 5). In the samples' measuring or drilling direction, only a small increase of the
P-velocities and thus also of the undrained dynamic moduli occurs. This indicates that the connected pore and crack space
515 tends to be locally distributed (c.f. upper Hashin-Shtrikman bound for a simplified two-phase carbonate material; Hashin and
Shtrikman, 1963), since ultrasonic velocities only characterize the momentary elastic behavior along a wave path, which was
chosen by the waves due to its above-average rigidity. On the scale of wavelength, the samples are thus probably heterogeneous.
Moreover, a velocity anisotropy should also prevail, which is particularly relevant for seismic surveys. However, a possibly

existing heterogeneous and local distribution of the pore and crack volume has the advantage that it is more likely to encounter
520 large pores and long and wide open cracks than possible with a homogeneous porosity distribution. It can be assumed that the
heterogeneity possibly favors the fluid flow.

Through hydraulic stimulation, however, the fractures prevailing there and their networks could be reactivated, thus increasing
the permeability even though this prediction depends on the fracture network's orientation in the stress field and the fluid
pressure. However, it is indispensable for geothermal projects to carry out a seismic risk [analysis](#) before planning to manipulate
525 the local stress conditions, that is, the reactivation of fractures.

5 Conclusion

We investigated the geothermal potential of a carbonate reservoir in the Rhine-Ruhr area, Germany, by combining outcrop
scanline surveys of pre-existing discontinuities and laboratory measurements of petrophysical properties on sample scale. The
target horizon of interest is an approximately 150 m thick and widely distributed compacted limestone layer (Massenkalk) from
530 Late Devonian in 4000 to 6000 m depth, dipping northwards at a dip angle of about 30 to 40°. If we extrapolate the course
of the exposed Devonian limestone layers, which were investigated at three outcrop analogs, in the direction of the maximum
horizontal stress, the carbonate reservoir [could hypothetically](#) extend below Essen, Bochum, and Dortmund.

[Our petrophysical laboratory measurements on representative outcrop samples showed insufficient matrix porosity, permeability, and thermal conductivity for geothermal energy production. However, our outcrop surveys revealed that it could be](#)
535 [a naturally fractured carbonate reservoir. Generally, three discontinuity sets striking in NNW–SSW, NW–SE, and NE–SW directions with dipping angles between 80 and 90° were measured. Considering the numerous tectonic events in the Rhine-Ruhr region and the resulting repeated reactivation of pre-existing fractures, slightly smooth fracture surfaces are more likely to occur in the reservoir. We propose to focus on fractures that are approximately NNW–SSE oriented for upcoming geothermal applications, bearing in mind that this direction is approximately parallel to the main horizontal stress according to the](#)
540 [World Stress Map. Thus, these fractures could most likely be open and therefore productive. Although the fractures may not be open, more than half of them showed paleo-filling materials such as calcite beside calcite-enriched slicksides, giving them the potential to be reactivated and improve fluid flow in the carbonate reservoir.](#)

Based on the mean fracture length, spacing, and orientation observed at the surface and our fracture connectivity analysis, the
reservoir at depth most likely has a well-connected network of fractures. Especially the hypothetical fractured carbonate forma-
545 tion below Essen could most likely have the comparatively best-connected fracture network, since a high fracture connectivity
could be determined for the corresponding reference reservoir in Wuppertal. Despite, we conclude that the permeability is
more significant in the Devonian reef regions facies than in the other areas investigated because of the presence of many karst
formations and altered host rocks by hydrothermal veins. This assumption was also confirmed by our laboratory measurements,
[whose results suggest the presence of heterogeneities that may favor fluid flow.](#)

550 Our [study](#) may provide the basis for improved subsurface characterization concerning the structure and characteristics of the
naturally fractured Devonian limestone reservoir in the Rhine-Ruhr area. More sophisticated geophysical prospecting tech-

niques and a combination of pressure and temperature dependent laboratory measurements have to be elaborated to verify the reservoir depth, orientation as well as its fracture density and connectivity. **It must be demonstrated whether the prevailing fracture network can be reactivated, thereby improving the fluid flow in the carbonate reservoir.** In addition, the local stress field should be further verified in follow-up studies. The understanding of the fracture network's structural characteristics and **physical properties** and their impact reservoir properties that in turn defines the geothermal potential will benefit from, for instance, seismic surveys and in-situ measurements in a pilot borehole.

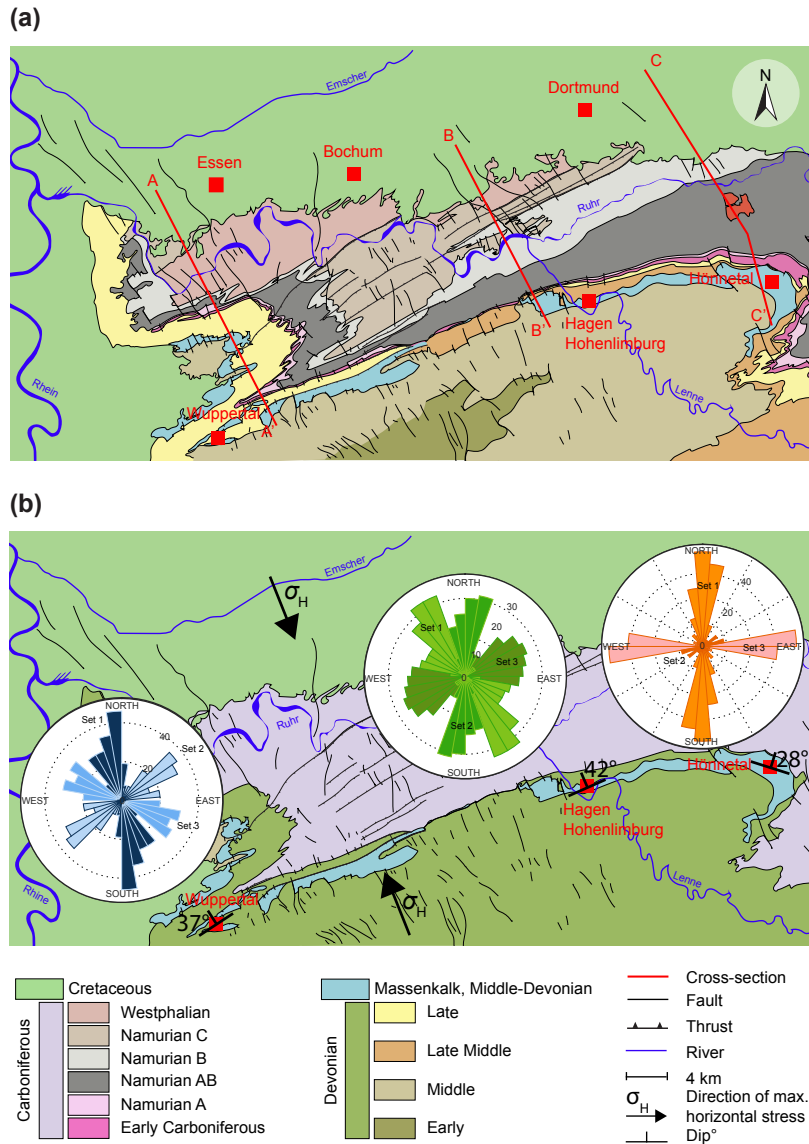


Figure 1. (a) Simplified geological map of the Rhine-Ruhr metropolitan area, Germany (modified after Jansen et al., 1986; Drozdowski et al., 2007). Here, three stone pits have been chosen for field surveys: Osterholz (Wuppertal), Oege (Hagen), and Asbeck (Hönnetal), which are part of the Devonian Reef Complex (Massenkalk). The red lines indicate the three geological cross-sections as shown in Figure 2. In (b), the geological map from (a) was further simplified and in addition the rose diagrams of the discontinuity sets as measured by scanline investigations at the quarries in Wuppertal (blue), Hagen Hohenlimburg (green), and Hönnetal (orange) are added (for more details see Figs. 4 to 6). The arrows indicate the direction of maximum horizontal stress σ_H according to the World Stress Map (Heidbach et al., 2016). The specific directions and angles of incidence of the investigated, exposed Limestone layers are also shown in (b).

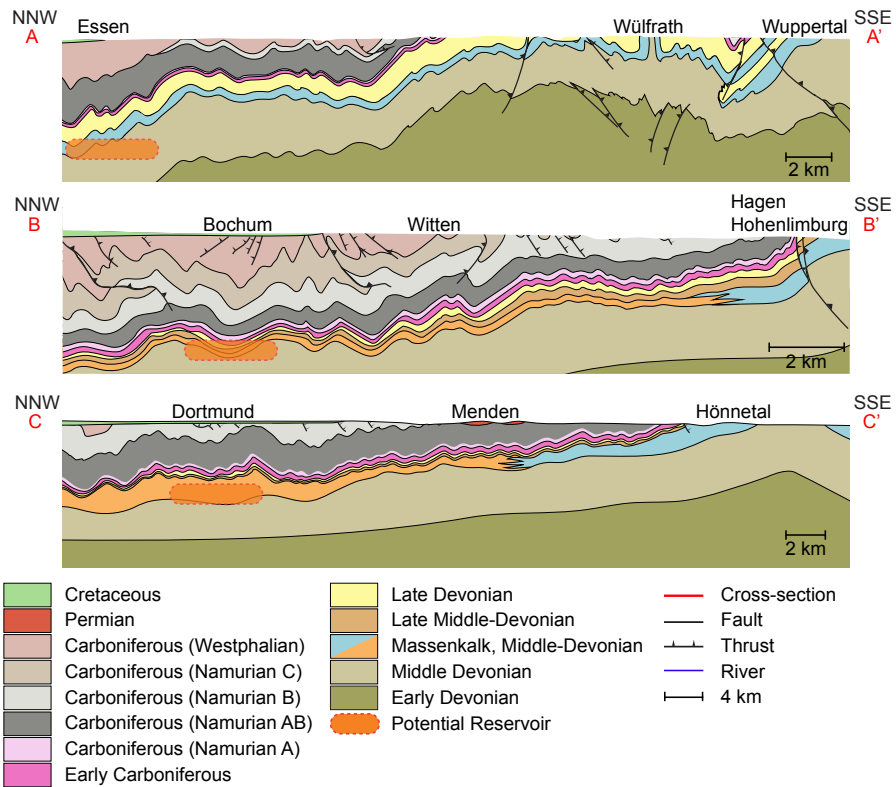


Figure 2. Simplified cross-sections of the Remscheid-Altena anticline (modified after Jansen et al., 1986; Drozdowski et al., 2007). The exact position and orientation of the three cross-sections is illustrated in Figure 1a.

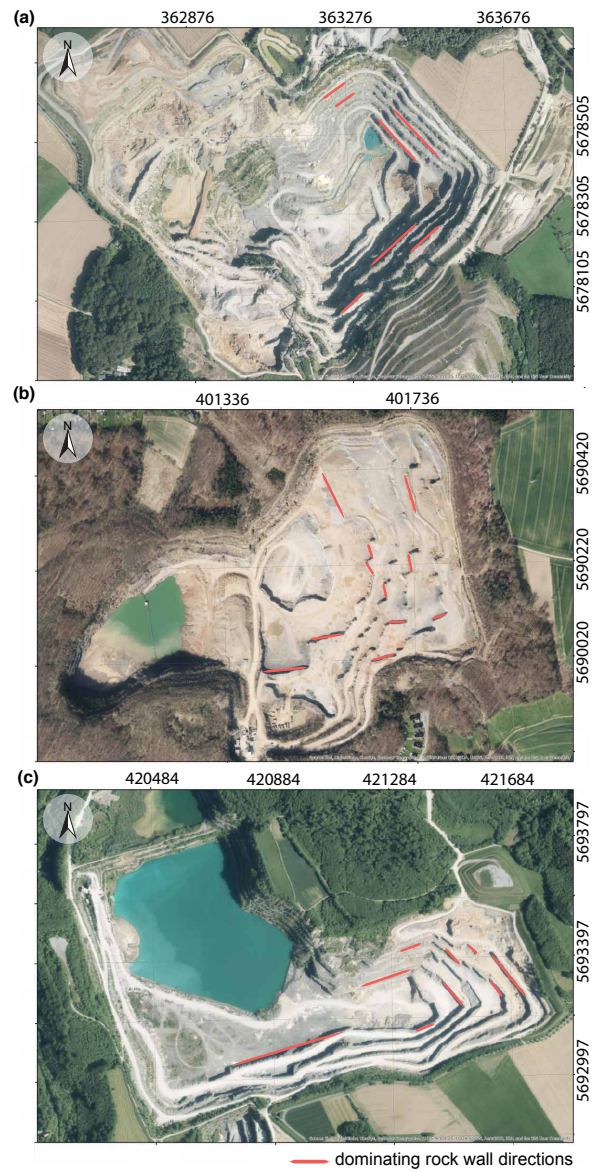


Figure 3. Map view of all three study areas in which scanline surveys were carried out: (a) The Osterholz stone pit, which was operated by Kalkwerke H. Oetelshofen GmbH & Co. KG in Wuppertal. (b) The Oege stone pit operated by Hohenlimburger Kalkwerke GmbH in Hagen Hohenlimburg. (c) The Asbeck rock mine managed by Lhoist Deutschland, Rheinkalk GmbH in Hönnetal. Red lines indicate the predominant rock walls, that is, the direction of mining. In each of the three outcrops there were two dominant mining directions, which were approximately perpendicular to each other. This figure was created using ArcGIS® software by Esri (Basemap, World Imagery: <http://www.arcgis.com/home/item.html?id=10df2279f9684e4a9f6a7f08febac2a9>). ArcGIS© and ArcMap™ are the intellectual property of Esri and are used herein under license. Copyright © Esri. All rights reserved. For more information about Esri™ software, please visit www.esri.com.

Table 1. Overview of the documented discontinuity properties and their classification as defined for scanline surveys (modified after (Markovaara-Koivisto and Laine, 2012)). In our observations we distinguish between open, closed, and filled fractures. Open fractures are those that are neither filled with calcite nor with debris. Closed fractures are in fact joints. Filled fractures are not categorized as closed ones, since both fracture surfaces are not in direct contact with each other. Filled fractures can either be filled with calcite or with debris. The roughness of the discontinuities was classified on field scale ($> 10^{-1}$ m) and on mesoscopic scale ($\leq 10^{-1}$ m).

property	class			
	1	2	3	4
discontinuity type	open	closed	filled	slickensides
ending type	through going	both ends visible	one end visible	neither ends visible
roughness on field scale	smooth	slightly rough	rough	–
roughness on mesoscopic scale	smooth	slightly rough	rough	–
filling	calcite	debris	–	–

Table 2. Overview of the recorded properties and their classification of the measured discontinuities in the three studied outcrops in Wuppertal, Hagen Hohenlimburg, and Hönnetal. See text and Table 1 for a detailed description of the classes.

outcrop	property	class				total
		1	2	3	4	
Wuppertal	discontinuity type	129	110	113	109	461
	ending type	4	356	93	8	461
	roughness at field scale	354	81	26	–	461
	roughness at mesoscopic scale	159	250	52	–	461
	filling	116	154	–	–	270
Hagen Hohenlimburg	discontinuity type	86	52	156	67	361
	ending type	20	300	37	4	361
	roughness at field scale	194	116	51	–	361
	roughness at mesoscopic scale	77	184	100	–	361
	filling	160	98	–	–	258
Hönnetal	discontinuity type	51	51	121	23	246
	ending type	29	116	96	5	246
	roughness at field scale	216	26	4	–	246
	roughness at mesoscopic scale	55	155	36	–	246
	filling	137	51	–	–	188
all outcrops	discontinuity type	266	213	390	199	1068
	ending type	53	772	226	17	1068
	roughness at field scale	764	223	81	–	1068
	roughness at mesoscopic scale	291	589	188	–	1068
	filling	413	303	–	–	716

Table 3. Overview of the settings and the results of the scanline surveys performed on rock walls in the outcrops Wuppertal (WOH), Hagen Hohenlimburg (HKW), and Hönnetal (HLO). The abbreviations MKY, MKB, and MKR correspond to the coloured rock types Massenkalk yellow (dolomite), Massenkalk black (limestone), and Massenkalk red (dolomite), respectively. Three main families or sets of discontinuity orientations were found to be predominant in all outcrops.

scanline survey	l_{scan}	n	\bar{l}_{dis}	\bar{h}_{dis}	\bar{d}_{dis}	discontinuity orientation (dipdir/dip)		
	(m)	(-)	(m)	(m)	(m)	set 1	set 2	set 3
WOH-2-MKB-1	9.70	74	1.63	< 0.01	0.13	329/89	237/84	–
WOH-3-MKB-1	12.22	84	1.64	< 0.01	0.15	259/87	190/87	–
WOH-4-MKB-1	14.10	58	2.31	< 0.01	0.25	265/85	150/86	–
WOH-4-MKB-2	8.10	39	0.92	< 0.01	0.20	146/70	193/81	270/88
WOH-4-MKY-1	5.92	81	3.14	< 0.01	0.08	247/89	198/88	–
WOH-4-MKY-2	3.94	44	0.56	< 0.01	0.09	261/84	203/65	–
WOH-5-MKB-1	10.10	59	0.87	< 0.01	0.20	259/87	135/77	–
WOH-5-MKB-2	2.52	22	0.85	< 0.01	0.11	268/83	313/69	038/69
HKW-2-MKB-1	17.40	41	2.75	0.02	0.43	240/87	–	–
HKW-2-MKB-2	9.90	42	3.58	0.03	0.24	333/71	–	–
HKW-3-MKB-1	5.80	36	0.77	< 0.01	0.19	290/89	348/70	–
HKW-3-MKB-2	4.75	30	0.54	< 0.01	0.22	194/71	–	–
HKW-1-MKY-1	17.30	97	0.58	< 0.01	0.21	207/83	–	–
HKW-4-MKB-1	6.80	40	0.54	< 0.01	0.20	277/87	175/81	–
HKW-5-MKB-1	7.43	14	0.76	< 0.01	0.28	212/82	–	–
HKW-5-MKY-4	6.80	46	0.23	< 0.01	0.36	351/86	284/82	212/82
HLO-4-MKB-1	13.66	50	3.31	< 0.01	0.30	351/75	–	–
HLO-4-MKB-2	10.00	49	2.32	< 0.01	0.21	176/77	–	–
HLO-6-MKB-1	17.70	34	6.77	0.06	0.53	254/87	018/86	–
HLO-6-MKB-2	10.80	30	3.55	0.01	0.40	253/81	134/74	195/86
HLO-6-MKB-3	10.60	84	4.67	0.02	0.14	271/89	–	–

l_{scan} : scanline length; n : number of discontinuities; \bar{l}_{dis} : mean trace length; \bar{h}_{dis} : mean discontinuity aperture; \bar{d}_{dis} : mean discontinuity spacing. The resolution of the length measurements amounts to 0.01 m.

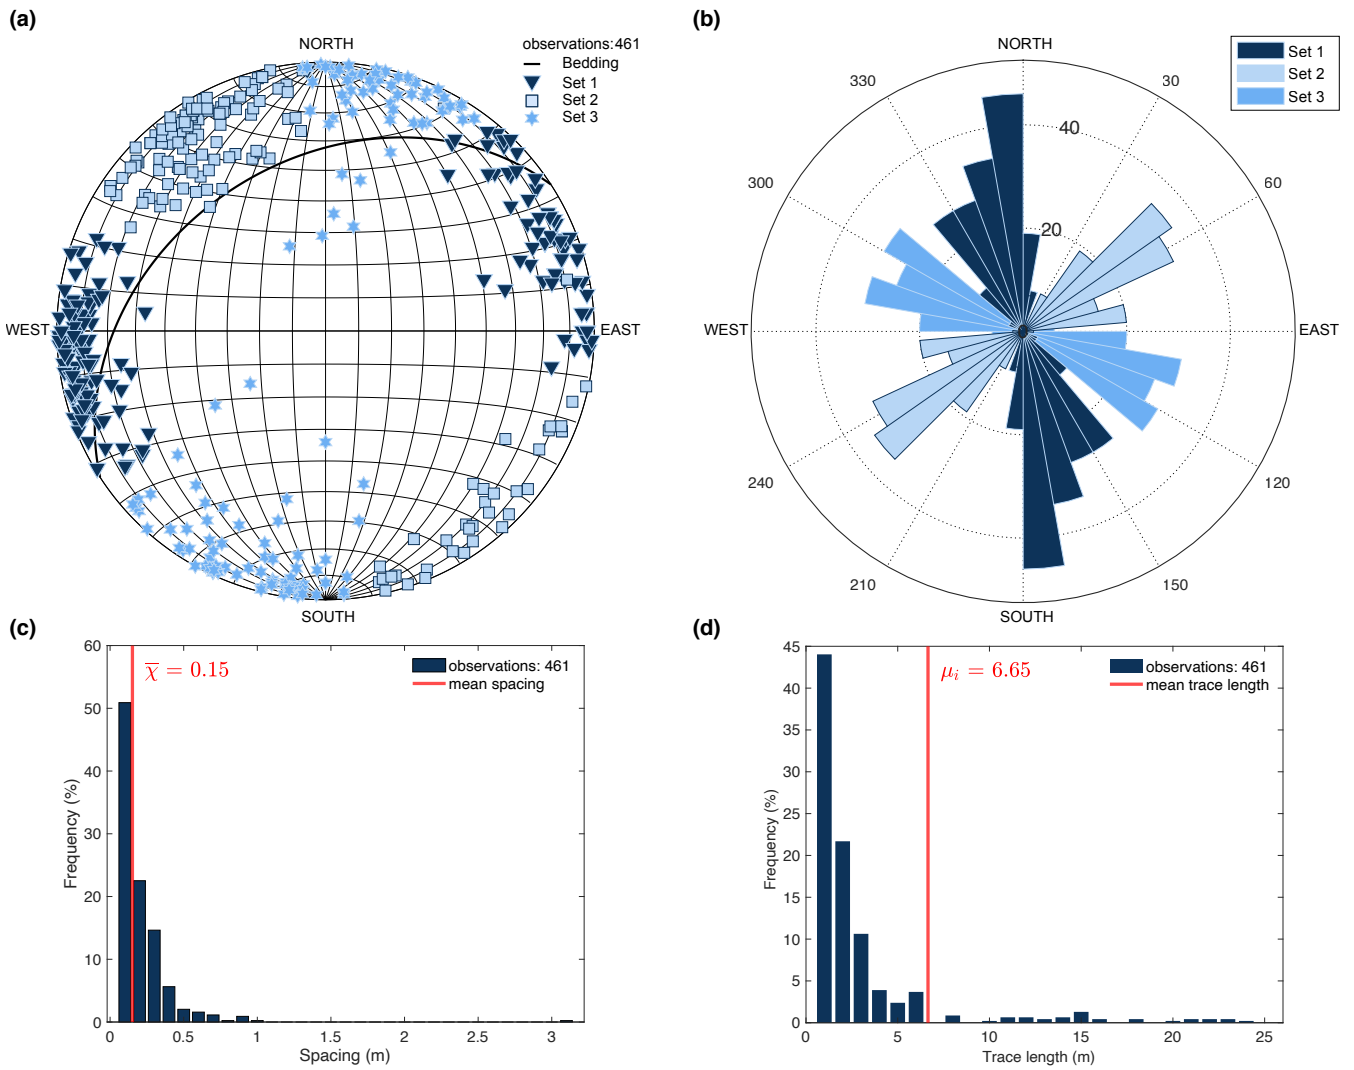


Figure 4. Results of all scanline investigations at the quarry in Wuppertal: (a) stereogram of measured discontinuity sets, (b) rose diagram of rotated fracture orientations according to the bedding layer in (a) to a horizontal position, (c) discontinuity spacing diagram, and (d) discontinuity trace length diagram.

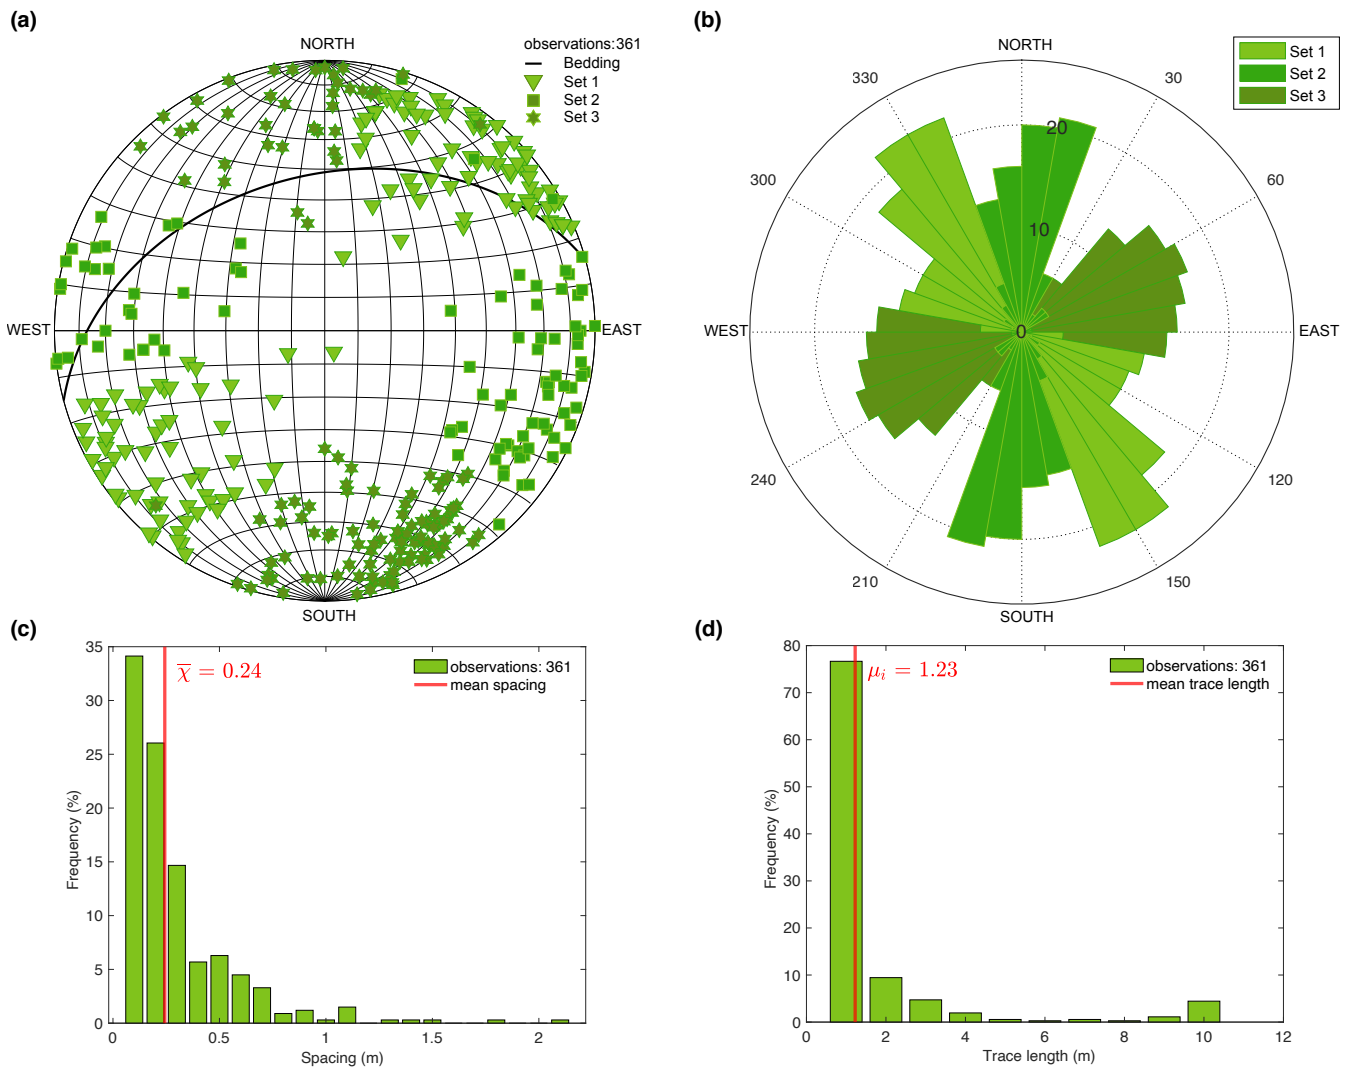


Figure 5. Results of all scanline investigations at the quarry in Hagen Hohenlimburg: (a) stereogram of measured discontinuity sets, (b) rose diagram of rotated fracture orientations according to the bedding layer in (a) to a horizontal position, (c) discontinuity spacing diagram, and (d) discontinuity trace length diagram.

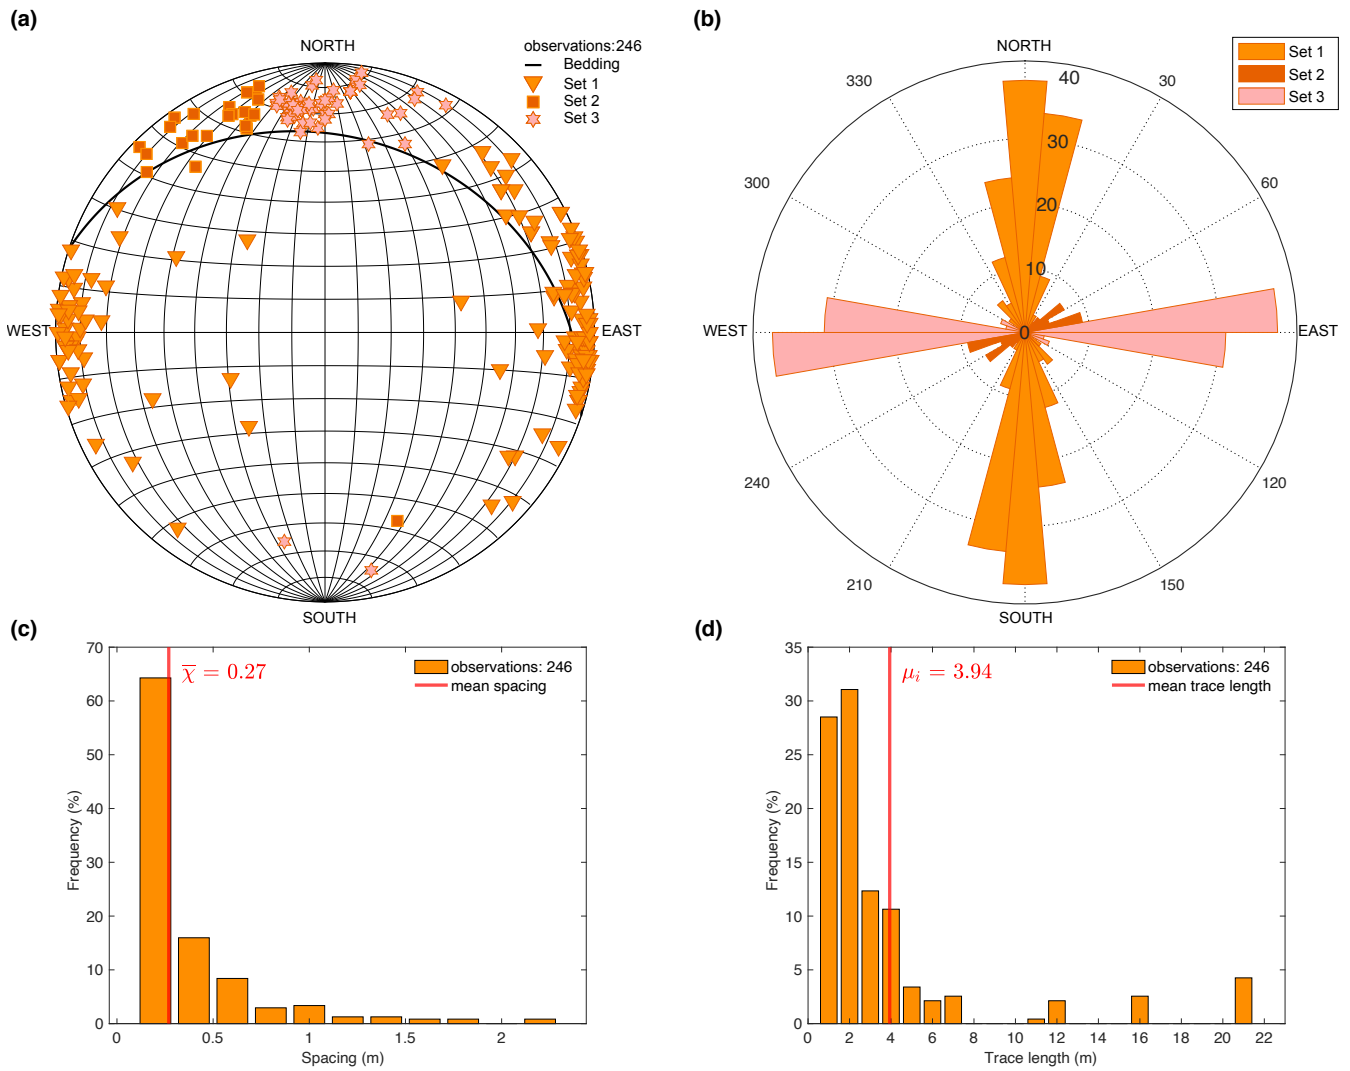


Figure 6. Results of all scanline investigations at the quarry in Hönnetal: (a) stereogram of measured discontinuity sets, (b) rose diagram of rotated fracture orientations according to the bedding layer in (a) to a horizontal position, (c) discontinuity spacing diagram, and (d) discontinuity trace length diagram.

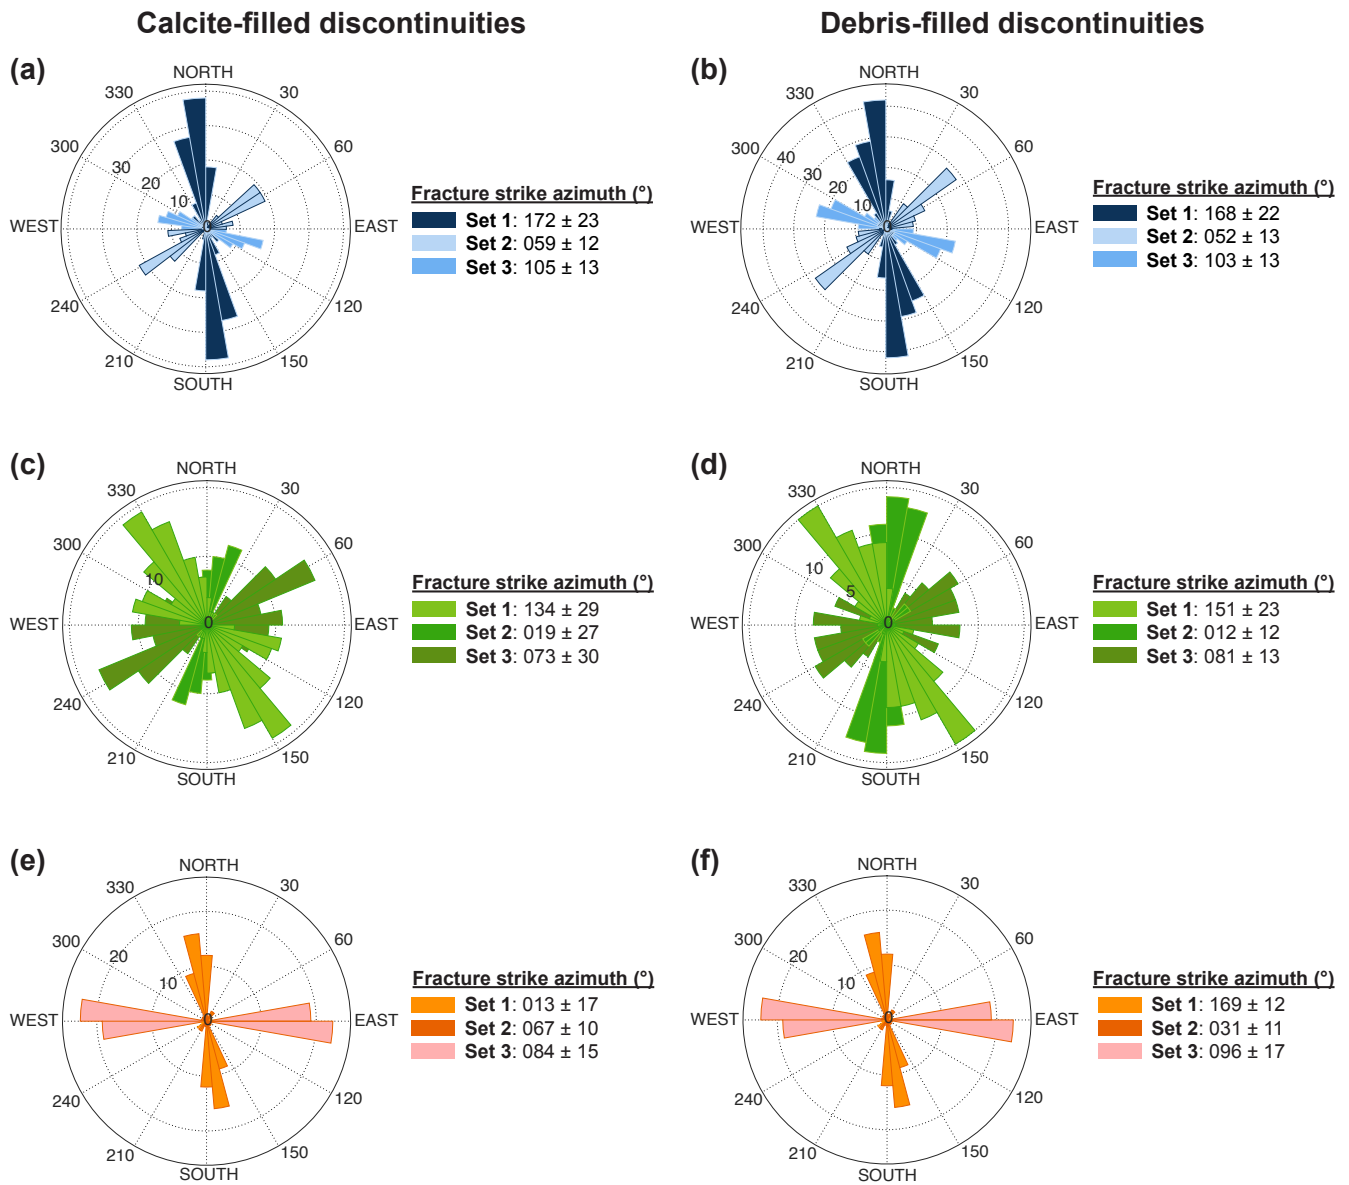


Figure 7. Rose diagrams of **measured** discontinuity sets at the quarries (a, b) Wuppertal, (c, d) Hagen Hohenlimburg, and (e, f) Hönnetal as a function of their fracture filling, that is, whether the fractures are filled with (a, c, e) calcite or (b, d, f) debris. **The fracture strike azimuths given next to the figures correspond to the arithmetic mean values and the corresponding standard deviations.**

Table 4. Matrix properties, permeabilities, and thermal conductivities as determined by laboratory measurements on limestone and dolomite samples from Wuppertal (WOH), Hagen Hohemlimburg (HKW), and Hönnetal (HLO). The abbreviations MKY, MKB, and MKR indicate the colored rock types Massenkalk yellow (dolomite), Massenkalk black (limestone), and Massenkalk red (dolomite), respectively.

sample	l (mm)	ρ_{geo} (kg m^{-3})	ρ_{grain} (kg m^{-3})	ϕ_{tot} (%)	ϕ_{con} (%)	k (m^2)	κ_{dry} (W (m K)^{-1})
WOH-4-MKY-3 A	62.28	2695 ± 7	2801 ± 1	4.1 ± 1.8	4.1 ± 0.7	$(2.90 \pm 0.10) \times 10^{-18}$	2.64 ± 0.08
WOH-4-MKY-3 B	83.99	2787 ± 7	2830 ± 1	1.5 ± 1.8	6.0 ± 1.0	$(1.80 \pm 0.07) \times 10^{-18}$	3.02 ± 0.09
WOH-4-MKY-3 C	55.08	1755 ± 5	—	—	2.5 ± 0.4	$(5.30 \pm 0.20) \times 10^{-17}$	3.33 ± 0.09
WOH-4-MKB-1 A	83.53	2706 ± 7	2712 ± 1	0.2 ± 1.8	1.7 ± 0.3	$(1.90 \pm 0.07) \times 10^{-20}$	2.62 ± 0.08
WOH-4-MKB-1 B	82.05	2698 ± 7	2801 ± 1	3.7 ± 1.8	1.7 ± 0.3	$(1.60 \pm 0.06) \times 10^{-19}$	2.63 ± 0.08
WOH-4-MKB-1 C	82.91	2704 ± 7	—	—	1.7 ± 0.3	$(1.90 \pm 0.07) \times 10^{-20}$	2.63 ± 0.08
HKW-4-MKR-1 A	29.18	2558 ± 8	2771 ± 1	7.7 ± 1.8	7.1 ± 1.2	$(2.20 \pm 0.09) \times 10^{-16}$	2.18 ± 0.06
HKW-4-MKR-1 B	41.59	2420 ± 7	2779 ± 1	12.9 ± 1.8	14.0 ± 2.3	$(1.00 \pm 0.04) \times 10^{-15}$	3.36 ± 0.10
HKW-4-MKR-1 C	39.31	2018 ± 6	—	—	14.7 ± 2.4	$(7.60 \pm 0.32) \times 10^{-16}$	2.38 ± 0.07
HKW-4-MKY-2 A	39.39	2389 ± 7	2770 ± 1	13.8 ± 1.8	10.7 ± 1.8	$(2.40 \pm 0.10) \times 10^{-17}$	2.19 ± 0.06
HKW-4-MKY-2 B	34.13	2420 ± 7	2768 ± 1	12.9 ± 1.8	10.3 ± 1.7	$(1.30 \pm 0.05) \times 10^{-16}$	2.13 ± 0.06
HKW-5-MKB-1 A	83.89	2682 ± 7	2777 ± 1	3.4 ± 1.8	1.8 ± 0.3	$(4.90 \pm 0.20) \times 10^{-20}$	2.62 ± 0.08
HKW-5-MKB-1 B	74.30	2660 ± 7	2772 ± 1	4.0 ± 1.8	2.7 ± 0.4	$(1.40 \pm 0.06) \times 10^{-18}$	2.56 ± 0.08
HKW-5-MKB-1 C	76.92	2707 ± 7	—	—	1.3 ± 0.2	$(2.40 \pm 0.10) \times 10^{-19}$	2.52 ± 0.08
HLO-6-MKY-1 A	80.43	2541 ± 7	2820 ± 1	9.9 ± 1.8	4.6 ± 0.8	$(6.60 \pm 0.26) \times 10^{-18}$	2.33 ± 0.07
HLO-6-MKY-1 B	57.01	2621 ± 7	2875 ± 1	8.8 ± 1.7	5.6 ± 0.9	$(3.30 \pm 0.13) \times 10^{-18}$	2.45 ± 0.07
HLO-6-MKY-1 C	58.05	2611 ± 5	—	—	5.6 ± 0.9	$(4.20 \pm 0.17) \times 10^{-18}$	2.15 ± 0.06
HLO-6-MKB-3 A	81.32	2682 ± 7	2820 ± 1	4.9 ± 1.8	2.4 ± 0.4	$(3.80 \pm 0.15) \times 10^{-20}$	2.67 ± 0.08
HLO-6-MKB-3 B	47.16	2643 ± 7	2875 ± 1	8.1 ± 1.7	4.3 ± 0.7	$(2.60 \pm 0.10) \times 10^{-18}$	2.71 ± 0.08
HLO-6-MKB-3 C	41.53	2619 ± 7	—	—	3.7 ± 0.6	$(2.20 \pm 0.09) \times 10^{-18}$	2.60 ± 0.08

l : sample length; ρ_{geo} : bulk density; ρ_{grain} : grain density; ϕ_{tot} : total porosity; ϕ_{con} : connected porosity; k : permeability; κ_{dry} : thermal conductivity. Quoted uncertainties reflect accuracy of the measurements.

Table 5. Ultrasound velocities and dynamic elastic moduli derived by laboratory measurements for limestone and dolomite samples from Wuppertal (WOH), Hagen Hohemlimburg (HKW), and Hönnetal (HLO). The abbreviations MKY, MKB, and MKR indicate the colored rock types Massenkalk yellow (dolomite), Massenkalk black (limestone), and Massenkalk red (dolomite), respectively.

sample	$v_{P,dry}$ (ms^{-1})	$v_{S,dry}$ (ms^{-1})	$v_{P,wet}$ (ms^{-1})	$\tilde{\nu}_d$ (-)	$\tilde{\nu}_{ud}$ (-)	\tilde{E}_d (GPa)	\tilde{E}_{ud} (GPa)
WOH-4-MKY-3 A	5660 ± 20	2990 ± 200	6420 ± 30	0.31 ± 0.13	0.36 ± 0.09	63 ± 8	65 ± 6
WOH-4-MKY-3 B	5590 ± 20	2850 ± 140	5800 ± 20	0.30 ± 0.10	0.34 ± 0.07	62 ± 6	63 ± 5
WOH-4-MKY-3 C	5790 ± 40	2929 ± 340	6086 ± 40	0.33 ± 0.13	0.35 ± 0.10	61 ± 8	62 ± 7
WOH-4-MKB-1 A	6430 ± 20	3120 ± 170	6470 ± 20	0.34 ± 0.08	0.35 ± 0.08	71 ± 6	71 ± 6
WOH-4-MKB-1 B	6310 ± 20	3030 ± 160	6520 ± 20	0.35 ± 0.08	0.36 ± 0.07	67 ± 5	67 ± 5
WOH-4-MKB-1 C	6380 ± 20	2800 ± 140	6480 ± 20	0.38 ± 0.06	0.38 ± 0.05	59 ± 3	59 ± 3
HKW-4-MKR-1 A	4050 ± 30	1740 ± 150	5580 ± 50	0.39 ± 0.09	0.45 ± 0.05	21 ± 2	22 ± 1
HKW-4-MKR-1 B	2970 ± 10	1350 ± 60	4330 ± 20	0.37 ± 0.06	0.44 ± 0.03	12 ± 1	13 ± 1
HKW-4-MKR-1 C	4050 ± 20	2230 ± 180	6050 ± 40	0.28 ± 0.18	0.42 ± 0.07	26 ± 5	29 ± 2
HKW-4-MKY-2 A	4530 ± 20	2460 ± 220	5430 ± 30	0.29 ± 0.19	0.37 ± 0.10	37 ± 7	40 ± 5
HKW-4-MKY-2 B	4810 ± 30	2570 ± 280	5210 ± 40	0.30 ± 0.21	0.34 ± 0.17	41 ± 9	43 ± 7
HKW-5-MKB-1 A	6450 ± 20	3320 ± 190	6560 ± 20	0.32 ± 0.10	0.33 ± 0.09	78 ± 8	78 ± 8
HKW-5-MKB-1 B	6190 ± 20	3380 ± 220	6350 ± 20	0.29 ± 0.14	0.30 ± 0.12	78 ± 11	79 ± 10
HKW-5-MKB-1 C	6410 ± 20	2770 ± 140	7120 ± 30	0.39 ± 0.06	0.41 ± 0.05	57 ± 3	58 ± 3
HKW-2-MKB-2-S2	5125 ± 13	2150 ± 71	5600 ± 15	0.39 ± 0.03	0.42 ± 0.03	32 ± 1	33 ± 1
HLO-6-MKY-1 A	5027 ± 14	2540 ± 115	6440 ± 20	0.33 ± 0.07	0.41 ± 0.04	43 ± 3	46 ± 2
HLO-6-MKY-1 B	5183 ± 20	2530 ± 160	6200 ± 30	0.34 ± 0.10	0.40 ± 0.06	45 ± 5	47 ± 3
HLO-6-MKY-1 C	3628 ± 10	2419 ± 140	5930 ± 30	0.10 ± 0.27	0.40 ± 0.06	34 ± 9	43 ± 2
HLO-6-MKB-3 A	6255 ± 20	3120 ± 170	6450 ± 20	0.34 ± 0.09	0.35 ± 0.08	74 ± 6	74 ± 6
HLO-6-MKB-3 B	5822 ± 32	3210 ± 300	6200 ± 40	0.28 ± 0.21	0.31 ± 0.17	70 ± 15	72 ± 13
HLO-6-MKB-3 C	5849 ± 40	3500 ± 400	6290 ± 40	0.22 ± 0.35	0.28 ± 0.27	78 ± 28	82 ± 23

$v_{P,dry}$, $v_{P,wet}$: P-wave velocity of dry and wet samples; $v_{S,dry}$: S-wave velocity of dry samples; $\tilde{\nu}_d$: dynamic drained Poisson's ratio; $\tilde{\nu}_{ud}$: dynamic undrained Poisson's ratio; \tilde{E}_d : dynamic drained Young's modulus; \tilde{E}_{ud} : dynamic undrained Young's modulus. Quoted uncertainties reflect accuracy of the measurements.

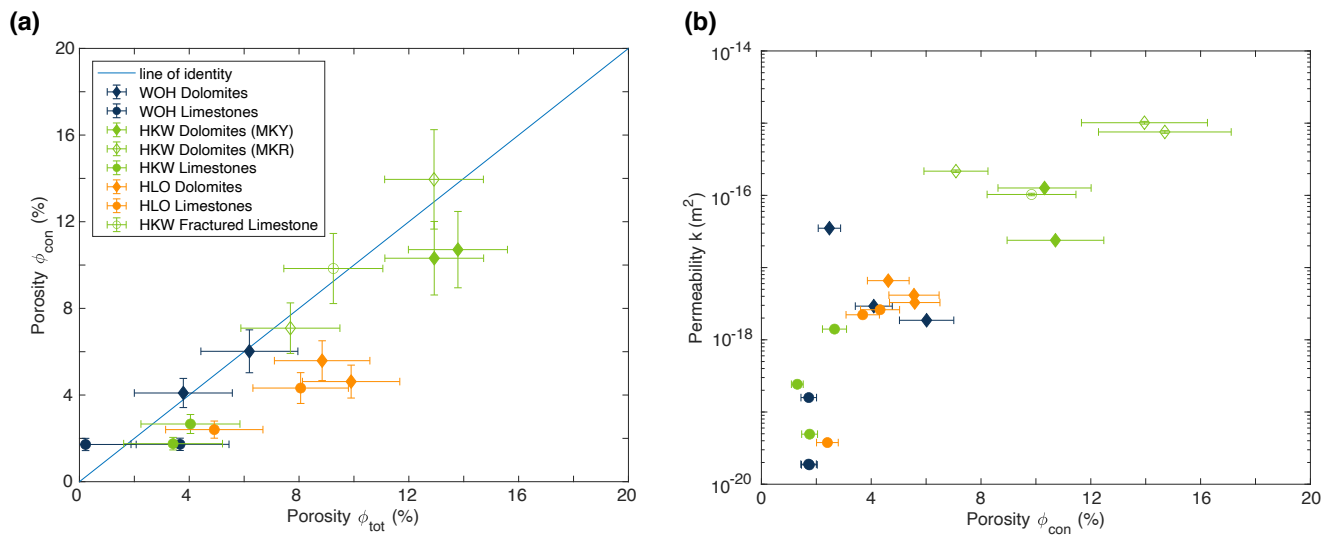


Figure 8. Correlation between (a) permeability and connected porosity and correlation between (b) connected and total porosity. Filling and coloring of markers indicate sample and outcrop, respectively. Measurement uncertainties are indicated by error bars. Where error bars do not exceed marker size, uncertainties appear to be small. The blue line in (b) indicates identity, that is, connected is equal to total porosity.

Table 6. Overview of the 2D fracture connectivity results.

outcrop	θ ($^{\circ}$)			d (m^{-1})			L (m)			P (-)
	set 1	set 2	set 3	set 1	set 2	set 3	set 1	set 2	set 3	
Wuppertal	172	55	105	2.72	2.13	2.07	7.01	4.06	11.43	21.42
Hagen Hohenlimburg	135	12	75	1.76	1.25	1.73	1.24	0.96	1.46	2.49
Hönnetal	176	65	87	2.23	0.38	1.31	4.51	5.57	2.85	3.71

θ : fracture strike azimuth; d : fracture density; L : mean discontinuity length; P : 2D fracture connectivity.

Acknowledgements. We thank all students and researchers involved in field and laboratory measurements, in particular Mathias Nehler. MB, BA, and EHS acknowledge generous funding by the Federal Ministry of Education and Research for the project 3D-RuhrMarie ("FHprofUnt2016"). KL thanks the "Ministerium für Innovation, Wissenschaft und Forschung des Landes Nordrhein-Westfalen" for funding of the project GREENER ("FH ZEIT für FORSCHUNG"). We especially thank the Geological Survey of North Rhine-Westphalia for providing maps and other information, as well as John Hooker, Sadegh Karimpouli, and Randolph T. Williams for fruitful discussions and helpful comments on the earlier draft of the manuscript.

Financial support. This research has been funded by the 3D-RuhrMarie project ("FHprofUnt2016"), the ComLabgo project ("FH ZEIT für FORSCHUNG"), and the GREENER project ("FH ZEIT für FORSCHUNG").

Competing interests. The authors declare that they have no conflict of interest.

Data availability. The measured values and results recorded within the study are available on reasonable request from the corresponding author.

Author contributions. Four authors have contributed to this paper. MB was the lead author and carried out the field investigations, laboratory measurements, and analytical calculations. BA helped with the laboratory measurements on transport and elastic properties. KL was involved in the field investigations. EHS provided helpful background knowledge. MB and BA were involved in the data interpretation and writing of the manuscript.

References

- AGFW: Arbeitsgemeinschaft für Wärme und Heizkraftwirtschaft: Technisches Handbuch Fernwärme, Technik und Normung, AGFW-Projektges. für Rationalisierung, Information und Standardisierung, 2009.
- 575 Agosta, F., Alessandrini, M., Antonellini, M., Tondi, E., and Giorgioni, M.: From fractures to flow: A field-based quantitative analysis of an outcropping carbonate reservoir, *Tectonophysics*, 490, 197–213, <https://doi.org/10.1016/j.tecto.2010.05.005>, 2010.
- Ahrens, B., Duda, M., and Renner, J.: Relations between hydraulic properties and ultrasonic velocities during brittle failure of a low-porosity sandstone in laboratory experiments, *Geophys. J. Int.*, 212, 627–645, <https://doi.org/10.1093/gji/ggx419>, 2018.
- 580 Araújo, K.: The emerging field of energy transitions: progress, challenges, and opportunities, *Energy Res. Soc. Sci.*, 1, 112–121, <https://doi.org/10.1016/j.erss.2014.03.002>, 2014.
- Attewell, P. B. and Farmer, I. W.: *Principles of Engineering Geology*, Springer Science & Business Media, London, 1976.
- Baecher, G. B. and Christian, J. T.: *Reliability and statistics in geotechnical engineering*, John Wiley & Sons, Chichester, 2005.
- Basse, M., Koch, L., and Lemke, U.: *Torleyiscutellum herwigorum* n. gen., n. sp. (Trilobita) from the Upper Honsel Beds of the north-
585 western Sauerland (Lower Givetian, Rhenohercynian Zone), with a contribution to scutellid systematic, *Neues Jahrb. Geol. Paläontol.*, 281, 51–93, <https://doi.org/10.1127/njgpa/2016/0587>, 2016.
- Becker, R., Aboussalam, Z., Stichling, S., and May, A.: The Givetian-Frasnian Hönne Valley Reef Complex (northern Sauerland) – an outline of stratigraphy and facies development, *Münster. Forsch. Geol. Paläont.*, 108, 126–140, 2016.
- Böhm, F., Koch, R., Höferle, R., and Baasch, R.: Der Malm in der Geothermiebohrung Pullach Th2 - Faziesanalyse aus Spülproben
590 (München, S-Deutschland), *Geol. Bl. NO-Bayern*, 60, 17–49, 2010.
- Bonnet, E., Bour, O., Odling, N. E., Davy, P., Main, I., Cowie, P., and Berkowitz, B.: Scaling of fracture systems in geological media, *Rev. Geophys.*, 39, 347–383, <https://doi.org/10.1029/1999RG000074>, 2001.
- Brix, M. R., Drozdowski, G., Greiling, R. O., Wolf, R., and Wrede, V.: The N Variscan margin of the Ruhr coal district (Western Germany): structural style of a buried thrust front?, *Geol. Rundsch.*, 77, 115–126, <https://doi.org/10.1007/BF01848679>, 1988.
- 595 Brudy, M., Zoback, M. D., Fuchs, K., Rummel, F., and Baumgärtner, J.: Estimation of the complete stress tensor to 8 km depth in the KTB scientific drill holes: Implications for crustal strength, *J. Geophys. Res. - Sol. Ea.*, 102, 18 453–18 475, <https://doi.org/10.1029/96JB02942>, 1997.
- Cappa, F., Guglielmi, Y., Fénart, P., Merrien-Soukatchoff, V., and Thoraval, A.: Hydromechanical interactions in a fractured carbonate reservoir inferred from hydraulic and mechanical measurements, *Int. J. Rock Mech. Min.*, 42, 287–306,
600 <https://doi.org/10.1016/j.ijrmms.2004.11.006>, 2005.
- Čermák, V. and Rybach, L.: Thermal conductivity and specific heat of minerals and rocks, in: *Landolt-Börnstein: Numerical Data and Functional Relationships in Science and Technology, New Series, Group V (Geophysics and Space Research), Volume Ia (Physical Properties of Rocks)*, edited by Angenheister, G., pp. 305–343, Springer, Berlin-Heidelberg, 1982.
- Clauser, C. and Huenges, E.: Thermal Conductivity of Rocks and Minerals, in: *Rock Physics & Phase Relations*, edited by Ahrens, T. J., pp.
605 105–126, American Geophysical Union (AGU), <https://doi.org/10.1029/RF003p0105>, 2013.
- Cruden, D.: Describing the size of discontinuities, *Int. J. Rock Mech. Min.*, 14, 133–137, [https://doi.org/10.1016/0148-9062\(77\)90004-3](https://doi.org/10.1016/0148-9062(77)90004-3), 1977.
- Dahi Taleghani, A. and Olson, J. E.: How natural fractures could affect hydraulic-fracture geometry, *SPE Journal*, 19, 161–171, <https://doi.org/10.2118/167608-PA>, 2013.

- 610 Dallmeyer, R. D., Franke, W., and Weber, K.: Pre-Permian geology of central and eastern Europe, Springer Science & Business Media, Berlin, Heidelberg, 2013.
- Darcy, H. P. G.: Les Fontaines publiques de la ville de Dijon. Exposition et application des principes à suivre et des formules à employer dans les questions de distribution d'eau, etc, V. Dalmont, Paris, 1856.
- DEKORP Research Group: Results of deep-seismic reflection investigations in the Rhenish Massif, *Tectonophysics*, 173, 507–515, 615 [https://doi.org/10.1016/0040-1951\(90\)90242-Z](https://doi.org/10.1016/0040-1951(90)90242-Z), 1990.
- Der Kiureghian, A. and Ditlevsen, O.: Aleatory or epistemic? Does it matter?, *Struct. Saf.*, 31, 105–112, <https://doi.org/10.1016/j.strusafe.2008.06.020>, 2009.
- DIN 18124: Determination of density of solid particles – Capillary pycnometer, wide mouth pycnometer, gas pycnometer, 2011.
- Drozdewski, G.: Beiträge zur Tiefentektonik westdeutscher Steinkohlenlagerstätten, *Geolog. Landesamt Nordrhein-Westfalen, Krefeld*, 620 1985.
- Drozdewski, G. and Wrede, V.: Faltung und Bruchtektonik – Analyse der Tektonik im Subvariscikum, *Fortschritte in der Geologie von Rheinland und Westfalen*, 38, 7–187, 1994.
- Drozdewski, G., Grabert, H., Hartkop-Fröder, C., Jansen, F., Juch, D., Pieper, B., Schlimm, W., Stehn, O., Steuerwald, K., Suchan, K.-H., Thome, K., and Vogler, H.: Erläuterungen zur Geologischen Karte von Nordrhein-Westfalen 1:100 000, Blatt C 4706 Düsseldorf - Essen, 625 *Geolog. Landesamt Nordrhein-Westfalen, Krefeld*, 2007.
- Duda, M. and Renner, J.: The weakening effect of water on the brittle failure strength of sandstone, *Geophys. J. Int.*, 192, 1091–1108, <https://doi.org/10.1093/gji/ggs090>, 2013.
- Engel, W., Franke, W., and Langenstrassen, F.: Palaeozoic sedimentation in the northern branch of the mid-European Variscides — Essay of an interpretation, in: *Intracontinental fold belts*, pp. 9–41, Springer, Berlin, Heidelberg, https://doi.org/10.1007/978-3-642-69124-9_2, 630 1983.
- Evans, J. P., Forster, C. B., and Goddard, J. V.: Permeability of fault-related rocks, and implications for hydraulic structure of fault zones, *J. Struct. Geol.*, 19, 1393–1404, [https://doi.org/10.1016/S0191-8141\(97\)00057-6](https://doi.org/10.1016/S0191-8141(97)00057-6), 1997.
- Flügel, E. and Hötzl, H.: Palökologische und statistische Untersuchungen in mitteldevonischen Schelf-Kalken (Schwelmer Kalk, Givet; Rheinisches Schiefergebirge), *Bayerische Akad. Wiss., München*, 1976.
- 635 Franke, W. and Engel, W.: Variscan sedimentary basins on the Continent, and relations with south-west England, *Proc. Ussher.*, 5, 259–269, 1982.
- Franke, W., Bortfeld, R. K., Brix, M., Drozdewski, G., Dürbaum, H. J., Giese, P., Janoth, W., Jödicke, H., Reichert, C., Scherp, A., Schmoll, J., Thomas, R., Thünker, M., Weber, K., Wiesner, M. G., and Wong, H. K.: Crustal structure of the Rhenish Massif: results of deep seismic reflection lines Dekorp 2-North and 2-North-Q, *Geol. Rundsch.*, 79, 523–566, <https://doi.org/10.1007/BF01879201>, 1990.
- 640 Franke, W., Cocks, L. R. M., and Torsvik, T. H.: The Palaeozoic Variscan oceans revisited, *Gondwana Res.*, 48, 257–284, <https://doi.org/10.1016/j.gr.2017.03.005>, 2017.
- Fridleifsson, I. B., Bertani, R., Huenges, E., Lund, J. W., Ragnarsson, A., and Rybach, L.: The possible role and contribution of geothermal energy to the mitigation of climate change, in: *IPCC scoping meeting on renewable energy sources, proceedings*, Luebeck, Germany, vol. 20, pp. 59–80, Citeseer, <https://doi.org/20.500.11850/13474>, 2008.
- 645 Fritzer, T., Settles, E., and Dorsch, K.: Bayerischer Geothermieatlas – Hydrothermale Energiegewinnung, Bayerisches Staatsministerium für Wirtschaft, Infrastruktur, Verkehr und Technologie, Munich, Germany (in German), 2010.
- Ganoulis, J.: *Engineering risk analysis of water pollution: probabilities and fuzzy sets*, John Wiley & Sons, Weinheim, 2008.

- Gassmann, F.: Über die Elastizität poröser Medien: Vier. der Natur, Gesellschaft Zürich, 96, 1–23, 1951.
- Gebrande, H.: 3.1.3 Elastic wave velocities and constants of elasticity of rocks at room temperature and pressures < 1 GPa: Datasheet from
650 Landolt-Börnstein - Group V Geophysics · Volume 1B, in: Subvolume B, edited by Angenheister, G., pp. 35–38, Springer-Verlag Berlin Heidelberg, https://doi.org/10.1007/10201909_7, 1982.
- Gillhaus, A., GÖtte, T., and Richter, D. K.: Polyphase spätdiagenetische Dolomitbildung im mittel-bis oberdevonischen Massenkalk von Hagen-Hohenlimburg (Remscheid-Altenaer Sattel, Rheinisches Schiefergebirge), *Mitt. Ges. Geol. Bergbaustud. Österr.*, 46, 51–66, 2003.
- Goldstein, B., Hiriart, G., Tester, J., Bertani, B., Bromley, R., Gutierrez-Negrin, L., Huenges, E., Ragnarsson, A., Mongillo, A., Muraoka, H.,
655 and Zui, V. I.: Great expectations for geothermal energy to 2100, in: *Proceedings 36th Workshop on Geothermal Reservoir Engineering*, 2011.
- Grabert, H.: *Abriß der Geologie von Nordrhein-Westfalen*, Schweizerbart'sche Verlagsbuchhandlung, Stuttgart, 1998.
- Guerrero, V., Mazzoli, S., Iannace, A., Vitale, S., Carravetta, A., and Strauss, C.: A permeability model for naturally fractured carbonate reservoirs, *Mar. Petrol. Geol.*, 40, 115–134, <https://doi.org/10.1016/j.marpetgeo.2012.11.002>, 2013.
- 660 Hancock, P. L. and Bevan, T. G.: Brittle modes of foreland extension, *Geol. Soc. Spec. Publ.*, 28, 127–137, <https://doi.org/10.1144/GSL.SP.1987.028.01.10>, 1987.
- Hashin, Z. and Shtrikman, S.: A variational approach to the theory of the elastic behaviour of multiphase materials, *J. Mech. Phys. Solids*, 11, 127–140, [https://doi.org/10.1016/0022-5096\(63\)90060-7](https://doi.org/10.1016/0022-5096(63)90060-7), 1963.
- Heidbach, O., Rajabi, M., Reiter, K., Ziegler, M., et al.: World stress map database release 2016, GFZ Data Services,
665 <https://doi.org/10.5880/WSM.2016.002>, 2016.
- Hesemann, J.: *Die Ergebnisse der Bohrung Münsterland 1*, Springer Fachmedien Wiesbaden, 1965.
- Hirschberg, S., Wiemer, S., and Burgherr, P.: *Energy from the Earth. Deep Geothermal as Resource for the Future?*, vdf Hochschulverlag AG, Zurich, Switzerland, 2015.
- Hoek, E. and Brown, E.: Practical estimates of rock mass strength, *Int. J. Rock Mech. Min.*, 34, 1165–1186, [https://doi.org/10.1016/S1365-6701609\(97\)80069-X](https://doi.org/10.1016/S1365-6701609(97)80069-X), 1997.
- 670 Holder, M. T. and Leversidge, B. E.: A model for the tectonic evolution of south Cornwall, *J. Geol. Soc. London*, 143, 125–134, <https://doi.org/10.1144/gsjgs.143.1.0125>, 1986.
- Homuth, S.: *Aufschlussanalogstudie zur Charakterisierung oberjurassischer geothermischer Karbonatreservoirs im Molassebecken*, Dissertation, Technische Universität Darmstadt, 2014.
- 675 Homuth, S., Götz, A. E., and Sass, I.: Reservoir characterization of the Upper Jurassic geothermal target formations (Molasse Basin, Germany): role of thermofacies as exploration tool, *Geoth. Energ. Sci.*, 3, 41–49, <https://doi.org/10.5194/gtes-3-41-2015>, 2015a.
- Homuth, S., Götz, A., and Sass, I.: *Physical Properties of the Geothermal Carbonate Reservoirs of the Molasse Basin, Germany - Outcrop Analogue vs. Reservoir Data*, 2015b.
- Hudson, J. A.: *Engineering Properties of Rocks*, Elsevier, 2005.
- 680 ISRM: International society for rock mechanics commission on standardization of laboratory and field tests: Suggested methods for the quantitative description of discontinuities in rock masses, *Int. J. Rock Mech. Min.*, 15, 319–368, [https://doi.org/10.1016/0148-9062\(78\)91472-9](https://doi.org/10.1016/0148-9062(78)91472-9), 1978.
- Jansen, F., von Kamp, H., Kühn-Velten, H., Kunz, E., Müller, H., Paproth, E., Rabitz, A., Thome, K., and Vogler, H.: *Erläuterung zur Geologische Karte von Nordrhein-Westfalen 1: 100 000, Blatt C 4710 Dortmund*, Geolog. Landesamt Nordrhein-Westfalen, Krefeld,
685 1986.

- Jorand, R., Clauser, C., Marquart, G., and Pechinig, R.: Statistically reliable petrophysical properties of potential reservoir rocks for geothermal energy use and their relation to lithostratigraphy and rock composition: The NE Rhenish Massif and the Lower Rhine Embayment (Germany), *Geothermics*, 53, 413–428, <https://doi.org/10.1016/j.geothermics.2014.08.008>, 2015.
- Jux, U.: Die devonischen Riffe im rheinischen Schiefergebirge, Teile I und II, vol. 110, N. Jb. Geol. u. Paläont., Stuttgart, 1960.
- 690 Kelley, V. C. and Clinton, N. J.: Fracture systems and tectonic elements of the Colorado Plateau, 6-7, University of New Mexico Press, 1960.
- Klaus, T., Vollmer, C., Werner, K., Lehmann, H., and Müschen, K.: Energieziel 2050: 100% Strom aus erneuerbaren Quellen, Dessau: Umweltbundesamt, 2010.
- Kley, J.: Saxonische Tektonik im 21. Jahrhundert, *Z. Dtsch. Ges. Geowiss.*, 164, 295–311, <https://doi.org/10.1127/1860-1804/2013/0022>, 2013.
- 695 Kloke, R.: Geologische Kartierung des Steinbruchgebietes Asbeck, Hönnetal (NRW), Dissertation, Ruhr-Universität Bochum, 2007.
- Knutzen, L. K.: Geothermal and spatial coupled site selection for the connection of deep geothermal plants to existing district heating networks on the example of the Ruhr Metropolitan Region, Dissertation, Ruhr-Universität Bochum, 2017.
- Koch-Früchtel, U. and Früchtel, M.: Stratigraphie und Faziesanalyse einer mitteldevonischen arbonatabfolge im Remscheid-Altenaer Sattel (Sauerland), *Geol. Paläont. Westf.*, 26, 47–75, 1993.
- 700 Kosmat, F.: Gliederung des varistischen Gebirgsbaues, *Abh. Sächisches Geol. Landesamtes*, 1, 1–39, 1927.
- Kranz, R. L., Frankel, A. D., Engelder, T., and Scholz, C. H.: The permeability of whole and jointed Barre Granite, *Int. J. Rock. Mech. Min.*, 16, 225–234, [https://doi.org/10.1016/0148-9062\(79\)91197-5](https://doi.org/10.1016/0148-9062(79)91197-5), 1979.
- Krebs, W.: Devonian Carbonate Complexes of Central Europe, *AAPG Bull.*, 54, 856–857, <https://doi.org/10.1306/5D25CAE9-16C1-11D7-8645000102C1865D>, 1970.
- 705 La Pointe, P. R. and Hudson, J. A.: Characterization and interpretation of rock mass joint patterns, Geological Society of America, Wisconsin, 1985.
- Lacazette, A.: A new stereographic technique for the reduction of scanline survey data of geologic fractures, *Comput. Geosci.*, 17, 445–463, [https://doi.org/10.1016/0098-3004\(91\)90051-E](https://doi.org/10.1016/0098-3004(91)90051-E), 1991.
- Laubach, S. E., Olson, J. E., and Gale, J. F. W.: Are open fractures necessarily aligned with maximum horizontal stress?, *Earth Planet. Sc. Lett.*, 222, 191–195, 2004.
- 710 Löer, K., Riahi, N., and Saenger, E. H.: Three-component ambient noise beamforming in the Parkfield area, *Geophysical J. Int.*, 213, 1478–1491, <https://doi.org/10.1093/gji/ggy058>, 2018.
- Lorenz, J. C., Teufel, L. W., and Warpinski, N. R.: Regional Fractures I: A Mechanism for the Formation of Regional Fractures at Depth in Flat-Lying Reservoirs1, *AAPG Bull.*, 75, 1714–1737, <https://doi.org/10.1306/0C9B29E3-1710-11D7-8645000102C1865D>, 1991.
- 715 Lucia, J. F., Charles, K., and James, J.: Carbonate Reservoir Characterization, vol. 2, Springer, Berlin, Heidelberg, <https://doi.org/10.1007/978-3-540-72742-2>, 2007.
- Markovaara-Koivisto, M. and Laine, E.: MATLAB script for analyzing and visualizing scanline data, *Comput. Geosci.*, 40, 185–193, <https://doi.org/10.1016/j.cageo.2011.07.010>, 2012.
- Martin, G. S., Wiley, R., and Marfurt, K. J.: Marmousi2: An elastic upgrade for Marmousi, *Lead. Edge*, 25, 156–166, <https://doi.org/10.1190/1.2172306>, 2006.
- 720 MATLAB: version 9.4.0. (R2018a), The MathWorks Inc., Natick, Massachusetts, 2018.
- Mavko, G., Mukerji, T., and Dvorkin, J.: The Rock Physics Handbook, Cambridge University Press, Cambridge, 3 edn., <https://doi.org/10.1017/CBO9780511626753>, 2020.

- Meschede, M.: Deutschland im späten Paläozoikum, in: *Geologie Deutschlands*, pp. 61–101, Springer, Berlin, Heidelberg, 2 edn.,
725 <https://doi.org/10.1007/978-3-662-56422-6>, 2018.
- Michie, E.: Influence of host lithofacies on fault rock variation in carbonate fault zones: A case study from the Island of Malta, *J. Struct. Geol.*, 76, 61–79, 2015.
- Narr, W.: Fracture Density in the Deep Subsurface: Techniques with Application to Point Arguello Oil Field, *AAPG Bull.*, 75, 1300–1323,
<https://doi.org/10.1306/0C9B2939-1710-11D7-8645000102C1865D>, 1991.
- 730 Narr, W.: Estimating Average Fracture Spacing in Subsurface Rock, *AAPG Bull.*, 80, 1565–1585, <https://doi.org/10.1306/64EDA0B4-1724-11D7-8645000102C1865D>, 1996.
- Nelson, R.: *Geologic analysis of naturally fractured reservoirs*, Elsevier, 2001.
- Nelson, R. A. and Handin, J.: Experimental study of fracture permeability in porous rock, *AAPG Bull.*, 61, 227–236,
<https://doi.org/10.1306/C1EA3C2B-16C9-11D7-8645000102C1865D>, 1977.
- 735 Nickelsen, R. P. and Hough, V. N. D.: Jointing in the Appalachian Plateau of Pennsylvania, *AAPG Bull.*, 78, 609–630,
[https://doi.org/10.1130/0016-7606\(1967\)78\[609:JITAPO\]2.0.CO;2](https://doi.org/10.1130/0016-7606(1967)78[609:JITAPO]2.0.CO;2), 1967.
- Odling, N. E., Gillespie, P., Bourguin, B., Castaing, C., Chiles, J. P., Christensen, N. P., Fillion, E., Genter, A., Olsen, C., Thrane, L., Trice, R., Aarseth, E., Walsh, J. J., and Watterson, J.: Variations in fracture system geometry and their implications for fluid flow in fractures hydrocarbon reservoirs, *Petrol. Geosci.*, 5, 373–384, <https://doi.org/10.1144/petgeo.5.4.373>, 1999.
- 740 Oncken, O.: Transformation of a magmatic arc and an orogenic root during oblique collision and its consequences for the evolution of the European Variscides (Mid-German Crystalline Rise), *Geol. Rundsch.*, 86, 2–20, <https://doi.org/10.1007/s005310050118>, 1997.
- Ozkaya, S. I.: A Simple Formula To Estimate 2D Fracture Connectivity, *SPE Reservoir Evaluation & Engineering*, 14, 763–775, 2011.
- Paeckelmann, W.: *Erläuterungen zur Geologische Karte von Preußen und benachbarten deutschen Ländern*, Blatt Balve, Geolog. Landesamt Nordrhein-Westfalen, Krefeld, 1938.
- 745 Paeckelmann, W.: *Erläuterungen zur Geologischen Karte von Nordrhein-Westfalen 1:25000*, Blatt 4708 Wuppertal-Elberfeld, Geolog. Landesamt Nordrhein-Westfalen, Krefeld, 1979.
- Pas, D., Da Silva, A.-C., Cornet, P., Bultynck, P., Königshof, P., and Boulvain, F.: Sedimentary development of a continuous Middle Devonian to Mississippian section from the fore-reef fringe of the Brilon Reef Complex (Rheinisches Schiefergebirge, Germany), *Facies*, 59, 969–990, <https://doi.org/10.1007/s10347-012-0351-z>, 2013.
- 750 Popov, Y. A.: Optical scanning technology for nondestructive contactless measurements of thermal conductivity and diffusivity of solid matters, *Exp. Heat Transfer, Fluid Mech. Thermodyn.*, 1, 109–117, 1997.
- Priest, S. D.: *Discontinuity Analysis for Rock Engineering*, Springer Science & Business Media, London; New York,
<https://doi.org/10.1007/978-94-011-1498-1>, 1995.
- Priest, S. D. and Hudson, J. A.: Discontinuity spacings in rock, *Int. J. Rock. Mech. Min.*, 13, 135–148, [https://doi.org/10.1016/0148-9062\(76\)90818-4](https://doi.org/10.1016/0148-9062(76)90818-4), 1976.
- 755 Priest, S. D. and Hudson, J. A.: Estimation of discontinuity spacing and trace length using scanline surveys, *Int. J. Rock Mech. Min.*, 18, 183–197, [https://doi.org/10.1016/0148-9062\(81\)90973-6](https://doi.org/10.1016/0148-9062(81)90973-6), 1981.
- Roberts, J. C.: Jointing and minor tectonics of the Vale of Glamorgan between Ogmore-By-Sea and Lavernock Point, South Wales, *Geol. J.*, 9, 97–114, <https://doi.org/10.1002/gj.3350090201>, 1974.
- 760 Rummel, F. and Weber, U.: Stress field in the coal mines of the Ruhr coal district, in: *The 34th US Symposium on Rock Mechanics (USRMS)*, ARMA, 1993.

- Salamon, M. and Königshof, P.: Middle Devonian olistostromes in the Rheno-Hercynian zone (Rheinisches Schiefergebirge) – An indication of back arc rifting on the southern shelf of Laurussia, *Gondwana Res.*, 17, 281–291, <https://doi.org/10.1016/j.gr.2009.10.004>, 2010.
- 765 Santos, R. F. V. C., Miranda, T. S., Barbosa, J. A., Gomes, I. F., Matos, G. C., Gale, J. F. W., Neumann, V. H. L. M., and Guimarães, L. J. N.: Characterization of natural fracture systems: Analysis of uncertainty effects in linear scanline results, *AAPG Bull.*, 99, 2203–2219, <https://doi.org/10.1306/05211514104>, 2015.
- Scheer, D., Konrad, W., and Scheel, O.: Public evaluation of electricity technologies and future low-carbon portfolios in Germany and the USA, *Energ. Sustain. Soc.*, 3, 8, <https://doi.org/10.1186/2192-0567-3-8>, 2013.
- 770 Schellschmidt, R., Sanner, B., Pester, S., and Schulz, R.: Geothermal energy use in Germany, in: *Proceedings World Geothermal Congress*, vol. 152, p. 19, 2010.
- Schudack, M.: Karbonatzyklen in Riff- und Lagunenbereichen des devonischen Massenkalkkomplexes von Asbeck (Hönnetal, Rheinisches Schiefergebirge), *Geol. Paläont. Westf.*, 26, 77–106, 1993.
- Stearns, D. W. and Friedman, M.: Stratigraphic Oil and Gas Fields – Classification, Exploration Methods, and Case Histories, in: *Reservoirs in Fractured Rock*, American Association of Petroleum Geologists, <https://doi.org/10.1306/M16371C8>, 1972.
- 775 Stober, I.: Hydrochemical properties of deep carbonate aquifers in the SW German Molasse basin, *Geothermal Energy*, 2, 13, <https://doi.org/10.1186/s40517-014-0013-1>, 2014.
- Terzaghi, R. D.: Sources of Error in Joint Surveys, *Geotechnique*, 15, 287–304, <https://doi.org/10.1680/geot.1965.15.3.287>, 1965.
- van Golf-Racht, T. D.: *Fundamentals of fractured reservoir engineering*, Elsevier, 1982.
- von Kamp, H. and Ribbert, K. H.: *Erläuterungen zur Geologischen Karte von Nordrhein-Westfalen 1:25000, Blatt 4611 Hagen-Hohenlimburg*, Geolog. Landesamt Nordrhein-Westfalen, Krefeld, 2005.
- 780 Wagner, W.: FLUIDCAL, software for calculation of thermodynamic properties for a great number of substances, F.I.R.S.T. – Gesellschaft für technisch-wissenschaftliche Softwareanwendungen mbH, Wermelskirchen, 2009.
- Watkins, H., Bond, C. E., Healy, D., and Butler, R. W.: Appraisal of fracture sampling methods and a new workflow to characterise heterogeneous fracture networks at outcrop, *J. Struct. Geol.*, 72, 67–82, 2015.
- 785 Wegener, M., Schwarze, B., Spiekermann, K., Brosch, K., Huber, F., Müller, M., and Reutter, O.: Modelling the great transformation in the Ruhr area, *Transp. Res. Proc.*, 41, 231–239, <https://doi.org/10.1016/j.trpro.2019.09.042>, 2019.
- Wilson, C. E., Aydin, A., Karimi-Fard, M., Durlofsky, L. J., Amir, S., Brodsky, E. E., Kreylos, O., and Kellogg, L. H.: From outcrop to flow simulation: Constructing discrete fracture models from a LIDAR survey, *AAPG Bull.*, 95, 1883–1905, <https://doi.org/10.1306/03241108148>, 2011.