

**Factors driving carbon mineralization priming effect**

P. Cely et al.

# Factors driving carbon mineralization priming effect in a soil amended with different types of biochar

P. Cely<sup>1</sup>, A. M. Tarquis<sup>2,3</sup>, J. Paz-Ferreiro<sup>1</sup>, A. Méndez<sup>4</sup>, and G. Gascó<sup>1</sup>

<sup>1</sup>Departamento de Edafología, E.T.S.I. Agrónomos, Universidad Politécnica de Madrid, Ciudad Universitaria, 28004 Madrid, Spain

<sup>2</sup>CEIGRAM, Universidad Politécnica de Madrid, Ciudad Universitaria, 28004 Madrid, Spain

<sup>3</sup>Departamento de Matemática aplicada a la Ingeniería Agronómica, Universidad Politécnica de Madrid, Ciudad Universitaria, 28040 Madrid, Spain

<sup>4</sup>Departamento de Ingeniería de Materiales, E.T.S.I. Minas, Universidad Politécnica de Madrid, C/Ríos Rosas 21, 28003 Madrid, Spain

Received: 1 March 2014 – Accepted: 4 March 2014 – Published: 15 March 2014

Correspondence to: G. Gascó (gabriel.gasco@upm.es)

Published by Copernicus Publications on behalf of the European Geosciences Union.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## Abstract

The effect of biochar on soil carbon mineralization priming effect depends on the characteristics of the raw materials, production method and pyrolysis conditions. The goal of the present study is to evaluate the impact of three different types of biochar on soil CO<sub>2</sub> emissions and in different physicochemical properties. For this purpose, a sandy-loam soil was amended with the three biochars (BI, BII and BIII) at a rate of 8 wt% and soil CO<sub>2</sub> emissions were measured for 45 days. BI is produced from a mixed wood sieving's from wood chip production, BII from a mixture of paper sludge and wheat husks and BIII from sewage sludge. Cumulative CO<sub>2</sub> emissions of biochars, soil and amended soil were well fit to a simple first-order kinetic model with correlation coefficients ( $r^2$ ) greater than 0.97. Results shown a negative priming effect in the soil after addition of BI and a positive priming effect in the case of soil amended with BII and BIII. These results can be related with different biochar properties such as ash content, volatile matter, fixed carbon, organic carbon oxidised with dichromate, soluble carbon and metal and phenolic substances content in addition to surface biochar properties. Three biochars increased the values of soil field capacity and wilting point, while effects over pH and cation exchange capacity were not observed.

## 1 Introduction

Biochar is a carbonaceous material obtained from biomass pyrolysis or gasification process. For many years now, it has been researched as a significant means to improve soil productivity, carbon storage, and filtration of soil's percolating water (Lehmann and Joseph, 2009). Biochar production emits carbon dioxide and other greenhouse gases, but combined with a proper waste disposal or biofuel production it offers a practical way to mitigate global warming (Barrow, 2012).

Nowadays, biochar production is attracting more attention because it is a safer method of organic waste management. Many types of biomass can be transformed

SED

6, 849–868, 2014

## Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



into biochar including wood wastes, crop residues, switch grass, wastewater sludge or deinking sludges (Méndez et al., 2012; Paz-Ferreiro et al., 2014; Sohi et al., 2010). If enough farmers, larger agricultural enterprises, biofuel producers, and waste treatment plants established biochar production methods, it could reduce CO<sub>2</sub> emissions related to agriculture while improving soils productivity.

Biochar is a highly recalcitrant organic material, with a long-term stability in soil, which is in the scale of millennia or longer (Kuzyakov et al., 2014). The response that soil exhibits to biochar addition has global consequences for carbon cycling. Depending on the interaction between soil and biochar the ecosystem could become a sink or source of carbon.

The term priming effect refers to alterations in the mineralization of native organic matter due to the addition of substrates and has been observed in many studies, both in the field and under laboratory conditions (Paz-Ferreiro et al., 2012; Zavalloni et al., 2009; Zimmerman et al., 2011). While it is generally regarded that biochar addition results in a reduction in soil carbon emissions from the soil, the fact is that the results are biochar and soil specific. Indeed, previous works have shown that there is not a clear trend on CO<sub>2</sub> emissions after biochar application. For example, Zimmerman et al. (2011) found that the soil application of biochars produced at temperatures between 500–600 °C had a negative priming effect due to the formation of stable aggregates and to the toxicity of biochar to soil microorganisms. Jones et al. (2011) hypothesized that the increment in soil respiration is due to different mechanism as changes in soil physical properties (bulk density, porosity, moisture); biological breakdown of organic carbon released from the biochar; abiotic release of inorganic carbon contained in the biochar and a stimulation of decomposition of soil organic matter. Zavalloni et al. (2011) have showed that the amount of soil carbon respired was similar between the control and soil treated with biochar from coppiced woodlands pyrolysis in a short term incubation experiment. Also, Wardle et al. (2008) reported priming effect from a boreal soil after biochar addition, although the results of this experiment have been disputed by others (Lehmann and Sohi, 2008). If a strong priming effect occurs

## Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



after biochar addition to the soil, then the beneficial effects attained by biochar addition to the soil becomes mitigated. Furthermore, although the use of biochar measuring soil respiration has been evaluated (Méndez et al., 2012; Zimmerman et al., 2011) fewer studies have studied the role of biochar addition of native soil organic matter (Zimmermann et al., 2011; Cross and Sohi, 2011; Gascó et al., 2012). For example, Gascó et al. (2012) observed using thermal methods that there is a degradation of more complex structures after application of a sewage sludge biochar to a Haplic Cambisol. The final chemical composition and physical properties of biochar, and thus, its potential for having a positive or negative priming effect depends on the characteristics of the raw materials, production method and pyrolysis conditions. Different studies has been performed in order to study the influence of feedstock, production method and pyrolysis temperature on biochar properties and uses (Calvelo Pereira et al., 2011; Méndez et al., 2012; Zimmermann et al., 2011; Paz-Ferreiro et al., 2014).

In the present work, three different biochars were used in order to study their influence on soil properties and CO<sub>2</sub> emissions. Three biochars were obtained from pyrolysis of different types of biomass: mixed wood sieving's from wood chip production, paper sludge and wheat husks and sewage sludge at temperatures between 500 and 620 °C using slow pyrolysis processes.

## 2 Materials and methods

### 2.1 Soil selection and characterization

The selected soil was taken from the north-east of Toledo (Spain) and the soil was air-dried, crushed and sieved through a 2 mm mesh prior to analyses. The initial pH and electrical conductivity (EC) were determined with a soil : water ratio of 1 : 2.5 (gmL<sup>-1</sup>) using a Crison micro-pH 2000 (Thomas et al., 1996) in the case of pH and a Crison 222 conductivimeter (Rhoades, 1996) in the case of EC. CEC was determined by NH<sub>4</sub>OAc/HOAc at pH 7.0 (Sumner and Miller, 1996). Total organic matter (TOM)

was determined using the dry combustion method at 540 °C (Nelson and Sommers, 1996). Soil metal content was determined using a Perkin Elmer 2280 atomic absorption spectrophotometer after sample extraction by digestion with concentrated HCl/HNO<sub>3</sub> following method 3051a (USEPA, 1997). Soil texture was determined following the methodology of Bouyoucos (1962).

## 2.2 Biochar characterization

Three different biochar samples were selected and used for the present work: biochar I (BI) was produced by Swiss Biochar (Lausanne; Switzerland) from mixed wood sieving's from wood chip production at 620 °C; biochar II (BII) was produced by Sonnenerde (Austria) from a mixture of paper sludge and wheat husks at 500 °C; and biochar III (BIII) was produced by Pyreg (Germany) from sewage sludge at 600 °C. The pyrolysis duration was 20 min on all cases. All biochar samples were produced using Pyreg500-III pyrolysis (Germany) units which can work until 650 °C in a continuous process.

The pH, EC, CEC and metal content in biochars were performed as in Sect. 2.1. Proximate analysis was determined by thermogravimetry using a Labsys Setaram equipment. The sample was heated to a temperature of 600 °C under N<sub>2</sub> atmosphere and 30 °C min<sup>-1</sup> heating rate. Humidity was calculated as the weight loss from the initial temperature to 150 °C. The volatile matter (VM) was determined as the weight loss from 150 °C to 600 °C under N<sub>2</sub> atmosphere. At this temperature, air atmosphere was introduced and fixed carbon (FC) was calculated as the weight produced when the final sample was burnt. The ashes were determined as the final weight of the samples.

Biochar nitrogen adsorption analysis to determine BET surface area was carried out at 77 K in a Micromeritics Tristar 3000. Also, biochar CO<sub>2</sub> adsorption analysis to determine both CO<sub>2</sub> micropore surface area and monolayer capacity were performed at 273 K in a ASAP 2020 V3.01

Finally, biochar phenolic substances were determined using Folin-Ciocalteu's reagent (Martín-Lara et al., 2009).

SED

6, 849–868, 2014

### Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## 2.3 Treatments and soil respiration

The selected soil (*S*) was amended with the three biochar samples at 8 wt% (*S*+BI, *S*+BII, *S*+BIII) and mixtures were incubated at constant temperature ( $28 \pm 2^\circ\text{C}$ ) and humidity (60% FC) during 45 days. Additionally, it was studied if the application of the different amendments had an additive or synergistic effect in the soil (priming effect); in this way each biochar (BI, BII, BIII) was incubated individually in the same conditions.

Each sample (100 g) was introduced at 1 L airtight jar and the  $\text{CO}_2$  produced during incubation was collected in 50 mL of a 0.3 N NaOH solution, which was then titrated using 0.3 N HCl after the  $\text{BaCl}_2$  precipitation of the carbonates. All treatments were performed by triplicate.

Organic carbon oxidised with dichromate from initial and final biochars were determined by the Walkley–Black method (Nelson and Sommers, 1996).

After incubation time, the next soil properties were determined: pH, EC, CEC, field capacity (FC), wilting point (WP) and available water (AW). pH, EC and CEC were determined as in Sect. 2.1. Field capacity (FC) and wilting point (WP) were determined as the soil moisture content at 33 kPa (FC) and 1500 kPa (WP) (Richards, 1954). Available water (AW) was calculated as the difference between FC and WP.

All analyses were performed by triplicate.

## 2.4 Mineralisation model

The cumulative mineralisation data were fitted to a first-order kinetic model, which is widely used to model soil respiration data (Méndez et al., 2013). The kinetic model used to calculate the evolved  $\text{CO}_2\text{-C}$  soil is described as follows:

$$Y = Ct^m \quad (1)$$

where  $Y$  is the cumulative  $\text{CO}_2\text{-C}$  ( $\text{mg CO}_2\text{-C } 100 \text{ g}^{-1}$  soil),  $t$  is the cumulative time of incubation (d), and  $C$  and  $m$  are the mineralisation constants, with  $C \cdot m$  representing the initial mineralisation rate. The convexity shape of  $Y$  in this model is defined mainly

SED

6, 849–868, 2014

### Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



by  $m$ , with  $m \leq 1$  and  $C \geq 0$ . This equation was fitted to describe the  $C$  mineralisation in  $S$ , the biochars (BI, BII and BIII) and the amended soils ( $S+BI$ ,  $S+BII$  and  $S+BIII$ ). The mineralisation rate parameters of Eq. (1) were estimated by a non-linear-model method, minimising RMSA.

- 5 To quantify the priming effect of the three raw materials, the model was fitted to the experimental data (experiment) and to the respiration data with the addition of 92 g of soil with 8 g of biochars (addition). Also,  $C_{10}$  was calculated as the evolved  $CO_2-C$  after 10 days according the model.

### 3 Results and discussion

- 10 Table 1 shows main properties of the soil and three biochars. Soil texture was sandy loam, it had a slightly alkaline pH, the EC value indicated that soil has no risk of salinisation and soil organic matter content was 6.30 %.

- With respect to biochars, BI and BII showed basic pH whereas BIII had a pH value near 7. Proximate analysis of three biochar samples showed differences in their composition. The ash content of biochars followed the next sequence BIII > BII > BI depending on the feedstock, i.e., BI is prepared from woodchip, BII from paper sludge and wheat husk and BIII from sewage sludge presenting a higher mineral content. Indeed, BIII had the highest EC and metals content. Biochar metal content did not exceed the limit values for concentrations of metals in soil set up by the European Union (European Community, 1986) with BIII presenting the highest content, which can be explained according to its origin. All biochars presented a similar CEC which can be related with the comparable temperature of preparation. Volatile matter content of BI and BII was similar and lower than that of BII. Fixed carbon of BI was significantly higher than that of BII and BIII. Combining VM and FC, the ratio  $FC/(FC+VM)$  could be indicative of the carbon stability. According to this, BI was a very recalcitrant carbon material, whereas BIII showed the lowest ratio.
- 15  
20  
25

## Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 2 shows the changes of pH, EC and CEC after the biochar amendment of soil. Instead, biochar pHs were different (Table 1), pH did not vary after biochar application though BI and BII presented pH 2 units higher than soil. Conversely, other studies have shown pH increments after biochar application (Méndez et al., 2012). So, both biochar and soil composition influences the pH changes. However, the electrical conductivity increased slightly depending on biochar electrical conductivity (Table 1), but the risk of salinisation was negligible at the applied dose (USDA, 1999). The increased in soil EC is very common in soils treated with biochar prepared from sludge, which is the case of BII and BIII, as reported in other studies Hossain et al. (2010) or Méndez et al. (2012). With respect to CEC, biochars did not increase soil CEC, a result according to previous works (Méndez et al., 2012) and which can be related with the low CEC of biochar with respect to soil organic matter (Lehmann, 2007).

Biochars increased the values of soil FC and WP following, respectively, the following sequence  $S < S + BIII < S + BI \approx S + BII$  and  $S < S + BIII < S + BI \approx S + BII$ . Also, there was an increment in the AW when the soil was treated by BI and BII. This improvement of water retention is in accordance with the results of Méndez et al. (2012) which found the same trend in a soil with a similar sand content treated with biochar prepared for sewage sludge at 600 °C. The higher increment of FC, WP and AW in S + BI and S + BII treatments could be related with the higher values of FC and WP of these biochar according to their high surface area and porosity (Table 1).

With respect to biochar CO<sub>2</sub> emissions, these were higher in BI while significant differences between BII and BIII were not found. This fact can be attributed to the elevated FC + VM ratio of BI (FC + VM; 92.13 %) respect to BII (65.15 %) and BIII (26.54 %). In order to explain the similar CO<sub>2</sub> emissions of BII and BIII other factors needs to be account (Jones et al., 2011). Calvelo Pereira et al. (2011) found that dichromate oxidation reflect the degree of biochar carbonization and could therefore be used to estimate the labile fraction of carbon in biochar. Figure 1 shows as BIII with highest ash content and expected lowest CO<sub>2</sub> emissions, has the highest dichromate oxidised carbon and consequently the highest labile carbon content.



## Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Results shown that biochar addition increased CO<sub>2</sub> soil emissions approximately by 25 %, but there were not differences between the different treatments (Fig. 2). Zavalloni et al. (2011) also found that the amount of soil carbon respired was similar between the control and the soil amended with biochar. This matter can be attributed to different factors not only to one. Méndez et al. (2013) found that higher CO<sub>2</sub> emissions can be related with higher content of VM (BII) and lower values of ratio FC/(FC+VM). Also, the CO<sub>2</sub> evolved can be related with the variation of oxidisable organic carbon of biochars (Fig. 1). On the other hand, different authors (Méndez et al., 2013; Thies and Rillig, 2009) observed that the reduction of CO<sub>2</sub> emissions can be attributed to chemisorptions of the respired CO<sub>2</sub> on biochar surface. Indeed, BI had a CO<sub>2</sub> micropore surface area and CO<sub>2</sub> monolayer capacity more than 44 % higher than BI and BII. Finally, the combination of metal and phenolic substances of biochar can have negative effect on soil microbial activity reducing the respired CO<sub>2</sub>. Table 4 summarizes the qualitative influence of different factors on CO<sub>2</sub> emissions.

Table 5 and Fig. 2 show the parameters estimated according to simple first-order kinetic model to describe the *C* mineralization in soil (*S*), biochars (BI, BII, BIII) and amended soils (*S*+ BI, *S*+ BII, *S*+ BIII). The kinetics of CO<sub>2</sub> evolved from biochars was well fit to the proposed model presenting *r*<sup>2</sup> values higher to 0.97. With respect to the amended soils, the fit presented a Root Mean Square Deviation (RSMD) lower than 2 and *r*<sup>2</sup> values higher than 0.99. In fact, this model of simple first-order kinetic model has been successfully used to estimate CO<sub>2</sub> emissions from biochar and biochar amended soil in short term incubation experiment (Méndez et al., 2013).

Also, results shown that the application of BI had a negative priming effect if data of the experiment (57.1 mg C–CO<sub>2</sub>/100 g) and addition (63.0 mg C–CO<sub>2</sub>/100 g) are compared (Table 4) according with the similar values of model parameters (*m* and *C*); this fact probably can be due to the toxic effect of phenolic substances of BI on soil microorganism. With respect to the application of BII and BIII to soil, results shown a positive priming effect being the initial organic matter mineralisation very similar in all cases (*C* parameter ranged from 6.07 to 7.91) according to Méndez et al. (2012)

## Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



which found an increment of CO<sub>2</sub> emissions after application at the same rate after application of biochar prepared from sludge to a similar sandy soil or results obtained by Smith (2010). Nevertheless, Paz-Ferreiro et al. (2012) found a negative priming effect after sewage sludge biochar application to an Umbrisol. Indeed, Zimmerman et al. (2011) concluded that discrepancies in C mineralization of biochar-treated soils are likely due to the type of both soil and biochar, the duration of the experiment and the dose of used biochar.

Finally, C<sub>10</sub> parameter, i.e. evolved CO<sub>2</sub>-C after 10 days according the model, is related with the labile fraction of biochar to be released by microbial activity. Results show that experimental data were very similar and the different between experiment and addition (Table 4) in the case of S+ BI could suggest a toxic effect of biochar.

## 4 Conclusions

Experimental results show that cumulative CO<sub>2</sub> emissions were well fit to a simple first-order kinetic model for the different biochar and amended soil. Biochar produced from mixed wood sieving's from wood chip production had a negative priming effect while biochars prepared from paper sludge and wheat husks and sewage sludge had a positive priming effect. This fact can be related with combination of different biochar characteristics such as ash content, fixed carbon and volatile matter ratios or dichromate oxidized carbon content in addition to content in toxic substances as metals and soluble phenolic compounds. Also, biochars addition improved water soil retention. Finally, further research is required to determine the importance of the different biochar properties involved in soil CO<sub>2</sub> emissions.

*Acknowledgements.* We are very grateful to Delinat Institute for Ecology and Climate Framing (Switzerland) for providing the biochar samples.

## References

- Barrow, C.: Biochar: potential for countering land degradation and for improving agriculture, *Appl. Geogr.*, 34, 21–28, 2012.
- Bouyoucos, G. J.: Hydrometer method improved for makins paricle size analyses of soil, *Agron. J.*, 54, 464–465, 1962.
- Calvelo Pereira, R., Kaal, J., Camps Arbestain, M., Pardo Lorenzo, R., Aitkenhead, W., Hedley, M., Macías, F., Hindmarsh, J., and Maciá-Agulló, J. A.: Contribution to characterisation of Biochar to estimate the labile fraction of carbon, *Org. Geochem.*, 42, 1331–1342, 2011.
- Cross, A. and Sohi, S. P.: The priming potential of biochar products in relation to labile carbon contents and soil organic matter status, *Soil Biol. Biochem.*, 43, 2127–2134, 2011.
- European Community: Council Directive of 12 June 1986 on the protection of the environment, and in particular of the soil, when sewage sludge is used in agriculture, Directive 86/276/EEC, *Official Journal of the European Communities*, L 181, 6–12, 1986.
- Gascó, G., Paz-Ferreiro, J., and Méndez, A.: Thermal analysis of soil amended with sewage sludge and biochar from sewage sludge pyrolysis, *J. Therm. Anal. Calorim.*, 108, 769–775, 2012.
- Hossain, M. K., Strezov, V., Chan, K. Y., Ziokowski, A., and Nelson, P. F.: Influence of pyrolysis temperature on production and nutrient properties of wastewater sludge biochar, *J. Environ. Manage.*, 92, 223–228, 2011.
- Jones, D. L., Murphy, D. V., Khalid, M., Ahmad, W., Edwards-Jones, G., and DeLuca, T. H.: Short-term biochar-induced increase in soil CO<sub>2</sub> release is both biotically and abiotically mediated, *Soil Biol. Biochem.*, 43, 1723–1731, 2011.
- Kuzyakov, Y., Bogomolova, I., and Glaser, B.: Biochar stability in soil: decomposition during eight years and transformation as assessed by compound-specific <sup>14</sup>C analysis, *Soil Biol. Biochem.*, 70, 229–236, 2014.
- Lehmann, J.: A handful of carbon, *Nature*, 447, 143–144, 2007.
- Lehmann, J. and Sohi, S. P.: Comment on “Fire-derived charcoal causes loss of forest humus”, *Science*, 321, 1295, doi:10.1126/science.1160005, 2008.
- Lehmann, J. and Joseph, S. (Eds.): *Biochar for Environmental Management: Science and Technology*, Earthscan, London, 2009.

## SED

6, 849–868, 2014

### Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Martín-Lara, M. A., Hernáinz, F., Calero, M., Blázquez, G., and Tenorio, G.: Surface chemistry evaluation of some solid wastes from olive-oil industry used for lead removal from aqueous solutions, *Biochem. Eng. J.*, 44, 151–159, 2009.
- Méndez, A., Gómez, A., Paz-Ferreiro, J., and Gascó, G.: Effects of biochar from sewage sludge pyrolysis on Mediterranean agricultural soils, *Chemosphere*, 89, 1354–1359, 2012.
- Méndez, A., Tarquis, A., Saa-Requejo, A., Guerrero, F., and Gascó, G.: Influence of pyrolysis temperature on composted sewage sludge biochar priming effect in a loamy soil, *Chemosphere*, 93, 668–676, 2013.
- Nelson, D. and Sommers, L.: Total carbon, organic carbon and organic matter, in: *Methods of Soil Analysis, Part 3, Chemical Methods*, SSSA, Madison, USA, 1996.
- Paz-Ferreiro, J., Gascó, G., Gutierrez, B., and Méndez, A.: Soil activities and the geometric mean of enzyme activities after application of sewage sludge and sewage sludge biochar to soil, *Biol. Fert. Soils*, 48, 512–517, 2012.
- Paz-Ferreiro, J., Fu, S., Méndez, A., and Gascó, G.: Interactive effects of biochar and the earthworm *Pontoscolex corethrurus* on plant productivity and soil enzyme activities, *J. Soil. Sedi-ment.*, 14, 483–494, 2014.
- Richards, L. A.: *Diagnosis and Improvement of Saline and Alkali Soils*, Handbook No. 60, USDA, Washington, USA, 1954.
- Rhoades, J. D.: Salinity, Electrical conductivity and total dissolved solids, in: *Methods of Soil Analysis, Part 3, Chemical Methods*, SSSA, Madison, USA, 1996.
- Smith, J. L., Collins, H. P., and Bailey, V. L.: The effect of young biochar on soil respiration, *Soil Biol. Biochem.*, 42, 2345–2347, 2010.
- Sohi, S. P., Krull, E., Lopez-Capel, E., and Bol, R.: A review of biochar and its use and function in soil, *Adv. Agron.*, 105, 47–82, 2010.
- Sumner, M. and Miller, W.: Cation exchange capacity and exchange coefficients, in: *Methods of Soil Analysis, Part 3, Chemical Methods*, SSSA, Madison, USA, 1996.
- Thies, J. E. and Rillig, M. C.: Characteristics of biochar: biological properties, in: *Biochar for Environmental Management: Science and Technology*, Earthscan, London, 2009.
- Thomas, G. W.: Soil pH and soil acidity, in: *Methods of Soil Analysis, Part 3, Chemical Methods*, SSSA, Madison, USA, 1996.
- USDA: *Soil Quality Test Kit Guide*, USDA, Washington, USA, 1999.
- USEPA: *Method 3051a: microwave assisted acid dissolution of sediments, sludges, soils, and oils*, USDA, Washington, USA, 1997.

Wardle, D. A., Nilsson, M. C., and Zackrisson, O.: Fire-derived charcoal causes loss of forest humus, *Science*, 320, 5876, doi:10.1126/science.1154960, 2008.

Zavalloni, C., Alberti, G., Biasiol, S., Delle Vedove, G., Fornasier, F., Liu, J., and Peressotti, A.: Microbial mineralization of biochar and wheat straw mixture in soil: a short-term study, *Appl. Soil Ecol.*, 50, 45–51, 2011.

Zimmerman, A. R., Gao, B., and Ahn, M.: Positive and negative carbon mineralization priming effects among a variety of biochar amended soils, *Soil Biol. Biochem.*, 43, 1169–1179, 2011.

## SED

6, 849–868, 2014

### Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**Table 1.** Main properties of the soil (S) and biochars.

	S	BI	BII	BIII
pH (1 : 2.5)	7.66	10.19	9.40	7.66
EC (1 : 2.5) (dS m <sup>-1</sup> , 25 °C)	70	1776	2330	3700
TOC (%)	6.30	87.71	59.90	25.15
CEC (cmol <sub>(+)</sub> kg <sup>-1</sup> )	15.87	23.77	20.97	24.19
Cd (mg kg <sup>-1</sup> )	–	0.43	0.72	4.98
Cr (mg kg <sup>-1</sup> )	–	21	32	76
Cu (mg kg <sup>-1</sup> )	–	15	37	406
Ni (mg kg <sup>-1</sup> )	–	18	30	78
Pb (mg kg <sup>-1</sup> )	–	4	24	141
Zn (mg kg <sup>-1</sup> )	–	47	134	1350
Phenolic substances (mg gallic acid g <sup>-1</sup> )		0.93	1.01	0.49
Sand (%)	77.78	–	–	–
Silt (%)	17.78	–	–	–
Clay (%)	4.44	–	–	–
Soil textural class (%)	Sandy loam	–	–	–
FC(%)		113	122	36
WP(%)		52.14	63.42	31.07
AW(%)		61.18	28.22	5.58
BET Surface Area (m <sup>2</sup> g <sup>-1</sup> )	–	332.138	92.6115	59.1572
Micropore area (m <sup>2</sup> g <sup>-1</sup> )	–	305.9972	66.9119	30.9545
Adsorption average pore width (Å)	–	21.2622	32.9697	77.1478
CO <sub>2</sub> micropore surface area (m <sup>2</sup> g <sup>-1</sup> )		414.206	229.399	86.329
CO <sub>2</sub> monolayer capacity (cm <sup>3</sup> g <sup>-1</sup> )		90.672	50.217	18.898
Proximate analysis				
VM (%) <sup>a</sup>	–	14.88	22.43	13.68
FC (%) <sup>b</sup>	–	77.25	42.72	12.77
Ash (%)	–	7.87	34.85	73.55
FC/(FC + VM)	–	0.84	0.66	0.48

<sup>a</sup> VM: Volatile matter.

<sup>b</sup> FC: Fixed carbon.

## Factors driving carbon mineralization priming effect

P. Cely et al.

**Table 2.** pH, electrical conductivity (EC), cation exchange capacity of treated soils after the incubation experiment.

	pH	EC ( $\mu\text{S cm}^{-1}$ )	CEC ( $\text{cmol}_{(c)} \text{ kg}^{-1}$ )
<i>S</i>	7.45ab	496a	15.71a
<i>S</i> + BI	7.68b	535a	16.28a
<i>S</i> + BII	7.47ab	624b	16.08a
<i>S</i> + BIII	7.29a	764c	17.07a

Values in column followed by the same letter are not significantly different ( $P = 0.05$ ) using Duncan test.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**Table 3.** Field capacity (FC), wilting point (WP) and available water (AW) after the incubation experiment.

	FC(%)	WP(%)	AW(%)
<i>S</i>	13.54a	11.04a	2.49a
<i>S+BI</i>	20.41c	13.79c	6.61b
<i>S+BII</i>	20.24c	13.91c	6.33b
<i>S+BIII</i>	16.31b	12.72b	3.60a

Values in column followed by the same letter are not significantly different ( $P = 0.05$ ) using Duncan test.



## Factors driving carbon mineralization priming effect

P. Cely et al.

**Table 4.** Influence of different biochar properties on the increment of soil CO<sub>2</sub> emissions after biochar application.

Value	pH	Electrical conductivity	Organic carbon	Metal content	Phenolic substances	Volatile matter	Fixed carbon	BET surface area	CO <sub>2</sub> micropore surface area and monolayer capacity
High	-	-	+	-	-	+	+	-	-
Normal	+	+	+	+	+	+	+	-	+
Low	-	+	-	+	+	-	-	-	+

+: positive effect.

-: negative effect.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## Factors driving carbon mineralization priming effect

P. Cely et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion




**Table 5.** CO<sub>2</sub>-C evolved (mg CO<sub>2</sub> 100 g<sup>-1</sup> dry weight) during incubation experiment and parameters estimated according to simple first-order kinetic model to describe the C mineralization in soil (S), biochars (BI, BII, BIII) and amended soils (S+ BI, S+ BII, S+ BIII). Root Mean Square Deviation (RMSD), correlation coefficient ( $r^2$ ) and coefficient of determination ( $R^2$ ) of the fitted model are shown.

Substrate		CO <sub>2</sub> evolved (mg C-CO <sub>2</sub> /100 g)	<i>m</i>	<i>C</i>	RMSD	$r^2$	C <sub>10</sub> <sup>b</sup> (mg C-CO <sub>2</sub> /100 g)
S		45.8	0.5524	5.81	1.23	0.996	20.72
BI		261.2	0.5513	32.15	10.94	0.989	114.41
BII		120.1	0.4092	25.51	6.69	0.975	65.46
BIII		125.6	0.5046	19.34	6.26	0.985	61.79
S+ BI	Experiment	57.1	0.5606	6.83	0.94	0.998	24.83
	Addition <sup>a</sup>	63.0	0.5521	7.91	1.34	0.997	28.22
S+ BII	Experiment	58.3	0.5987	6.07	0.86	0.999	24.10
	Addition	51.7	0.5262	7.22	1.22	0.997	24.25
S+ BIII	Experiment	56.1	0.5872	6.08	0.82	0.999	23.50
	Addition	52.2	0.5434	6.87	1.40	0.996	23.99

<sup>a</sup> The addition of the experimental data has been made taking into account a dose of 8%.

<sup>b</sup> C<sub>10</sub> is the evolved CO<sub>2</sub>-C after 10 days according the model.

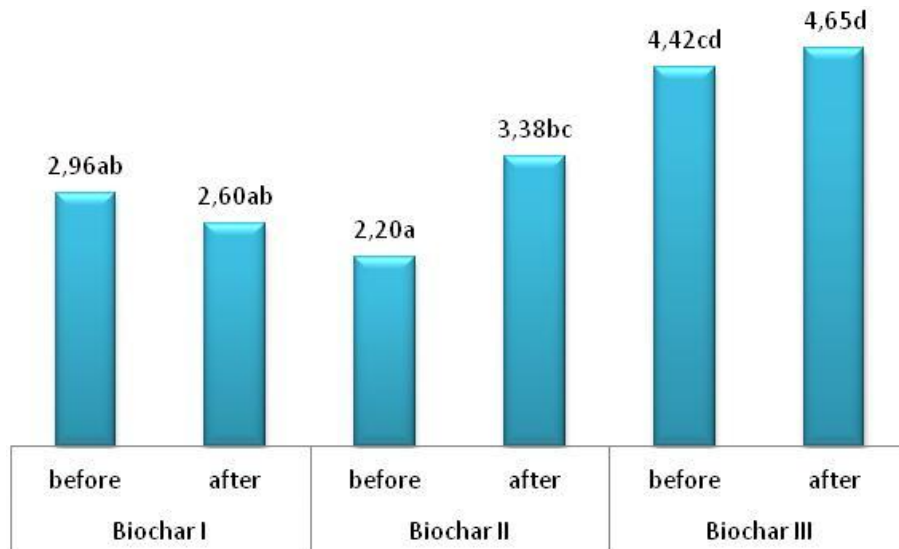

**Fig. 1.** Evolution of organic carbon oxidised with dichromate.

**Factors driving carbon mineralization priming effect**

P. Cely et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

⏪ ⏩

◀ ▶

Back Close

Full Screen / Esc


Printer-friendly Version

Interactive Discussion



## Factors driving carbon mineralization priming effect

P. Cely et al.

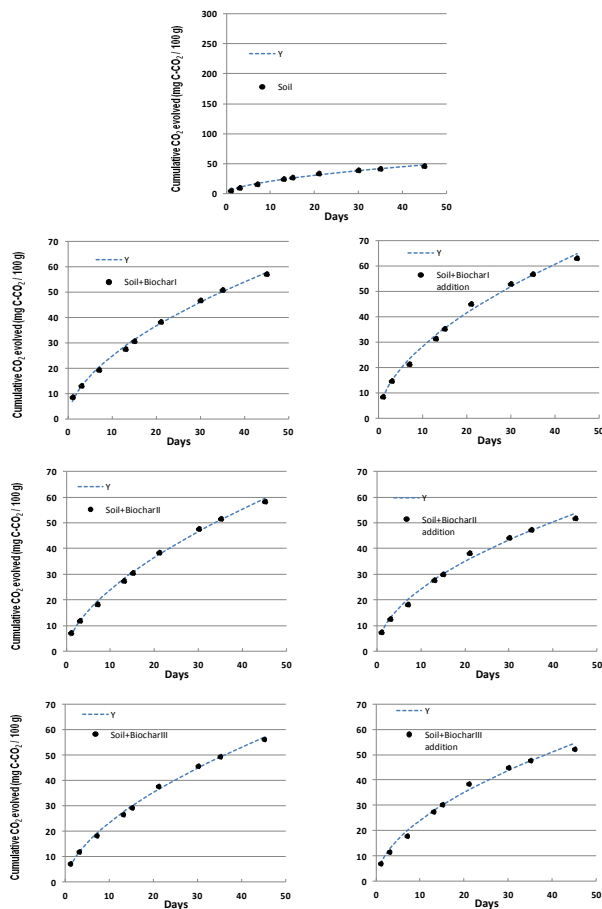

**Fig. 2.** Exponential model of measured C mineralized (as CO<sub>2</sub>) and that calculated by addition of soil and BI, BII and BIII effects.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

